

HIGH BAY HOT SERIES


THE HIGH BAY HOT SERIES' DESIGN IS BUILT FOR TEMPERATURES UP TO 176°F (80°C). THE INNOVATIVE, VERTICAL FLOW COOLING FIN DESIGN AND DRIVER BOX ALLOWS THE FIXTURE TO PERFORM IN HARSH, EXTREME HEAT ENVIRONMENTS SUCH AS DIE-CAST FACILITIES, FOUNDRIES, IRON FORGES, STEEL MILLS, POWER GENERATION, FACTORIES, AND CHEMICAL PLANTS.

CERTIFICATIONS AND RATINGS

UL1598 WET LOCATION
UL 8750 LED SAFETY
CSA C22.2 No. 250.13-14



DIMENSIONS

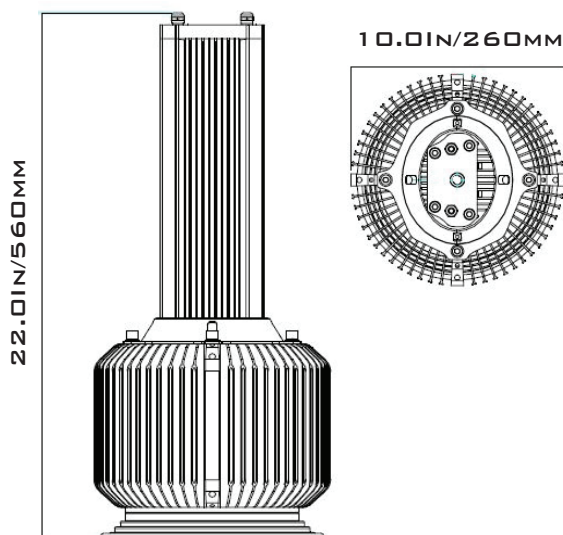

WEIGHT (LB/KG)
22.0/10.0

SPECIFICATIONS

VOLTAGE/FREQUENCY	120-277v, 347-480v; 50/60HZ
POWER	150W
LUMEN OUTPUT	19,600LM (110°) 17,223LM (60°)
EFFICACY	130LM/W 115LM/W
BEAM ANGLE	110° 60°
CONSTRUCTION	MARINE GRADE ALUMINUM
POWER FACTOR	>95% @120V
SURGE PROTECTION	6KVA
AMBIENT TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
LENS MATERIAL	TEMPERED GLASS
HARDWARE	STAINLESS STEEL
CONNECTION	3' CORD
COLOR RENDERING INDEX	RA>70
L70	75,000 HOURS @ 80°C
DIMMING	0-10V
MOUNTING	HANGING HOOK (STANDARD)
WARRANTY	STANDARD: 3 YEARS; EXTENDED: 5 YEARS*

*CONTACT US FOR EXTENDED WARRANTY INFORMATION

ORDER INFORMATION

HIGH BAY HOT SERIES

EXAMPLE: HBH-150-120-277-5000K-110

HBH	150	120-277	5000K	110
FIXTURE	WATTAGE	VOLTAGE	CCT	BEAM ANGLE
	150W	120-277V 347-480V	5000K 4000K	110° 60°**



ACCESSORIES

ALR: ALUMINUM REFLECTOR
TWIN: DUAL FIXTURE MOUNTING HARDWARE

**REQUIRES ALUMINUM REFLECTOR ACCESSORY

PHOTOMETRICS

OPTIONS

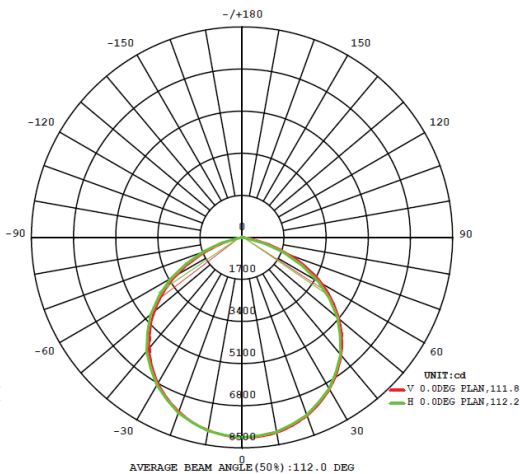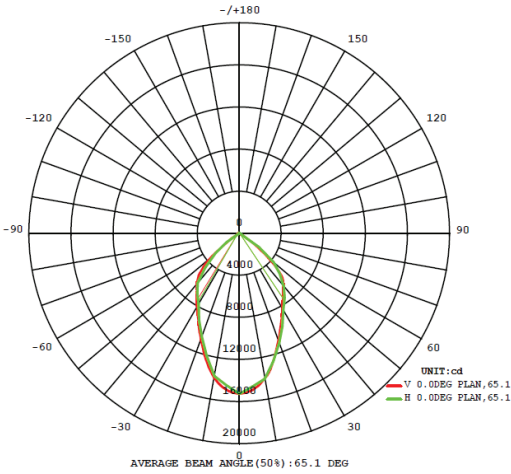

X2 150W FIXTURES SHOWN WITH
TWIN MOUNT KIT AND ALUMINUM REFLECTORS

