


## LINEAR LITE SERIES

COST-EFFECTIVE DURABILITY COMES TO HARSH, MARINE, AND INDUSTRIAL ENVIRONMENTS. THE LINEAR LITE SERIES IS ALL METAL WITH AVAILABLE TEMPERED GLASS, PC, OR PMMA LENSES. RATED IP66 WITH A POWDERCOATED, GALVANIZED STEEL BODY THE LINEAR LITE HANDLES WATER, DUST, CORROSION, AND OTHER ELEMENTS WITH EASE. SUITED FOR PAPER MILLS, MANUFACTURING, AND MINING INDUSTRIES.

## CERTIFICATIONS AND RATINGS

UL 1598 WET LOCATIONS  
UL 8750 LED SAFETY  
CSA C22.2 No. 250.13-14

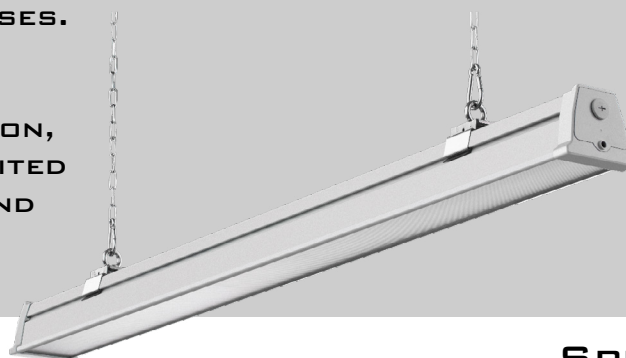


## DIMENSIONS

	A	B	C
20W	4.4/112	3.5/89	25.4/645
60W	4.4/112	3.5/89	59.1/1500

UNITS OF MEASUREMENT: IN/MM

### WEIGHT

20W -2.65LBS/1.2KGS  
60W -5.95LBS/2.7KGS

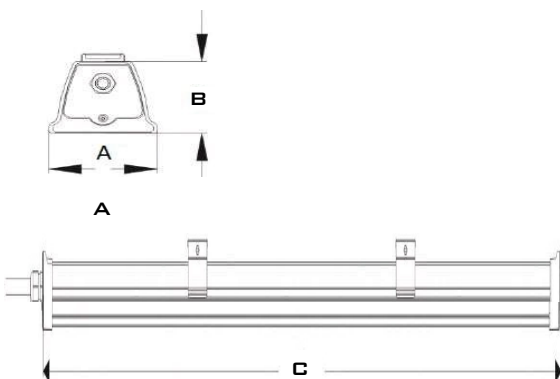

## SPECIFICATIONS

VOLTAGE/FREQUENCY	AC 120-277V 50/60HZ	
POWER	20W	60W
LUMEN OUTPUT*	2,400LM	7,200LM
EFFICACY	120LM/W	
BEAM ANGLES	60°	120°
CONSTRUCTION	POWDERCOATED GALVANIZED STEEL BODY POWDERCOATED DIE-CAST ALUMINUM END CAPS	
POWER FACTOR	>95% @ 120V	
SURGE PROTECTION	4KVA	
AMBIENT TEMPERATURE	-4°F TO 104°F (-20°C TO 40°C)	
LENS MATERIAL	TEMPERED GLASS, PC*, OR PMMA*	
HARDWARE	STAINLESS STEEL	
CONNECTION	1.2M/3.9' CABLE	
(CRI) COLOR INDEX	RA>80	
L70	70,000 HOURS	
DIMMING	0/1-10V	
WARRANTY	5 YEAR FIXTURE WARRANTY	

\*CONSULT FACTORY FOR LEAD TIME

\*OPTION MAY AFFECT LUMEN OUTPUT

ORDER INFORMATION

LINEAR LITE SERIES

EXAMPLE: LNL-60-120-277-5000K-120-DIFF-TG

LNL	60	120-277	5000K	120	DIFF	TG
FIXTURE	WATTAGE	VOLTAGE	CCT	BEAM ANGLE	LENS	MATERIAL
	20W 60W	120-277V	5000K 4000K	120° 60°*	DIFF-DIFFUSE CLR-CLEAR	TG-TEMPERED GLASS PC-POLYCARBONATE* PMMA-ACRYLIC*

ACCESSORIES

CHM: CABLE HANG MOUNT


WG: WIRE GUARD

PVT: AJUSTABLE PIVOT MOUNT

\*CONSULT FACTORY FOR LEAD TIME

PHOTOMETRICS

OPTIONS

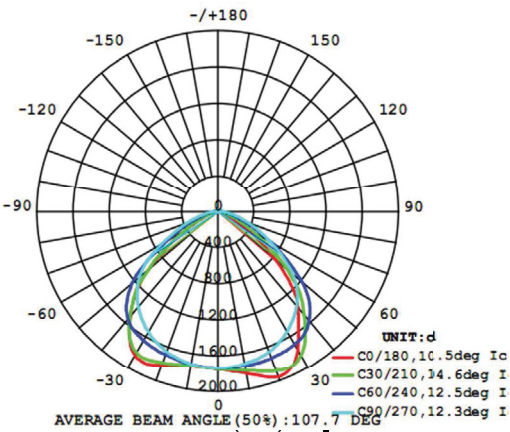

WG: WIRE GUARD

