


LINEAR SERIES

THE LINEAR SERIES FEATURES A DURABLE CONSTRUCTION TO ENDURE ENVIRONMENTS WHERE MOISTURE, GASES, DIRT, CORROSION, AND VIBRATION MAY BE PRESENT. WITH IT'S COMPACT, LOW PROFILE DESIGN, THIS FIXTURE IS PERFECT FOR LOW CEILING APPLICATIONS IN WALKWAYS, OVERHANGS, WORK STORAGE AREAS, AND TUNNELS.

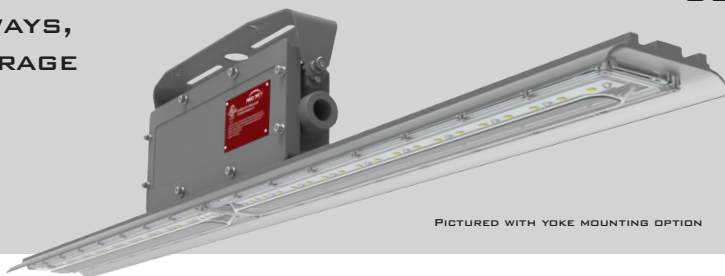

PICTURED WITH YOKE MOUNTING OPTION

CERTIFICATIONS AND RATINGS

CLASS I DIVISION 2, GROUPS A,B,C,D
CLASS II DIVISION 1, GROUPS E,F,G
CLASS III
CSA C22.2 No. 137-M1981
CSA C22.2 No. 250.0-08, 250.13-14
UL 844 HAZARDOUS LOCATION
UL 1598A MARINE VESSELS
UL 1598 WET LOCATIONS
UL 8750 LED SAFETY




DIMENSIONS

	A	B	C
40W	7.6/192	5.0/127	23.7/600
80W	7.6/192	5.0/127	47.3/1200

UNITS OF MEASURE: IN/MM

WEIGHT

40W	11.0LB/5.0KG
80W	15.2LB/6.9KG

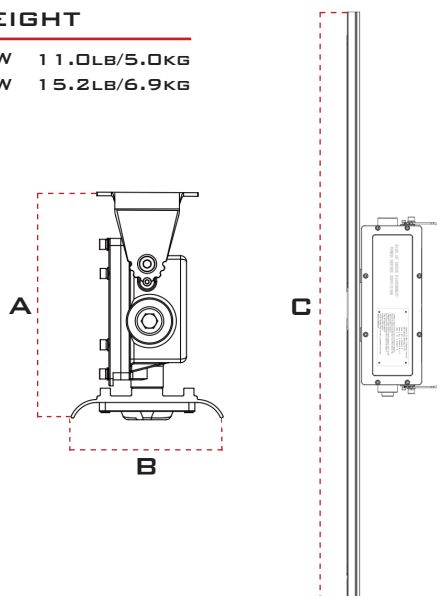

SPECIFICATIONS

VOLTAGE/FREQUENCY	AC 120-277V 50/60HZ AC 347-480V 50/60HZ	
POWER FACTOR	≥95% @ 120V	
THD	≤20%; ≤10%	
SURGE PROTECTION	4KVA	
AMBIENT TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)	
T-CODE RATING	CLASS I DIVISION 2 - T3C CLASS II DIVISION 1 - T4A	
CONSTRUCTION	MARINE GRADE EXTRUDED ALUMINUM HOUSING AND DIE-CAST DRIVER BOX	
LENS MATERIAL	POLYCARBONATE	
HARDWARE	MARINE GRADE STAINLESS STEEL	
FINISH	THERMOSET POWDERCOAT	
CONNECTION	3/4" NPT	
POWER	40W	80W
LUMEN OUTPUT	5,965LM	11,140LM
BEAM ANGLE	110°	
COLOR RENDERING INDEX	RA>70	
L70	>120,000 HOURS @ 50°C	
WARRANTY	LEDs: 10 YEARS DRIVER: 7 YEARS	

ORDER INFORMATION

LINEAR SERIES

EXAMPLE: LNR-40-120-277-5000K-CLR-GREY-PEND


LNR	40	120-277	5000K	CLR	GREY	PEND
FIXTURE	WATTAGE	VOLTAGE	CCT	LENS	COLOR	MOUNTING
	40W	120-277	5000K	CLEAR	GREY	PENDANT
	80W	347-480	4000K	DIFFUSE		YOKE
			3000K**			

ACCESSORIES

- CHAIN: CHAIN MOUNTING KIT
- CLAMP: PIPE CLAMP KIT*
- SFCB: SAFETY CABLE KIT
- YOKE: YOKE MOUNT KIT
- SP1: 10KA SURGE PROTECTOR

*MUST BE ORDERED WITH YOKE MOUNTING OPTION
**CONTACT US

PHOTOMETRICS

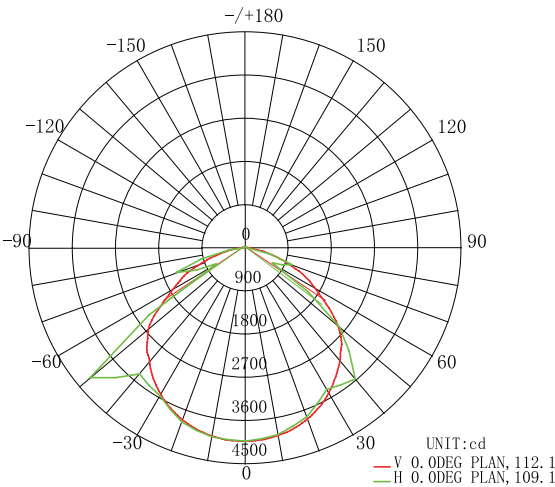

AVERAGE BEAM ANGLE(50%):110.6 DEG

