



BLOCK-MINI SERIES H2


COMPACT LED FIXTURE PACKS A POWERFUL PUNCH

This CID2 and CID1 lightweight, compact, LED area light packs a powerful punch by producing up to 200 lumens per watt and utilizing the industry favorite line of seven mounting options.

It is ideally suited for low mounting heights in harsh and hazardous marine, power and chemical environments in which ignitable concentrations of hazards are normally in closed containers or closed systems.



RED SKY
SERIOUSLY SAFE LIGHTS™

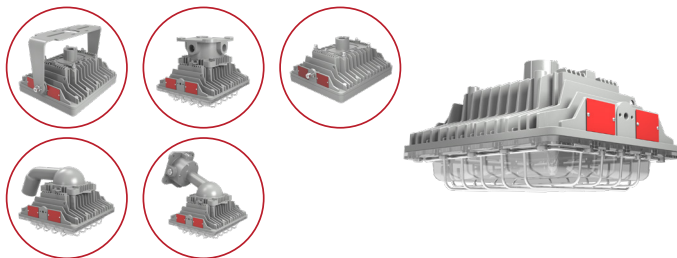

RATINGS & CERTIFICATIONS

- > Class I Division 2
- > Class II Division 1
- > Class III



SPECIFICATIONS

VOLTAGE/FREQUENCY	120-277V AC 347-480V AC 50/60HZ
POWER	21W 40W 50W 60W
LUMEN OUTPUT	4220/6500/7180/8515
AVAILABLE BEAM ANGLES	T2/T3/T5
OPERATING TEMPERATURE	21W / 40W / 50W : -40°F ~ +149°F (-40°C ~ +65°C) 60W : -40°F ~ +147°F (-40°C ~ +64°C)
DIMENSIONS	9.7×8.3×5.1in (246×210× 142 mm)
WEIGHT	13.9lbs/6.3kg
CONSTRUCTION	Marine Grade Cast Aluminum
LENS MATERIAL	Tempered glass(Clear/Frosted)/Polycarbonate(Diffused only)
HARDWARE	Stainless Steel 316
FINISH	Thermoset Powdercoat
CONNECTION	(1) 3/4" NPT w/ 3' 18/3 cord or leads
L70	130,000 Hours@149°F
WARRANTY	LEDs: 10 years Driver: 7 years

CONTACT OUR TEAM TODAY

1 (833) 4 REDSKY
contact@redskylighting.com
www.redskylighting.com