


LINEAR TUFF SERIES

LOW PROFILE, LINEAR, EXPLOSION PROOF LIGHT

Sleek but rugged, this fixture is designed to meet the most demanding harsh and hazardous environments.

Rated up to Class I Division 1, the Linear Tuff is also low maintenance and energy efficient. Available in 2' and 4' lengths, this fixture is suitable for low profile applications in petrochemical facilities, marine vessels, drilling rigs, loading docks, and mining tunnels, and oil and gas refineries.

RED SKY
SERIOUSLY SAFE LIGHTS™

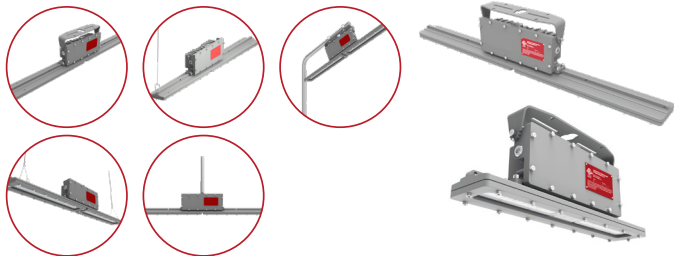

RATINGS & CERTIFICATIONS

- > Class I Division 1
- > Class I Division 2



SPECIFICATIONS

VOLTAGE/FREQUENCY	100-277V AC, 347-480V AC 50/60Hz
POWER	40W, 80W
LUMEN OUTPUT	4425/9160
AVAILABLE BEAM ANGLES	60° /110° /T2
OPERATING TEMPERATURE	-40°F ~ +144°F (-40°C ~ +60°C)
DIMENSIONS	40W: 21.4×4.3×7.3in (544×108×185 mm) 80W: 43.3×4.3×7.3in (1100×108×185 mm)
WEIGHT	16.3lbs/7.4kg; 23.8lbs/10.8kg
CONSTRUCTION	Marine Grade Cast Aluminum
LENS MATERIAL	Tempered Glass
HARDWARE	Stainless Steel 316
FINISH	Thermoset Powdercoat
CONNECTION	(3) 3/4" NPT
L70	140,000 Hours@144°F
WARRANTY	LEDs: 10 years Driver: 7 years

CONTACT OUR TEAM TODAY

1 (833) 4 REDSKY
contact@redskylighting.com
www.redskylighting.com