

CRANE MASTER SERIES UL

LED LIGHTING FOR HARSH AREAS
FLOOD



Reliable. Durable. Efficient.
43,000 lumen models

RED SKY
SERIOUSLY SAFE LIGHTS™

ABOUT RED SKY LIGHTING


PIONEERING INDUSTRIAL ILLUMINATION FOR HARSH & HAZARDOUS CONDITIONS

A leading manufacturer of premium LED lights for demanding work conditions

Headquartered in California, products assembled in the USA

Servicing global clients across 4 continents in metal processing, oil & gas, marine, manufacturing

Renowned for quality, dependability, client care and uncompromising safety standards

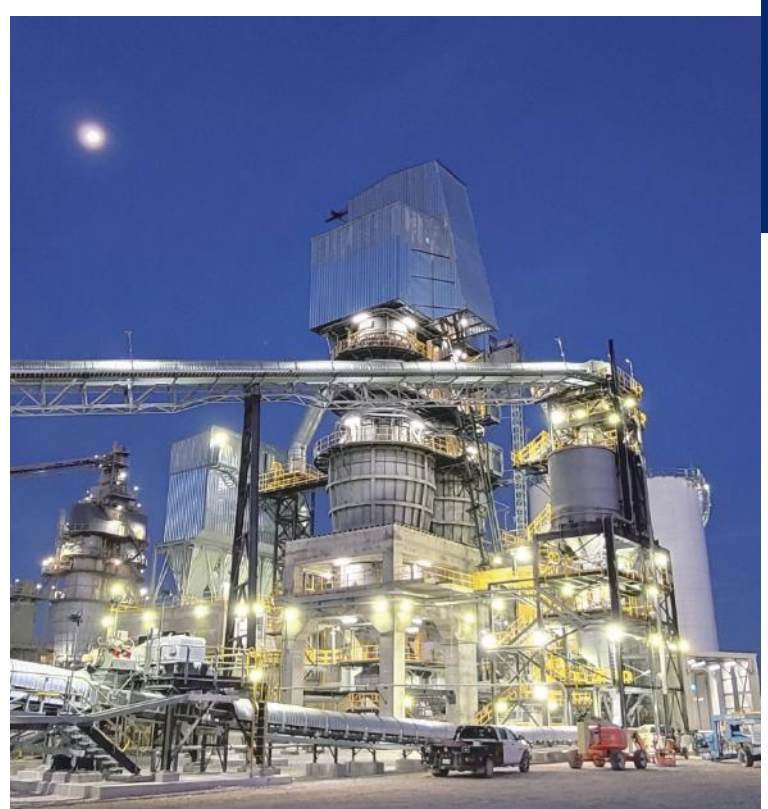

WHY CHOOSE RED SKY

SERIOUSLY SAFE LIGHTS

- Rigorously tested in our professional labs
- Surpassing industry certifications and safety protocols
- Crafted with highest grade components for maximum durability

TOP-NOTCH SERVICES

- Team of experts for seamless support
- Energy audit services, lighting simulation services
- Hassle-free return policy and management

FAST DELIVERY

- Majority of orders delivered within 14 days
- Same day shipping for products in stock
- Real-time order tracking for full transparency




SUSTAINABLE SOLUTIONS

- High luminous efficacy LEDs for energy savings
- Conscious product design
- Recyclable materials for products and packaging



FEATURES



-  **5 Choices of Light Distributions**
30° / 60° / 90° / 120° / 30*120°
available for different applications from narrow to assymetric light distribution
-  **Easy and Through Wiring**
Built-in wiring compartment with two cable entries and WAGO 221 lever connectors for easy wiring (1-4mm²)
-  **The damper bracket is rotatable and ensures light is constantly targeted where required**

RATINGS

UL 1598 Wet Locations
UL 1598A Marine Outside Type (Salt Water)
IP67
IK08

CERTIFICATIONS

UL1598
UL1598A
CSA C22.2 NO. 250.0


TECHNICAL PARAMETERS

Specification	CMF-300
Electrical Parameters	
Power	300W
Voltage/Frequency	100-277V AC, 347-480V AC 50/60Hz
Power Factor	>90%
THD	<20%
L70	140,000 Hours@50°C
Warranty	5 years
Optical Parameters	
Lumen Output*	42,211Lm
Lumen Efficacy*	140Lm/W
Available Beam Angle	30°/60°/90°/30°*120°(PC)/120°(Glass)
Correlated Color Temperature (CCT)	3000K/4000K/5000K/5700K
Color Rendering Index (CRI)	Ra>70
Mechanical Parameters	
Finish	Polyster powder coating for uniform corrosion resistance
Hardware	Stainless steel 316
Lens Material	Clear Glass or Clear PC
Mounting Options	Yoke
Product Weight	30.9lbs/14kg
Cable Entry	2 x M20
Product Dimensions(L×W×H)	20.78×11.46×6.55 in (527.7×291.2×166.3 mm)
Environmental Parameters	
Ambient Operating Temperature	-40°C~+55°C

* Value calculated based on 5700K and clear glass ,varies to different spec.

ORDERING INFORMATION

EXAMPLE: CMF-300-100-277-57K-90-CG-GRY-YKE

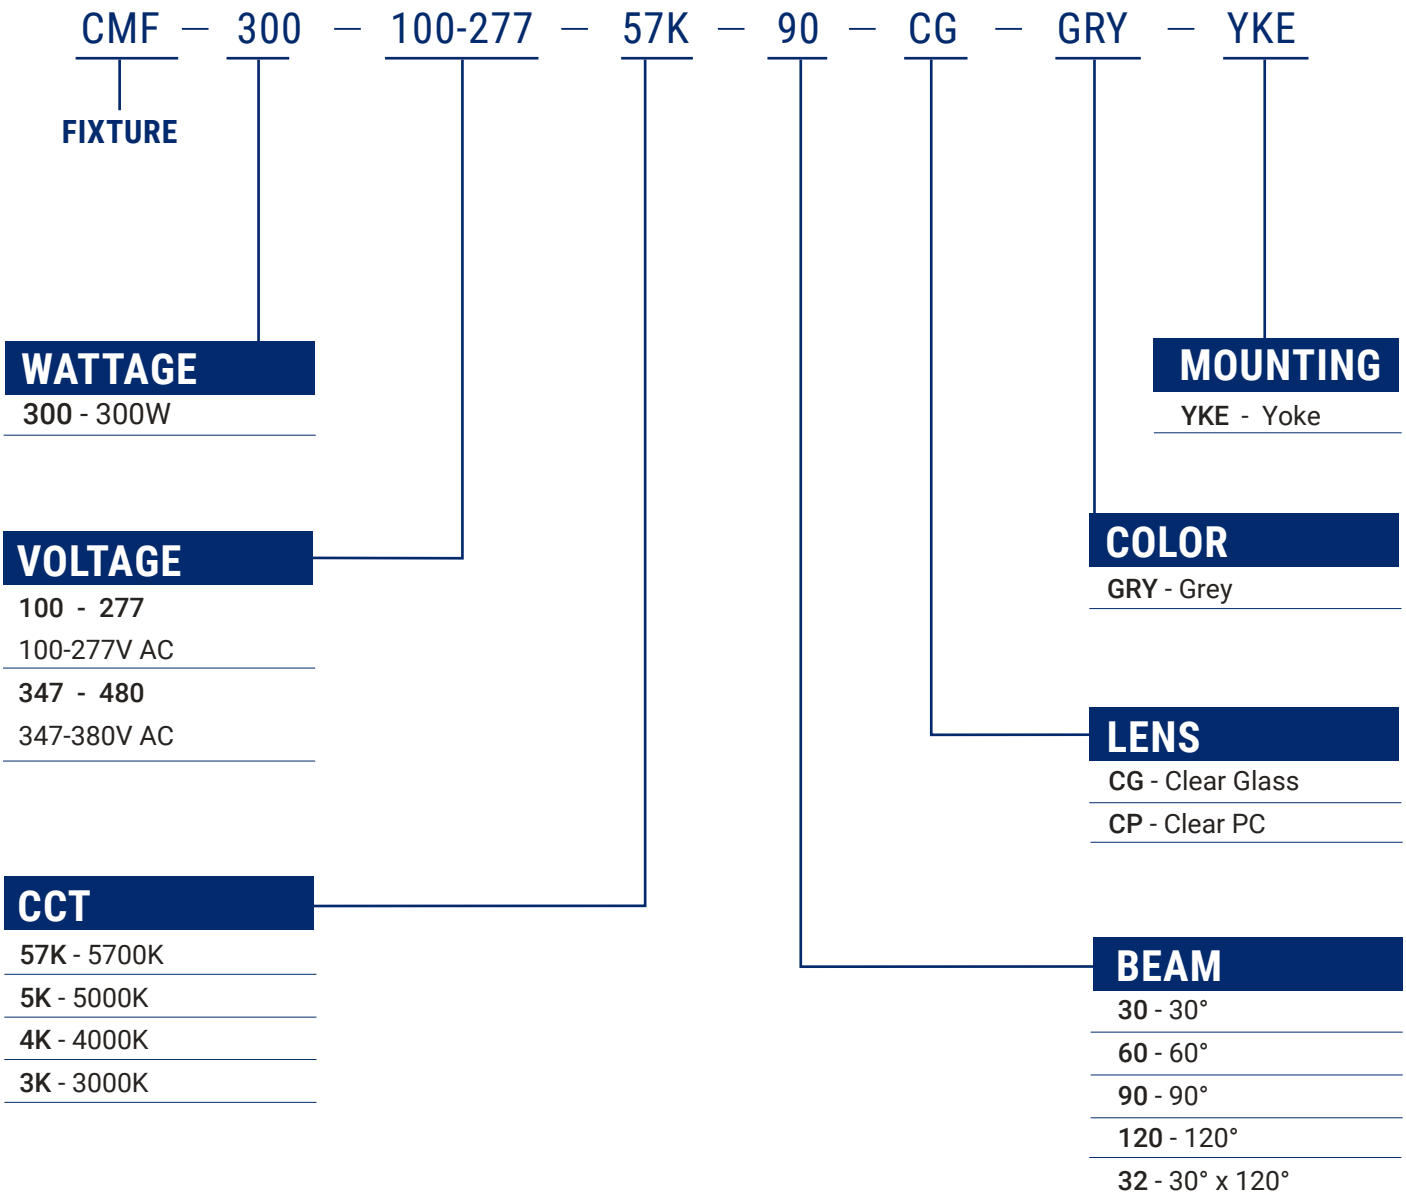

MOUNTING ACCESSORIES



Yoke
(SUS304)



Yoke with
Damper Bracket




SC05

Pard Number	Description	MPN Code
DPY01	Crane Damper Bracket, SUS304, Fixed with M10 Bolts	309050274
SFCB01	Safety Cable Kit, SUS304	106060018

LUMEN TABLE




Part Number	Wattage (W)	CCT	Beam	Lens	Lumen Output (Lm)	
Voltage 100-277VAC						
CMF-300-100-277-5K-120-HS-CG-GRY-YKE	300	5000K	120°	Clear Glass	42,211	154
CMF-300-100-277-5K-30-HS-CP-GRY-YKE	300	5000K	30°	Clear PC	37,674	137
CMF-300-100-277-5K-60-HS-CP-GRY-YKE	300	5000K	60°	Clear PC	39,485	143
CMF-300-100-277-5K-90-HS-CP-GRY-YKE	300	5000K	90°	Clear PC	40,547	147
CMF-300-100-277-5K-32-HS-CP-GRY-YKE	300	5000K	30°x120°	Clear PC	38,919	141
Voltage 347-480V AC						
CMF-300-347-480-5K-120-HS-CG-GRY-YKE	300	5000K	120°	Clear Glass	42,617	152
CMF-300-347-480-5K-30-HS-CP-GRY-YKE	300	5000K	30°	Clear PC	37,724	134
CMF-300-347-480-5K-60-HS-CP-GRY-YKE	300	5000K	60°	Clear PC	39,632	141
CMF-300-347-480-5K-90-HS-CP-GRY-YKE	300	5000K	90°	Clear PC	40,800	145
CMF-300-347-480-5K-32-HS-CP-GRY-YKE	300	5000K	30°x120°	Clear PC	38,915	138

For additional information, please contact your sales representative.

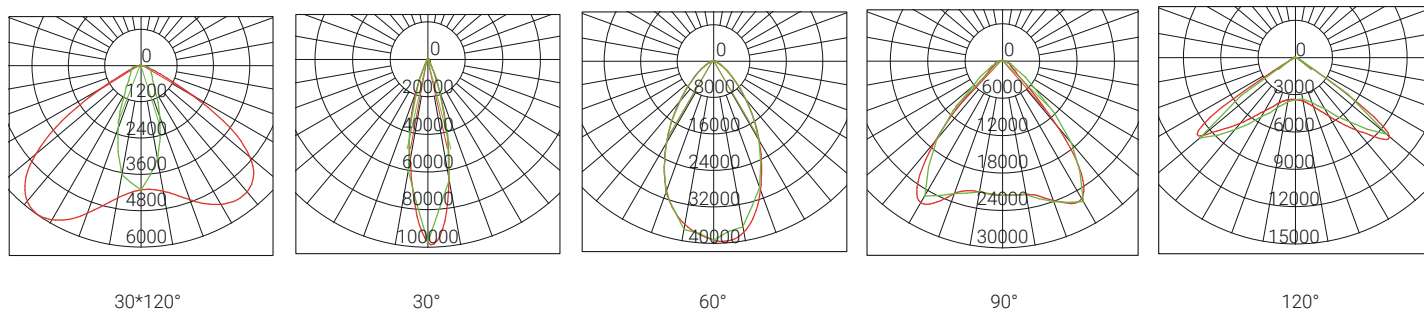


DIMENSIONS

unit: in(mm)

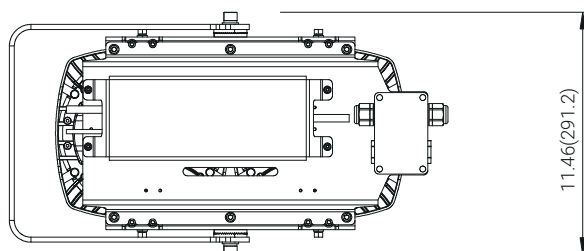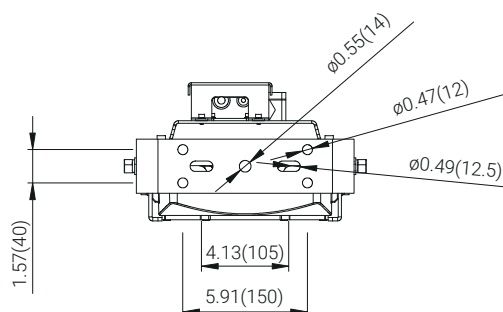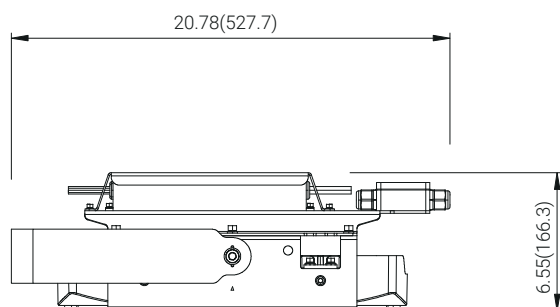

YOKE

unit: in(mm)

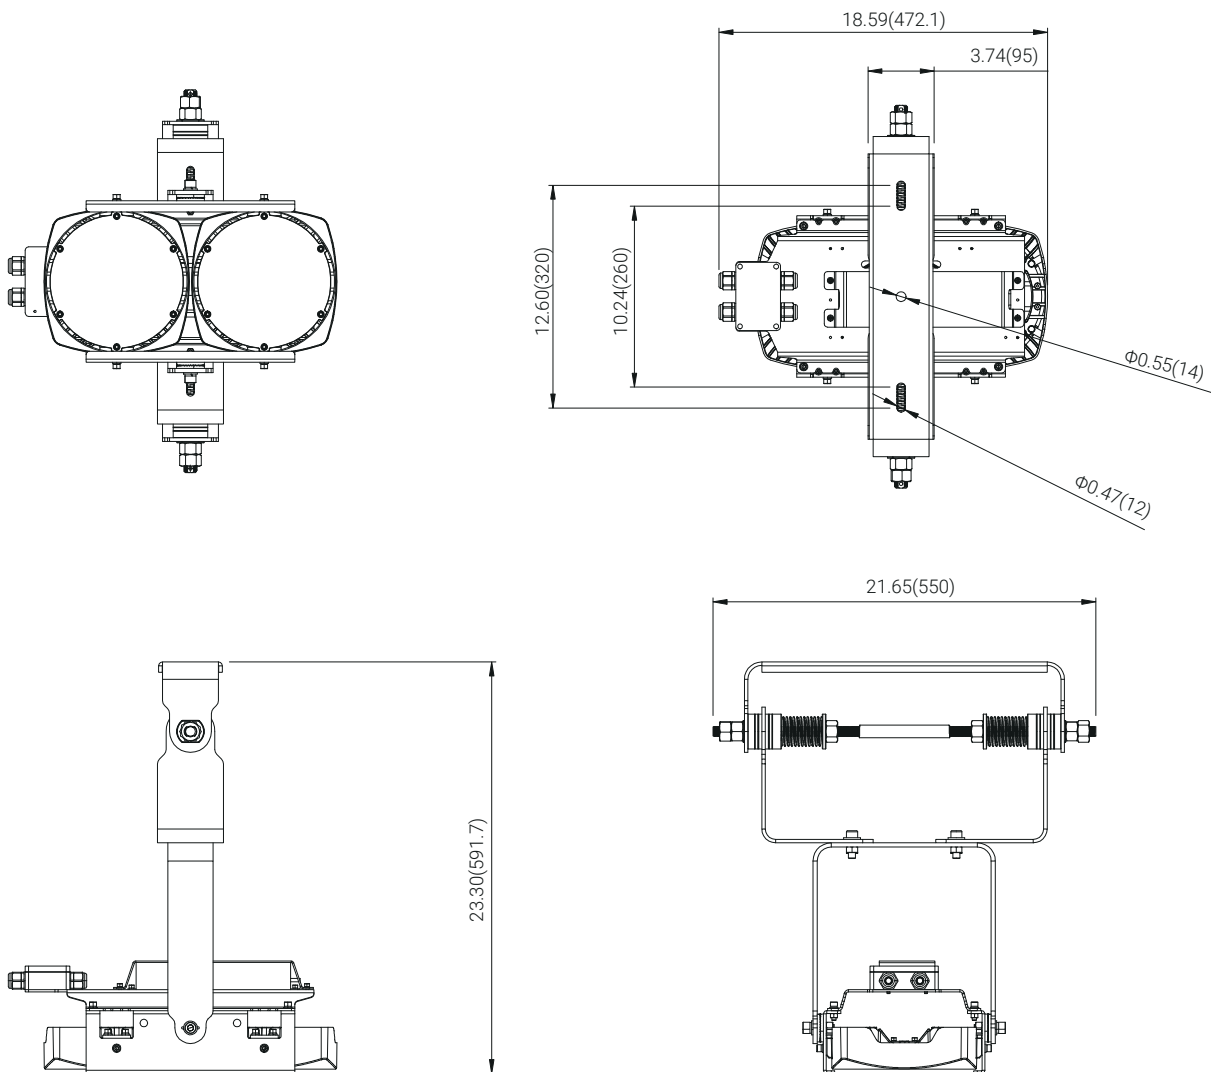

YOKE with Damper Bracket

HAZARDOUS LOCATION LIGHTING BASICS

Atmosphere Groups

Substance	Hazard Class	Division Groups	Zone Groups
Acetylene	Class I Flammable Gases	Group A	IIC
Hydrogen		Group B	IIC
Ethylene		Group C	IIB
Propane		Group D	IIA
Methane		Group D	IIA ²
Combustible Metal Dusts	Class II Combustible Dusts	Group E ¹	IIIC ³
Combustible Carbonaceous Dust		Group F	IIIB ³
Combustible Dusts not in Group E or F (Flour, Grain, Wood, Plastics, Chemicals)		Group G	IIIB ³
Combustible Fibers and Flyings	Class III Fibers and Flyings	Not Applicable	IIIA ³

Note 1: Group E is applicable to Class II, Division 1 only.
 Note 2: Methane is a Group IIA Gas for non-mining applications.
 Note 3: Group IIIA, IIIB and IIIC have not been adopted by the Canadian Electrical Code.

Temperature Classification

Max. Surface Temperatures	NEC® 500 CEC®	NEC® 500/IEC-Group II
450(842)	T1	T1
300(572)	T2	
280(536)	T2A	
260(500)	T2B	T2
230(446)	T2C	
215(419)	T2D	
200(392)	T3	T3
180(256)	T3A	
165(329)	T3B	
160(320)	T3C	
135(275)	T4	T4
120(248)	T4A	
100(212)	T5	T5
85(185)	T6	T6

Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone 1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone 2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

IP Codes

1st No.	Solid Objects
0	No protection
1	Objects greater than 50mm
2	Objects greater than 12.5mm
3	Objects greater than 2.5mm
4	Objects greater than 1mm
5	Dust protected
6	Dust proof
2nd No.	Liquids
0	No protection
1	Vertically dripping
2	Dripping up to 15°
3	Limited spraying
4	Splashing from all directions
5	Hosing jets from all directions
6	Strong hosing jets from all directions
7	Temporary immersion
8	Continuous immersion
9	Steam-jet cleaning

IK Ratings

IK Code	Level of Protection Achieved
IK00	Not protected
IK01	Protected against 0.14 joules impact
IK02	Protected against 0.2 joules impact
IK03	Protected against 0.35 joules impact
IK04	Protected against 0.5 joules impact
IK05	Protected against 0.7 joules impact
IK06	Protected against 1 joules impact
IK07	Protected against 2 joules impact
IK08	Protected against 5 joules impact
IK09	Protected against 10 joules impact
IK10	Protected against 20 joules impact



1(262) 456-5002
contact@redskylighting.com
www.redskylighting.com

RED SKY LIGHTING LLC
9370 Pittsburgh Ave Rancho
Cucamonga, CA 91730, USA

Disclaimer

The product information provided is, to the best of Red Sky Lighting's knowledge, accurate as of the date of publication. However, purchasers and end-users of Red Sky Lighting's products should refer to the documentation available on www.redskylighting.com for the most up-to-date and controlling product specifications, installation manuals, sales terms and conditions, and warranty terms. To the extent any contract is formed for the sale of Red Sky Lighting's products, whether directly with Red Sky Lighting or through any third party, the versions of such documentation posted on www.redskylighting.com as of the date of sale shall govern and prevail over any inconsistent information that may be provided elsewhere. In the event of a conflict between the information contained in this document and that available on www.redskylighting.com, the website documentation shall control.