



red**dot** winner 2024
lighting design

MODULAR MAX SERIES

LED LIGHTING FOR HARSH AND HAZARDOUS AREAS
FLOOD & HIGHBAY




Reliable. Durable. Efficient.
15,000 to 66,000 lumen models

RED SKY
SERIOUSLY SAFE LIGHTS™

ABOUT RED SKY LIGHTING

PIONEERING INDUSTRIAL ILLUMINATION FOR HARSH & HAZARDOUS CONDITIONS

- A leading manufacturer of premium LED lights for demanding work conditions
- Headquartered in California, products assembled in the USA
- Servicing global clients across 4 continents in metal processing, oil & gas, marine, manufacturing
- Renowned for quality, dependability, client care and uncompromising safety standards

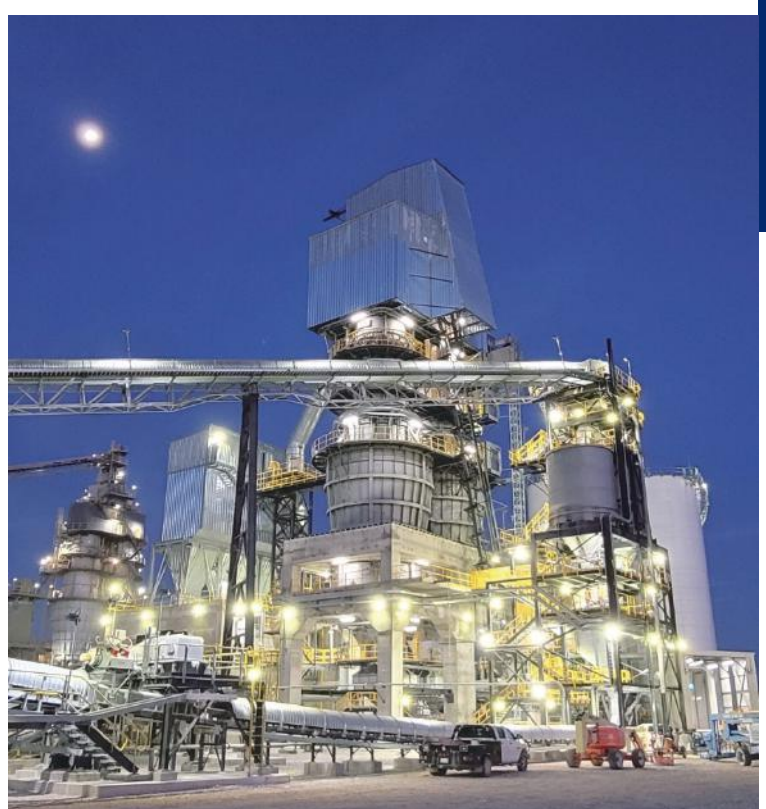

WHY CHOOSE RED SKY

SERIOUSLY SAFE LIGHTS

- Rigorously tested in our professional labs
- Surpassing industry certifications and safety protocols
- Crafted with highest grade components for maximum durability

TOP-NOTCH SERVICES

- Team of experts for seamless support
- Energy audit services, lighting simulation services
- Hassle-free return policy and management

FAST DELIVERY

- Majority of orders delivered within 14 days
- Same day shipping for products in stock
- Real-time order tracking for full transparency

SUSTAINABLE SOLUTIONS

- High luminous efficacy LEDs for energy savings
- Conscious product design
- Recyclable materials for products and packaging



MODULAR MAX SERIES



The Modular Max Series packs powerful performance with a high lumen output of up to 70,000 lumens and excellent luminous efficacy of up to 166 lm/W. This is achieved while maintaining a lightweight and compact design, making it over 25% lighter than comparable C1D2/C2D1 floodlights.

Certified for C1D2/C2D1 hazardous locations, the Modular Max Series withstands even the harshest environments. Its craftsmanship and rigorous testing ensure optimal performance under extreme conditions, maintaining high output from -49°F to +149°F (-45°C to +65°C). An outstanding thermal design and robust quality provide durable operation.

Versatile, intelligent design allows equal use as a floodlight or high bay solution. Unique product structure design simplifies installation and manufacturing. The light housing utilizes recyclable metal alloys, supporting sustainability. Additional accessories reduce light pollution, Red Sky Lighting is committed to responsible, efficient, and eco-friendly solutions. The Modular Max Series delivers unprecedented performance for demanding industrial applications.



FEATURES



Compact and Light-Weight Design

Offering 15,000-66,000 Lm Wide Range Selection

Safe and Reliable Heat Transfer, Can be Used in High/Low Ambient Temperatures

-49°F to +149°F for 15,000 - 30,000 Lm
-49°F to +131°F for 37,000 - 66,000 Lm

Easy Installation

Easy Wiring, More Room for Wiring

Warranty

Standard: 7 Years
Extended: 10 years

RATINGS

Class I Division 2, Groups A, B, C, D	UL 1598 Wet Locations
Class II Division 1 Group E, F, G	UL 1598A Marine Outside Type (Salt Water)
Class II Division 2, Groups F, G	IP66/67, NEMA 4X
Class III	IK10
Simultaneous Presence	3G Vibration (ANSI C136.31)
Class I, Zone 2, Group IIC	Salt Spray 720 hrs (ISO 9227)
Zone 20, 21 & 22	

CERTIFICATIONS

UL844
UL1598
UL1598A
CSA C22.2 No. 250.0
CSA C22.2 No. 137
DLC Premium*
FCC 47 CFR Part 15 Subpart B

* Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification.

TECHNICAL PARAMETERS

Specification	MDX-15L	MDX-20L	MDX-30L	MDX-40L	MDX-50L	MDX-60L	MDX-70L
Electrical Parameters							
Power	90W	120W	190W	260W	310W	380W	440W
Rated Input Current(120V AC)	0.833A	1.111A	1.759A	2.407A	2.870A	3.519A	4.074A
Rated Input Current(277V AC)	0.361A	0.481A	0.762A	1.043A	1.244A	1.524A	1.765A
Rated Input Current(347V AC)	0.288A	0.384A	0.608A	0.833A	0.993A	1.217A	1.409A
Rated Input Current(480V AC)	0.208A	0.278A	0.440A	0.602A	0.718A	0.880A	1.019A
Voltage/Frequency	100-277V AC, 347-480V AC 50/60Hz						
Power Factor	>0.90						
THD	<20%						
L70	230,000 hrs@149°F				230,000 hrs@131°F		
Dimming	0-10V, Range 10% - 100%						
Surge Protection*	10KV/5KA						
Supply Wire	12-18AWG, Rated 90°C min					12-17AWG, Rated 90°C min	
Warranty	Standard: 7 Years, Extended: 10 years						
Optical Parameters							
Lumen Output**	15,074Lm	19,854Lm	29,148Lm	37,730Lm	47,974Lm	59,028Lm	66,313Lm
Lumen Efficacy**	166Lm/W						
Available Beam Angle	30° / 60° / 90° / 120° / T2 / T3 / T5						
Correlated Color Temperature (CCT)	2700K / 4000K / 5000K						
Color Rendering Index (CRI)	80 CRI						
Mechanical Parameters							
Housing Material	Copper-free (< 0.4%) die-cast aluminum						
Hardware	Stainless steel 316						
Lens Material	Tempered Glass						
Mounting Options	Pendant, Straight Yoke, Angled Yoke, Chain, Stanchion						
Product Weight	21.8lbs / 9.9kg				36.3lbs / 16.5kg		
Package Weight	23.9lbs / 10.9kg				40.1lbs / 18.2kg		
Cable Entry	(5) 3/4" NPT***						
Product Dimensions(L×W×H)	14.1×9.8×7.4 in (357×250×189 mm)				9.9×14.1×7.4 in (505×357×189 mm)		
Package Dimensions(L×W×H)	19.7×13.4×11.8 in (500×340×300 mm)				23.6×19.7×11.8 in (600×500×300 mm)		
Environmental Parameters							
Corrosion Resistance	Salt Spray 720 hrs (ISO 9227)						
Vibration Resistance	3G (ANSI C136.31)						
Ambient Operating Temperature	-49°F ~ +149°F (-45°C ~ 65°C)			-49°F ~ +131°F (-45°C ~ 55°C)			
T-Code Rating	CID2 – T3C, C2D1 – T4						
EPA wind rating (FT2)	1.753 (Yoke), 1.888 (Stanchion)				2.864 (Yoke), 2.999 (Stanchion)		


* Surge protector included as standard configuration

** Value calculated based on 5000K and 90°, varies to different spec.

*** Shipped with 4 blind plugs, top entry open for pendant, 1 side entry on long side open for yoke mount (15L, 20L, 30L, 40L), 1 side entry on short side open for yoke mount(50L, 60L, 70L).

ORDERING INFORMATION

EXAMPLE: MDX-20L-100-277-5K-120-H2-CG-GRY-AYK BLANK

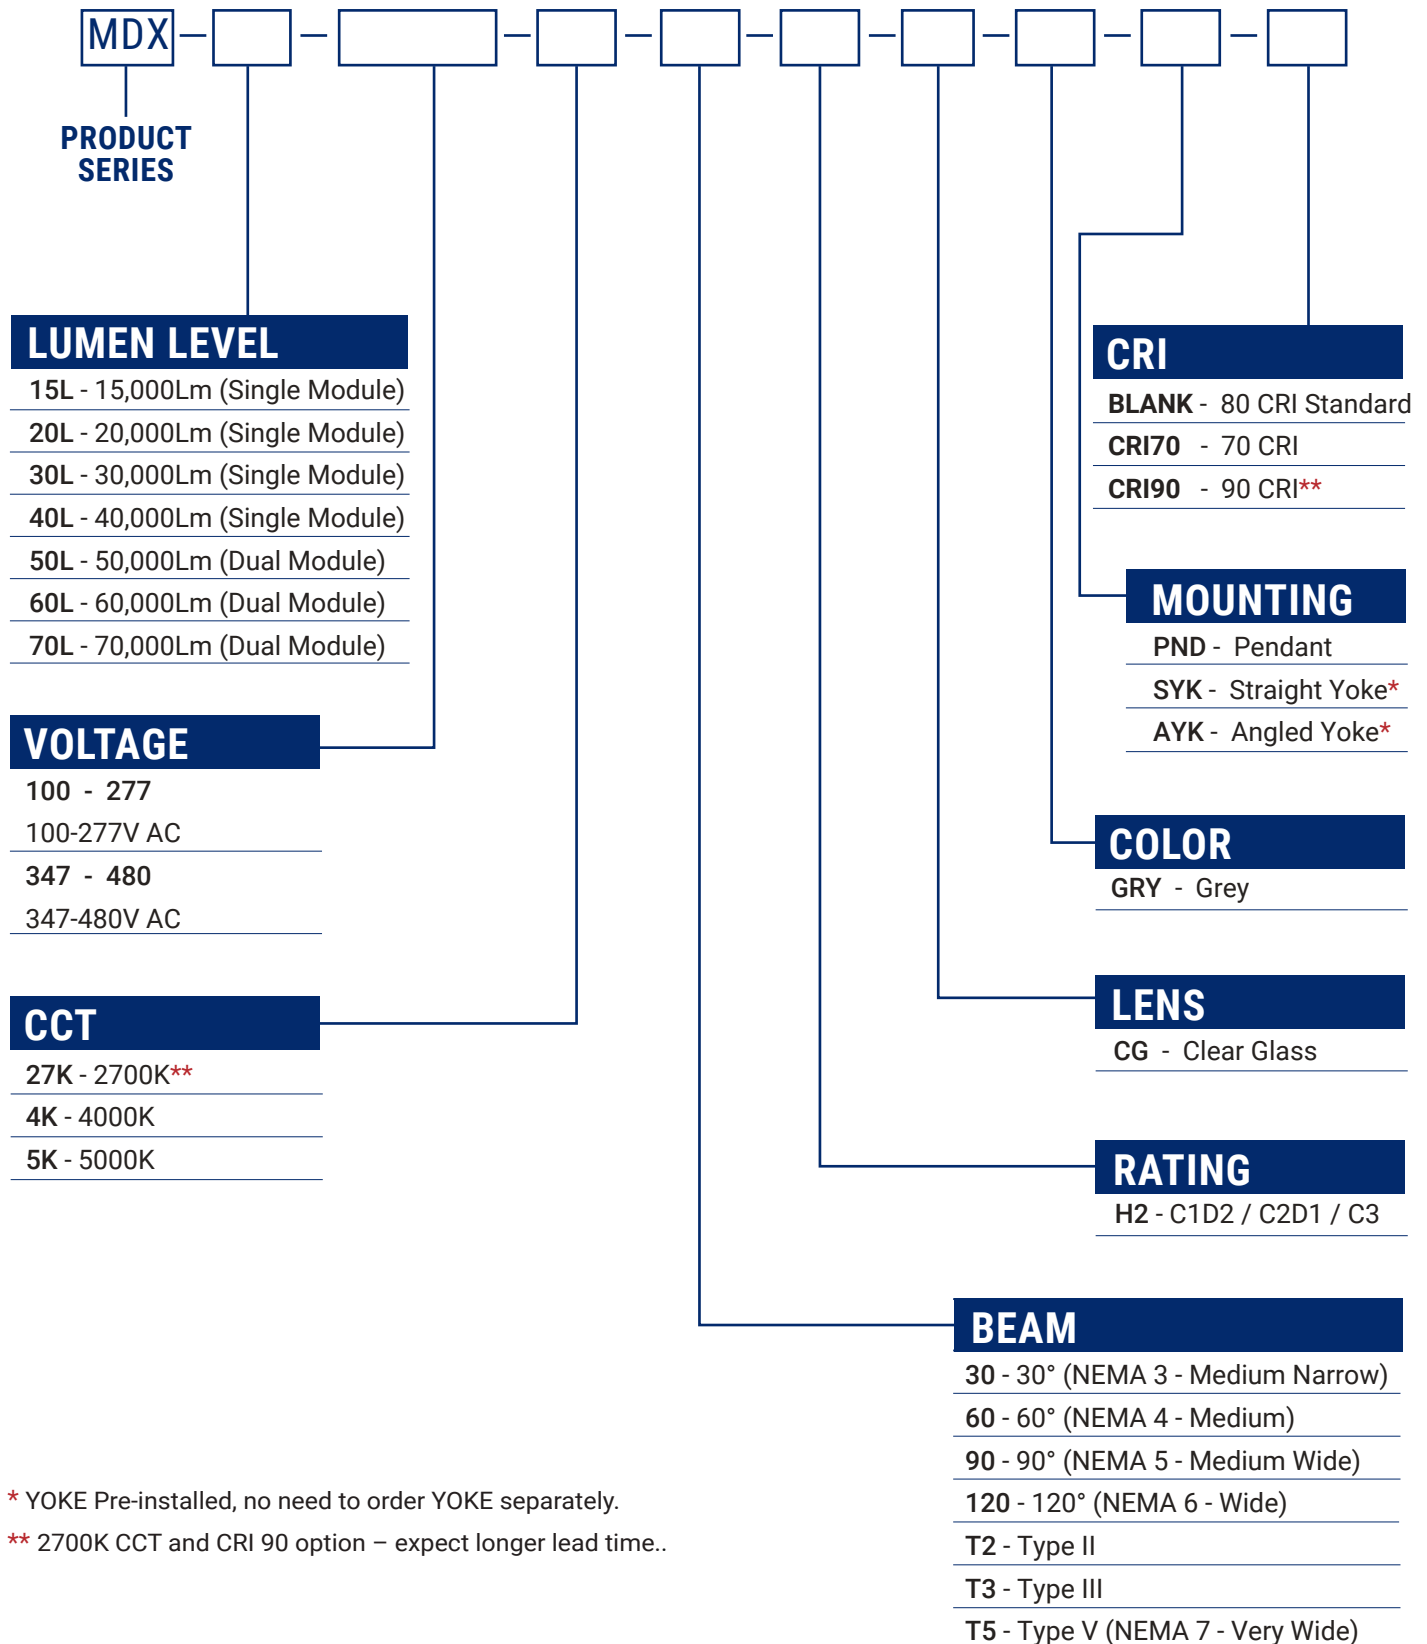


* YOKE Pre-installed, no need to order YOKE separately.

** 2700K CCT and CRI 90 option – expect longer lead time..

MOUNTING ACCESSORIES




Pendant



Straight Yoke




Angled Yoke



Chain




Stanchion




MDX-S YOKE S
MDX-S YOKE D



MDX-A YOKE S
MDX-A YOKE D



CHAIN02



STAN01
STAN02

Mounting Method	PN	Description	MPN Code
Straight Yoke	MDX-S YOKE S	Straight Yoke, 0-90 Degrees Adjustable, SUS304, Powder-Coated Grey RAL 7037, only available with 15L/20L/30L/40L	309050348
	MDX-S YOKE D	Straight Yoke, 0-90 Degrees Adjustable, SUS304, Powder-Coated Grey RAL 7037, only available with 50L/60L/70L	309050350
Angled Yoke	MDX-A YOKE S	45-Degree Angled Yoke, 0-90 Degrees Adjustable, SUS304, Powder-Coated Grey RAL 7037, only available with MDX 15L/20L/30L/40L	309050349
	MDX-A YOKE D	45-Degree Angled Yoke, 0-90 Degrees Adjustable, SUS304, Powder-Coated Grey RAL 7037, only available with 50L/60L/70L	309050351
Chain	CHAIN02	Chain Hang Kit, 4pcs×3ft, SUS304	309050358
Stanchion	STAN01*	Slip-Fit Stanchion Mount Kit for Φ 2 inch (2-3/8 inch OD, 60mm OD) Poles, Non-Threaded, SUS304, Powder-Coated Grey RAL 7037	309050300
	STAN02**	Slip-Fit Stanchion Mount Kit for Φ 2 inch (2 3/8 inch OD) Poles, Non-threaded, SUS304, Powder-Coated Grey RAL 7037	309050362


* Requires A Straight Yoke, only available with 15L/20L/30L/40L

** Requires A Straight Yoke, only available with 50L/60L/70L

OTHER ACCESSORIES



HOOK02



MDX-WG



SFCB01



MDX-VISO



DPY02

PN	Description	MPN Code
HOOK02	M10 Hook with 3/4 inch NPT Threads, SUS316	309050331
MDX-SWG	Wire Guard for Glass Lens	309050360
MDX-DWG	Wire Guard for Glass Lens, only available with 50L/60L/70L	309050361
SFCB01	3ft Safety Cable Kit, SUS304	106060018
MDX-VISO	Visor, AL6061, Powder-Coated Grey RAL 7037	309050359
GLCO-03	3 ft Cord (SOOW 14 AWG × 3, 105 degrees Celsius, 600V) with Cable Gland, for C1D2 and Non-Hazardous Only	204020003
GLCO-10	10 ft Cord (SOOW 14 AWG × 3, 105 degrees Celsius, 600V) with Cable Gland, for C1D2 and Non-Hazardous Only	204020004
DPY02***	Crane Damper Bracket, SUS304, Fixed with M12 Bolts	309050367

*** only available with MDX 15L/20L/30L/40L




CRANE DAMPER BRACKET



The **Damper bracket** is specifically engineered to support MDX series floodlights, effectively minimizing vibrations when installed on moving cranes. This bracket ensures that your luminaire remains directed downward, regardless of its position along the crane boom, providing consistent illumination over the intended target area.


APPLICATION

- Harbour cranes
- Gantry cranes
- Offshore/Marine cranes

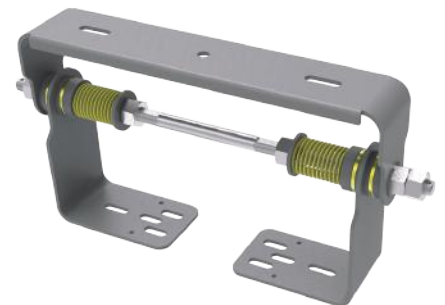

SLIP-FIT JUNCTION BOX

The **Junction Box** is a multi-piece assembly featuring a copper-free, cast-aluminum housing, front cover, and cable gland. The design accommodates both stanchion installation and other mounting options. It is compatible with 2" (2 3/8" OD) and 1.5" (1.9" OD) poles, both NPT-threaded and non-threaded.

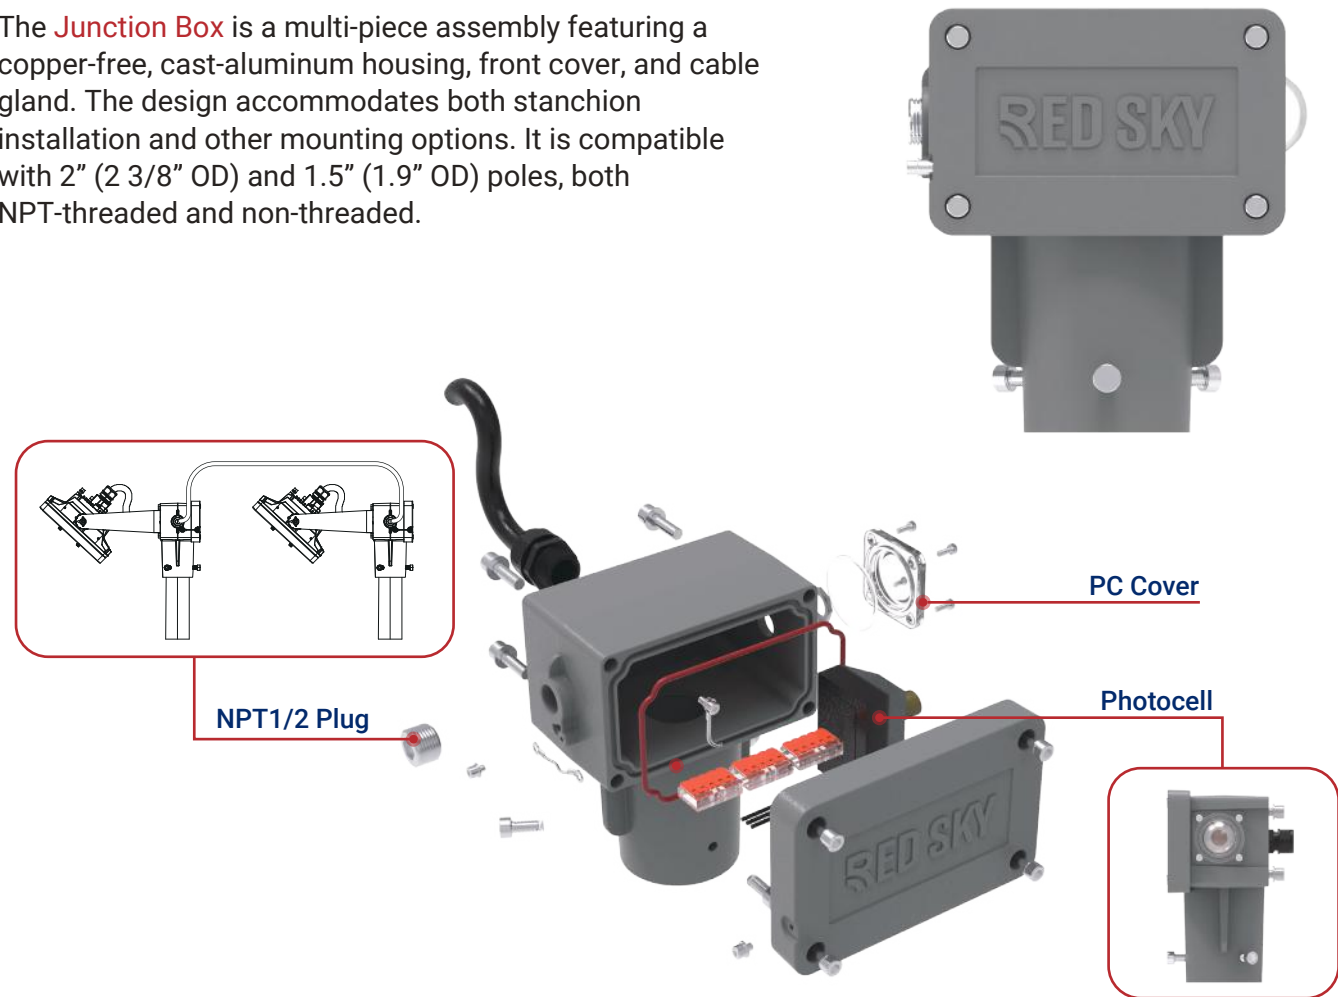

FEATURES


- Weather-resistant finish suitable for wet locations and marine environments
- WAGO 211 lever connectors (5-pole, UL/CSA, 20-10 AWG) for easy, hassle-free wiring
- Wiring access cover with captive screws and a rear hub featuring NPT 1/2" threads for daisy-chain wiring
- Optional C1D2 Photocell Sensor built-in
- Ambient temperature range: -45°C to +65°C (-49°F to 149°F)
- Shock and vibration-resistant design

CERTIFICATIONS & RATINGS

UL844
UL1598
UL1598A
CSA C22.2 NO. 250.0
CSA C22.2 No. 137
Class I Division 2, Groups A, B, C, D
UL 1598 Wet Locations
UL 1598A Marine Outside Type (Salt Water)
IP66
IK10
Salt Spray 720 hrs (ISO 9227)

SLIP-FIT JUNCTION BOX

INSTALLATION EXAMPLE

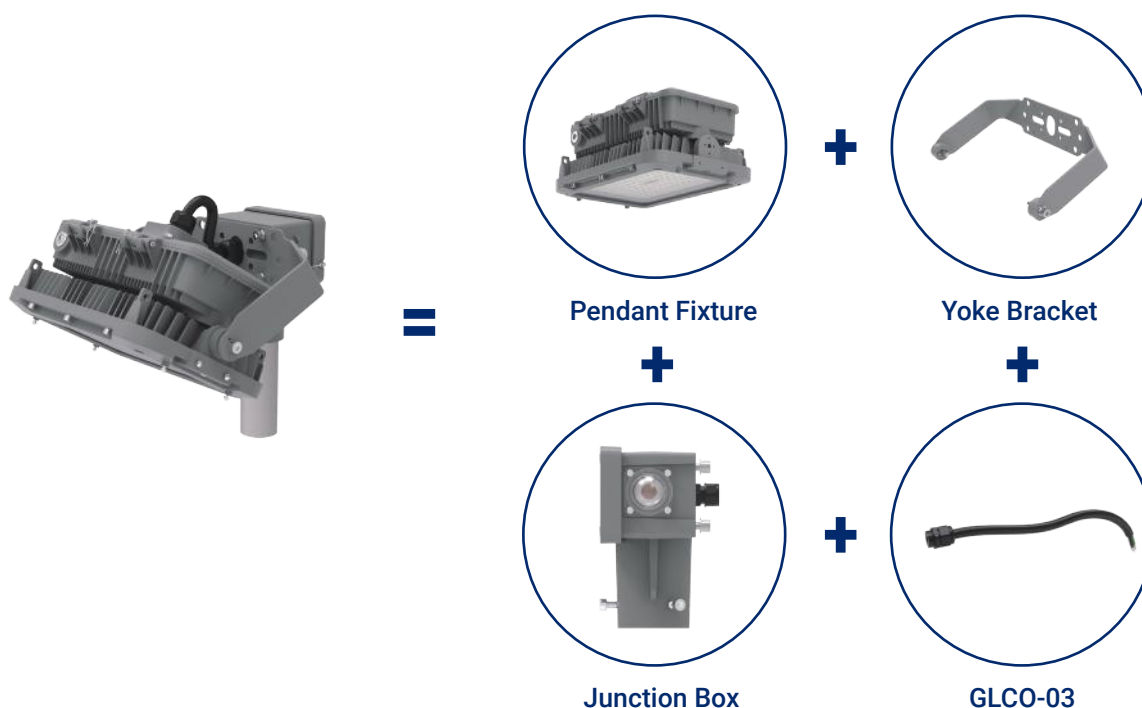

ORDERING INFORMATION

Part Number	Description	MPN Code
JB01	1.5" (1.9" OD) and 2"(2 3/8" OD) NPT-threaded Slip-Fit Junction box	309050379
JB02-P	1.5" (1.9" OD) and 2"(2 3/8" OD) NPT-threaded Slip-Fit Junction box + Sensor (120V)	309050380
JB03-P	1.5" (1.9" OD) and 2"(2 3/8" OD) NPT-threaded Slip-Fit Junction box + Sensor (208-277V)	309050381
JB04	1.5" (1.9" OD) and 2"(2 3/8" OD) Non-threaded Slip-Fit Junction box	309050382
JB05-P	1.5" (1.9" OD) and 2"(2 3/8" OD) Non-threaded Slip-Fit Junction box + Sensor (120V)	309050383
JB06-P	1.5" (1.9" OD) and 2"(2 3/8" OD) Non-threaded Slip-Fit Junction box + Sensor (208-277V)	309050384
MDX-A YOKE S	45°Angled YOKE, 0-90° adjustable, SUS304 powder coated, RAL7037, available only with 15L/20L/30L/40L	310010115
MDX-A YOKE D	45°Angled YOKE, 0-90° adjustable, SUS304 powder coated, RAL7037, available only with 50L/60L/70L	310010117
GLCO-03	3ft Cord (SOOW 14AWG*3, 105°C, 600V) with cable gland, for C1D2 and non-hazardous only	204020003

REPLACEMENT PARTS (ORDERED SEPARATELY)

Part Number	Description	MPN Code
MDX-15L-100-277-Driver	Replacement driver kit for MDX-15L-100-277 Fixtures	303010001
MDX-15L-347-480-Driver	Replacement driver kit for MDX-15L-347-480 Fixtures	303010002
MDX-20L-100-277-Driver	Replacement driver kit for MDX-20L-100-277 Fixtures	303010003
MDX-20L-347-480-Driver	Replacement driver kit for MDX-20L-347-480 Fixtures	303010004
MDX-30L-100-277-Driver	Replacement driver kit for MDX-30L-100-277 Fixtures	303010005
MDX-30L-347-480-Driver	Replacement driver kit for MDX-30L-347-480 Fixtures	303010006
MDX-40L-100-277-Driver	Replacement driver kit for MDX-40L-100-277 Fixtures	303010007
MDX-40L-347-480-Driver	Replacement driver kit for MDX-40L-347-480 Fixtures	303010008
MDX-50L-100-277-Driver	Replacement driver kit for MDX-50L-100-277 Fixtures	303010009
MDX-50L-347-480-Driver	Replacement driver kit for MDX-50L-347-480 Fixtures	303010010
MDX-60L-100-277-Driver	Replacement driver kit for MDX-60L-100-277 Fixtures	303010011
MDX-60L-347-480-Driver	Replacement driver kit for MDX-60L-347-480 Fixtures	303010012
MDX-70L-100-277-Driver	Replacement driver kit for MDX-70L-100-277 Fixtures	303010013
MDX-70L-347-480-Driver	Replacement driver kit for MDX-70L-347-480 Fixtures	303010014

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
Voltage 100-277VAC 80 CRI • STANDARD							
MDX-15L-100-277-5K-120-H2-CG-GRY-PND	90	5000K	80	120	Clear Glass	15,047	166
MDX-15L-100-277-5K-30-H2-CG-GRY-PND	90	5000K	80	30	Clear Glass	15,126	166
MDX-15L-100-277-5K-60-H2-CG-GRY-PND	90	5000K	80	60	Clear Glass	15,349	168
MDX-15L-100-277-5K-90-H2-CG-GRY-PND	90	5000K	80	90	Clear Glass	15,657	171
MDX-15L-100-277-5K-T2-H2-CG-GRY-PND	90	5000K	80	T2	Clear Glass	14,341	157
MDX-15L-100-277-5K-T3-H2-CG-GRY-PND	90	5000K	80	T3	Clear Glass	14,899	163
MDX-15L-100-277-5K-T5-H2-CG-GRY-PND	120	5000K	80	T5	Clear Glass	13,621	150
MDX-20L-100-277-5K-120-H2-CG-GRY-PND	120	5000K	80	120	Clear Glass	19,854	163
MDX-20L-100-277-5K-30-H2-CG-GRY-PND	120	5000K	80	30	Clear Glass	19,881	163
MDX-20L-100-277-5K-60-H2-CG-GRY-PND	120	5000K	80	60	Clear Glass	19,787	164
MDX-20L-100-277-5K-90-H2-CG-GRY-PND	120	5000K	80	90	Clear Glass	19,972	165
MDX-20L-100-277-5K-T2-H2-CG-GRY-PND	120	5000K	80	T2	Clear Glass	18,600	155
MDX-20L-100-277-5K-T3-H2-CG-GRY-PND	120	5000K	80	T3	Clear Glass	19,241	160
MDX-20L-100-277-5K-T5-H2-CG-GRY-PND	120	5000K	80	T5	Clear Glass	17,611	147
MDX-30L-100-277-5K-120-H2-CG-GRY-PND	190	5000K	80	120	Clear Glass	29,148	154
MDX-30L-100-277-5K-30-H2-CG-GRY-PND	190	5000K	80	30	Clear Glass	29,751	155
MDX-30L-100-277-5K-60-H2-CG-GRY-PND	190	5000K	80	60	Clear Glass	30,193	157
MDX-30L-100-277-5K-90-H2-CG-GRY-PND	190	5000K	80	90	Clear Glass	30,257	159
MDX-30L-100-277-5K-T2-H2-CG-GRY-PND	190	5000K	80	T2	Clear Glass	28,230	148
MDX-30L-100-277-5K-T3-H2-CG-GRY-PND	190	5000K	80	T3	Clear Glass	28,797	152
MDX-30L-100-277-5K-T5-H2-CG-GRY-PND	190	5000K	80	T5	Clear Glass	26,805	140
MDX-40L-100-277-5K-120-H2-CG-GRY-PND	260	5000K	80	120	Clear Glass	37,730	149
MDX-40L-100-277-5K-30-H2-CG-GRY-PND	260	5000K	80	30	Clear Glass	38,649	152
MDX-40L-100-277-5K-60-H2-CG-GRY-PND	260	5000K	80	60	Clear Glass	38,575	152
MDX-40L-100-277-5K-90-H2-CG-GRY-PND	260	5000K	80	90	Clear Glass	38,572	152
MDX-40L-100-277-5K-T2-H2-CG-GRY-PND	260	5000K	80	T2	Clear Glass	35,838	141
MDX-40L-100-277-5K-T3-H2-CG-GRY-PND	260	5000K	80	T3	Clear Glass	36,960	146
MDX-40L-100-277-5K-T5-H2-CG-GRY-PND	260	5000K	80	T5	Clear Glass	34,220	135
MDX-50L-100-277-5K-120-H2-CG-GRY-PND	310	5000K	80	120	Clear Glass	47,974	155
MDX-50L-100-277-5K-30-H2-CG-GRY-PND	310	5000K	80	30	Clear Glass	51,920	169
MDX-50L-100-277-5K-60-H2-CG-GRY-PND	310	5000K	80	60	Clear Glass	49,168	160
MDX-50L-100-277-5K-90-H2-CG-GRY-PND	310	5000K	80	90	Clear Glass	49,073	160
MDX-50L-100-277-5K-T2-H2-CG-GRY-PND	310	5000K	80	T2	Clear Glass	45,610	169
MDX-50L-100-277-5K-T3-H2-CG-GRY-PND	310	5000K	80	T3	Clear Glass	47,983	156
MDX-50L-100-277-5K-T5-H2-CG-GRY-PND	310	5000K	80	T5	Clear Glass	43,799	143
MDX-60L-100-277-5K-120-H2-CG-GRY-PND	380	5000K	80	120	Clear Glass	59,028	155
MDX-60L-100-277-5K-30-H2-CG-GRY-PND	380	5000K	80	30	Clear Glass	60,719	160
MDX-60L-100-277-5K-60-H2-CG-GRY-PND	380	5000K	80	60	Clear Glass	60,995	160
MDX-60L-100-277-5K-90-H2-CG-GRY-PND	380	5000K	80	90	Clear Glass	61,510	161
MDX-60L-100-277-5K-T2-H2-CG-GRY-PND	380	5000K	80	T2	Clear Glass	56,202	147
MDX-60L-100-277-5K-T3-H2-CG-GRY-PND	380	5000K	80	T3	Clear Glass	58,570	153
MDX-60L-100-277-5K-T5-H2-CG-GRY-PND	380	5000K	80	T5	Clear Glass	54,246	143
MDX-70L-100-277-5K-120-H2-CG-GRY-PND	440	5000K	80	120	Clear Glass	66,313	151
MDX-70L-100-277-5K-30-H2-CG-GRY-PND	440	5000K	80	30	Clear Glass	68,251	156
MDX-70L-100-277-5K-60-H2-CG-GRY-PND	440	5000K	80	60	Clear Glass	68,952	152
MDX-70L-100-277-5K-90-H2-CG-GRY-PND	440	5000K	80	90	Clear Glass	69,079	157
MDX-70L-100-277-5K-T2-H2-CG-GRY-PND	440	5000K	80	T2	Clear Glass	64,066	146
MDX-70L-100-277-5K-T3-H2-CG-GRY-PND	440	5000K	80	T3	Clear Glass	65,733	148
MDX-70L-100-277-5K-T5-H2-CG-GRY-PND	440	5000K	80	T5	Clear Glass	62,020	140

347–480Vac models deliver the same lumen output as the 100–277Vac models.

This table only lists part of the model lumen parameters, if you need other model parameters, please contact our sales.

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
Voltage 100-277VAC 70 CRI							
MDX-15L-100-277-5K-120-H2-CG-GRY-PND CRI70	90	5000K	80	120	Clear Glass	15,965	175
MDX-15L-100-277-5K-30-H2-CG-GRY-PND CRI70	90	5000K	80	30	Clear Glass	16,079	176
MDX-15L-100-277-5K-60-H2-CG-GRY-PND CRI70	90	5000K	80	60	Clear Glass	16,124	177
MDX-15L-100-277-5K-90-H2-CG-GRY-PND CRI70	90	5000K	80	90	Clear Glass	16,467	180
MDX-15L-100-277-5K-T2-H2-CG-GRY-PND CRI70	90	5000K	80	T2	Clear Glass	15,000	165
MDX-15L-100-277-5K-T3-H2-CG-GRY-PND CRI70	90	5000K	80	T3	Clear Glass	15,707	172
MDX-15L-100-277-5K-T5-H2-CG-GRY-PND CRI70	120	5000K	80	T5	Clear Glass	14,384	157
MDX-20L-100-277-5K-120-H2-CG-GRY-PND CRI70	120	5000K	80	120	Clear Glass	20,460	173
MDX-20L-100-277-5K-30-H2-CG-GRY-PND CRI70	120	5000K	80	30	Clear Glass	20,632	174
MDX-20L-100-277-5K-60-H2-CG-GRY-PND CRI70	120	5000K	80	60	Clear Glass	20,585	174
MDX-20L-100-277-5K-90-H2-CG-GRY-PND CRI70	120	5000K	80	90	Clear Glass	21,037	177
MDX-20L-100-277-5K-T2-H2-CG-GRY-PND CRI70	120	5000K	80	T2	Clear Glass	19,149	161
MDX-20L-100-277-5K-T3-H2-CG-GRY-PND CRI70	120	5000K	80	T3	Clear Glass	20,021	169
MDX-20L-100-277-5K-T5-H2-CG-GRY-PND CRI70	120	5000K	80	T5	Clear Glass	18,244	154
MDX-30L-100-277-5K-120-H2-CG-GRY-PND CRI70	190	5000K	80	120	Clear Glass	31,305	165
MDX-30L-100-277-5K-30-H2-CG-GRY-PND CRI70	190	5000K	80	30	Clear Glass	31,463	166
MDX-30L-100-277-5K-60-H2-CG-GRY-PND CRI70	190	5000K	80	60	Clear Glass	31,586	166
MDX-30L-100-277-5K-90-H2-CG-GRY-PND CRI70	190	5000K	80	90	Clear Glass	32,082	169
MDX-30L-100-277-5K-T2-H2-CG-GRY-PND CRI70	190	5000K	80	T2	Clear Glass	29,275	154
MDX-30L-100-277-5K-T3-H2-CG-GRY-PND CRI70	190	5000K	80	T3	Clear Glass	30,617	161
MDX-30L-100-277-5K-T5-H2-CG-GRY-PND CRI70	190	5000K	80	T5	Clear Glass	27,970	147
MDX-40L-100-277-5K-120-H2-CG-GRY-PND CRI70	260	5000K	80	120	Clear Glass	39,864	159
MDX-40L-100-277-5K-30-H2-CG-GRY-PND CRI70	260	5000K	80	30	Clear Glass	39,904	159
MDX-40L-100-277-5K-60-H2-CG-GRY-PND CRI70	260	5000K	80	60	Clear Glass	40,085	160
MDX-40L-100-277-5K-90-H2-CG-GRY-PND CRI70	260	5000K	80	90	Clear Glass	40,632	162
MDX-40L-100-277-5K-T2-H2-CG-GRY-PND CRI70	260	5000K	80	T2	Clear Glass	38,008	147
MDX-40L-100-277-5K-T3-H2-CG-GRY-PND CRI70	260	5000K	80	T3	Clear Glass	39,521	153
MDX-40L-100-277-5K-T5-H2-CG-GRY-PND CRI70	260	5000K	80	T5	Clear Glass	36,295	141
MDX-50L-100-277-5K-120-H2-CG-GRY-PND CRI70	310	5000K	80	120	Clear Glass	49,486	173
MDX-50L-100-277-5K-30-H2-CG-GRY-PND CRI70	310	5000K	80	30	Clear Glass	50,142	176
MDX-50L-100-277-5K-60-H2-CG-GRY-PND CRI70	310	5000K	80	60	Clear Glass	49,712	174
MDX-50L-100-277-5K-90-H2-CG-GRY-PND CRI70	310	5000K	80	90	Clear Glass	50,554	177
MDX-50L-100-277-5K-T2-H2-CG-GRY-PND CRI70	310	5000K	80	T2	Clear Glass	46,072	162
MDX-50L-100-277-5K-T3-H2-CG-GRY-PND CRI70	310	5000K	80	T3	Clear Glass	48,348	170
MDX-50L-100-277-5K-T5-H2-CG-GRY-PND CRI70	310	5000K	80	T5	Clear Glass	44,020	154
MDX-60L-100-277-5K-120-H2-CG-GRY-PND CRI70	380	5000K	80	120	Clear Glass	60,933	172
MDX-60L-100-277-5K-30-H2-CG-GRY-PND CRI70	380	5000K	80	30	Clear Glass	62,368	176
MDX-60L-100-277-5K-60-H2-CG-GRY-PND CRI70	380	5000K	80	60	Clear Glass	61,877	176
MDX-60L-100-277-5K-90-H2-CG-GRY-PND CRI70	380	5000K	80	90	Clear Glass	62,902	179
MDX-60L-100-277-5K-T2-H2-CG-GRY-PND CRI70	380	5000K	80	T2	Clear Glass	56,637	161
MDX-60L-100-277-5K-T3-H2-CG-GRY-PND CRI70	380	5000K	80	T3	Clear Glass	59,504	169
MDX-60L-100-277-5K-T5-H2-CG-GRY-PND CRI70	380	5000K	80	T5	Clear Glass	54,596	155
MDX-70L-100-277-5K-120-H2-CG-GRY-PND CRI70	440	5000K	80	120	Clear Glass	69,987	170
MDX-70L-100-277-5K-30-H2-CG-GRY-PND CRI70	440	5000K	80	30	Clear Glass	71,035	172
MDX-70L-100-277-5K-60-H2-CG-GRY-PND CRI70	440	5000K	80	60	Clear Glass	70,889	172
MDX-70L-100-277-5K-90-H2-CG-GRY-PND CRI70	440	5000K	80	90	Clear Glass	72,190	175
MDX-70L-100-277-5K-T2-H2-CG-GRY-PND CRI70	440	5000K	80	T2	Clear Glass	65,473	159
MDX-70L-100-277-5K-T3-H2-CG-GRY-PND CRI70	440	5000K	80	T3	Clear Glass	68,076	165
MDX-70L-100-277-5K-T5-H2-CG-GRY-PND CRI70	440	5000K	80	T5	Clear Glass	62,659	152

347–480Vac models deliver the same lumen output as the 100–277Vac models.

This table only lists part of the model lumen parameters, if you need other model parameters, please contact our sales.

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
Voltage 100-277VAC 90 CRI							
MDX-15L-100-277-5K-120-H2-CG-GRY-PND CRI90	90	5000K	80	120	Clear Glass	12,341	135
MDX-15L-100-277-5K-30-H2-CG-GRY-PND CRI90	90	5000K	80	30	Clear Glass	12,429	136
MDX-15L-100-277-5K-60-H2-CG-GRY-PND CRI90	90	5000K	80	60	Clear Glass	12,464	137
MDX-15L-100-277-5K-90-H2-CG-GRY-PND CRI90	90	5000K	80	90	Clear Glass	12,729	139
MDX-15L-100-277-5K-T2-H2-CG-GRY-PND CRI90	90	5000K	80	T2	Clear Glass	11,595	127
MDX-15L-100-277-5K-T3-H2-CG-GRY-PND CRI90	90	5000K	80	T3	Clear Glass	12,141	133
MDX-15L-100-277-5K-T5-H2-CG-GRY-PND CRI90	120	5000K	80	T5	Clear Glass	11,119	122
MDX-20L-100-277-5K-120-H2-CG-GRY-PND CRI90	120	5000K	80	120	Clear Glass	15,815	134
MDX-20L-100-277-5K-30-H2-CG-GRY-PND CRI90	120	5000K	80	30	Clear Glass	15,948	134
MDX-20L-100-277-5K-60-H2-CG-GRY-PND CRI90	120	5000K	80	60	Clear Glass	15,912	134
MDX-20L-100-277-5K-90-H2-CG-GRY-PND CRI90	120	5000K	80	90	Clear Glass	16,261	137
MDX-20L-100-277-5K-T2-H2-CG-GRY-PND CRI90	120	5000K	80	T2	Clear Glass	14,802	125
MDX-20L-100-277-5K-T3-H2-CG-GRY-PND CRI90	120	5000K	80	T3	Clear Glass	15,476	130
MDX-20L-100-277-5K-T5-H2-CG-GRY-PND CRI90	120	5000K	80	T5	Clear Glass	14,103	119
MDX-30L-100-277-5K-120-H2-CG-GRY-PND CRI90	190	5000K	80	120	Clear Glass	24,199	127
MDX-30L-100-277-5K-30-H2-CG-GRY-PND CRI90	190	5000K	80	30	Clear Glass	24,321	128
MDX-30L-100-277-5K-60-H2-CG-GRY-PND CRI90	190	5000K	80	60	Clear Glass	24,416	128
MDX-30L-100-277-5K-90-H2-CG-GRY-PND CRI90	190	5000K	80	90	Clear Glass	24,800	130
MDX-30L-100-277-5K-T2-H2-CG-GRY-PND CRI90	190	5000K	80	T2	Clear Glass	22,630	119
MDX-30L-100-277-5K-T3-H2-CG-GRY-PND CRI90	190	5000K	80	T3	Clear Glass	23,667	124
MDX-30L-100-277-5K-T5-H2-CG-GRY-PND CRI90	190	5000K	80	T5	Clear Glass	21,621	114
MDX-40L-100-277-5K-120-H2-CG-GRY-PND CRI90	260	5000K	80	120	Clear Glass	30,815	123
MDX-40L-100-277-5K-30-H2-CG-GRY-PND CRI90	260	5000K	80	30	Clear Glass	30,846	123
MDX-40L-100-277-5K-60-H2-CG-GRY-PND CRI90	260	5000K	80	60	Clear Glass	30,985	123
MDX-40L-100-277-5K-90-H2-CG-GRY-PND CRI90	260	5000K	80	90	Clear Glass	31,408	125
MDX-40L-100-277-5K-T2-H2-CG-GRY-PND CRI90	260	5000K	80	T2	Clear Glass	29,380	114
MDX-40L-100-277-5K-T3-H2-CG-GRY-PND CRI90	260	5000K	80	T3	Clear Glass	30,550	119
MDX-40L-100-277-5K-T5-H2-CG-GRY-PND CRI90	260	5000K	80	T5	Clear Glass	28,056	109
MDX-50L-100-277-5K-120-H2-CG-GRY-PND CRI90	310	5000K	80	120	Clear Glass	38,252	134
MDX-50L-100-277-5K-30-H2-CG-GRY-PND CRI90	310	5000K	80	30	Clear Glass	38,760	136
MDX-50L-100-277-5K-60-H2-CG-GRY-PND CRI90	310	5000K	80	60	Clear Glass	38,427	135
MDX-50L-100-277-5K-90-H2-CG-GRY-PND CRI90	310	5000K	80	90	Clear Glass	39,078	137
MDX-50L-100-277-5K-T2-H2-CG-GRY-PND CRI90	310	5000K	80	T2	Clear Glass	35,614	125
MDX-50L-100-277-5K-T3-H2-CG-GRY-PND CRI90	310	5000K	80	T3	Clear Glass	37,373	131
MDX-50L-100-277-5K-T5-H2-CG-GRY-PND CRI90	310	5000K	80	T5	Clear Glass	34,028	119
MDX-60L-100-277-5K-120-H2-CG-GRY-PND CRI90	380	5000K	80	120	Clear Glass	47,101	133
MDX-60L-100-277-5K-30-H2-CG-GRY-PND CRI90	380	5000K	80	30	Clear Glass	48,210	136
MDX-60L-100-277-5K-60-H2-CG-GRY-PND CRI90	380	5000K	80	60	Clear Glass	47,831	136
MDX-60L-100-277-5K-90-H2-CG-GRY-PND CRI90	380	5000K	80	90	Clear Glass	48,623	138
MDX-60L-100-277-5K-T2-H2-CG-GRY-PND CRI90	380	5000K	80	T2	Clear Glass	43,780	124
MDX-60L-100-277-5K-T3-H2-CG-GRY-PND CRI90	380	5000K	80	T3	Clear Glass	45,997	131
MDX-60L-100-277-5K-T5-H2-CG-GRY-PND CRI90	380	5000K	80	T5	Clear Glass	42,203	120
MDX-70L-100-277-5K-120-H2-CG-GRY-PND CRI90	440	5000K	80	120	Clear Glass	54,100	131
MDX-70L-100-277-5K-30-H2-CG-GRY-PND CRI90	440	5000K	80	30	Clear Glass	54,910	133
MDX-70L-100-277-5K-60-H2-CG-GRY-PND CRI90	440	5000K	80	60	Clear Glass	54,797	133
MDX-70L-100-277-5K-90-H2-CG-GRY-PND CRI90	440	5000K	80	90	Clear Glass	55,803	135
MDX-70L-100-277-5K-T2-H2-CG-GRY-PND CRI90	440	5000K	80	T2	Clear Glass	50,611	123
MDX-70L-100-277-5K-T3-H2-CG-GRY-PND CRI90	440	5000K	80	T3	Clear Glass	52,623	128
MDX-70L-100-277-5K-T5-H2-CG-GRY-PND CRI90	440	5000K	80	T5	Clear Glass	48,435	117

347–480Vac models deliver the same lumen output as the 100–277Vac models.

This table only lists part of the model lumen parameters, if you need other model parameters, please contact our sales.

A DIRECT RETROFIT FROM HID TO LED

The MDX series LED is easy to retrofit in the same configuration as your existing HID luminaires. For example, a 90-watt Modular Max Floodlight (MDX-15L) delivers virtually the same illumination as its equivalent 400 watt HPS luminaire while providing 80% reduction in energy costs and up to 230,000 hours of continuous operation.


MODELS	Lumen Output (Lm)	MH Equivalent (W)	HPS Equivalent (W)
MDX-15L	15,074	350	400
MDX-20L	19,854	450	
MDX-30L	29,148	750	
MDX-40L	37,009	1000	750
MDX-50L	47,974	1000~1500	1000
MDX-60L	59,028		N.A
MDX-70L	66,313		

THE RIGHT BEAM PATTERN FOR YOUR APPLICATION

RSL optic package is engineered to deliver maximum footcandles efficiently where you need them, without wasted light or overspill.


RSL offers complimentary lighting design services for our products using industry-leading AGI32 software, tailored for projects of all sizes in harsh and hazardous locations. We assist you in determining the number of fixtures needed, the types of lights to use, their optimal placement, and how to maximize energy savings—all within budget.

Simply fill out the form (<https://dev.redskylighting.com/lighting-design>) with a few key details, request a layout, and we'll bring your ideas to life within 2-5 business days.


Beam	NEMA/IESNA Type	Beam Description	Beam Projection Distance
30°	NEMA 3	Medium Narrow	
60°	NEMA 4	Medium	
90°	NEMA 5	Medium Wide	
120°	NEMA 6	Wide	
T1	Type I	Asymmetric distributions, well suited for narrow areas, such as Conveyor belts, Aisleways, Catwalks, Loading docks and Tunnels.	
T2	Type II	Asymmetric distributions, well suited for narrow areas, such as roadways, paths and driveways.	
T3	Type III	Asymmetric distributions, well suited for site / area perimeters, wide roadways, and open areas.	
T5	NEMA 7 Type V (Square)	Very Wide: symmetrical pattern with excellent uniformity for large, open areas.	

DIMENSIONS

unit: in(mm)

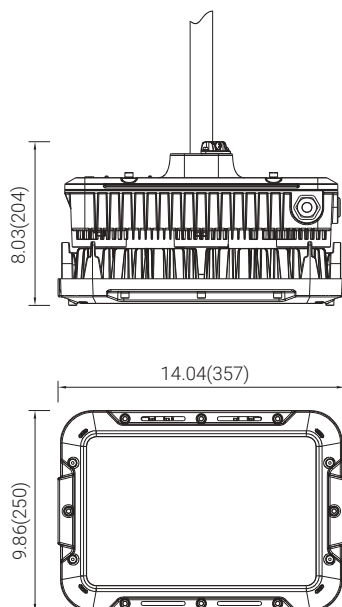


For 15L/20L/30L/40L

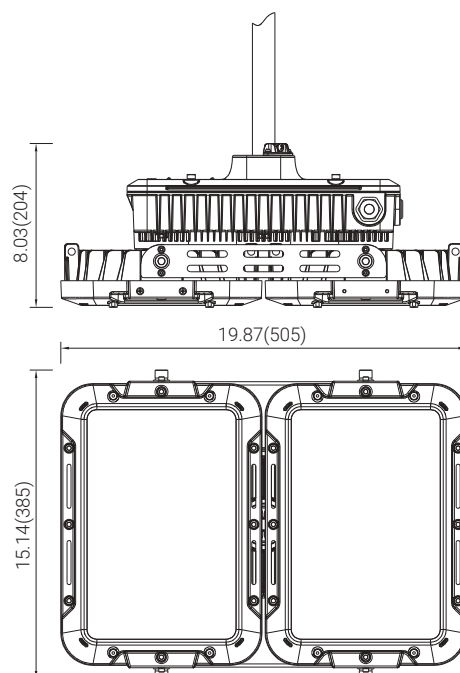


For 50L/60L/70L


Pendant

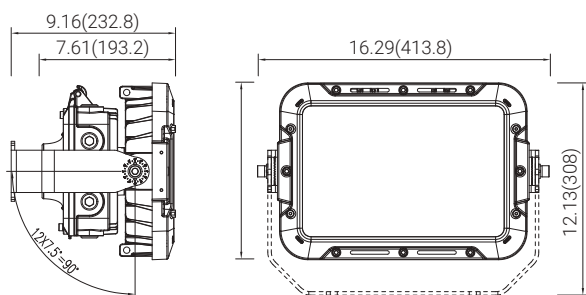

For 15L/20L/30L/40L

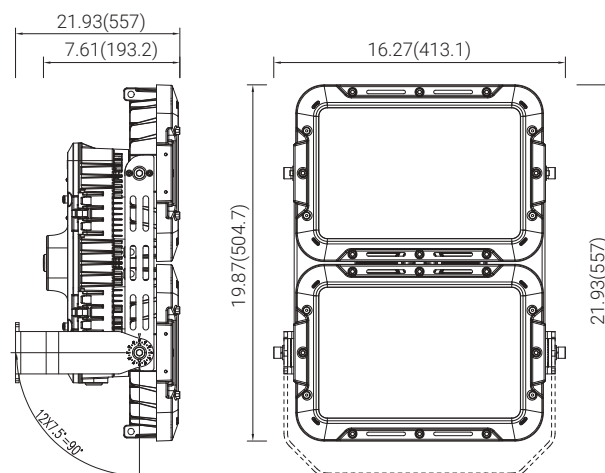


For 50L/60L/70L

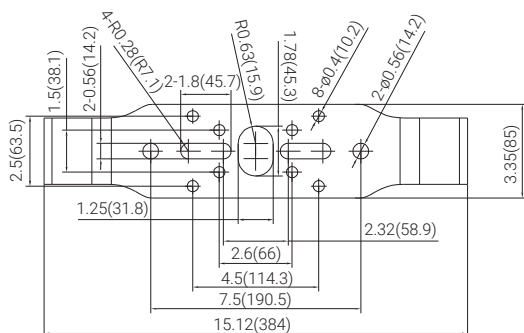


Straight Yoke

DIMENSIONS


unit: in(mm)

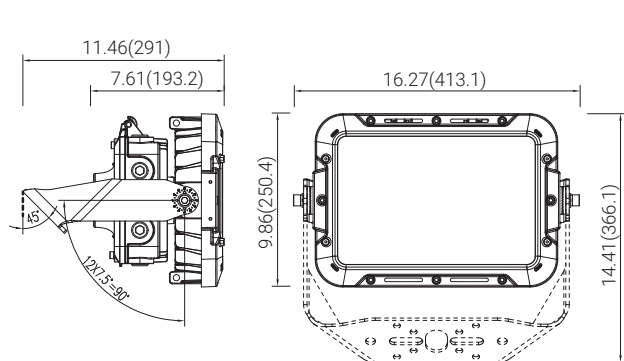


For 15L/20L/30L/40L

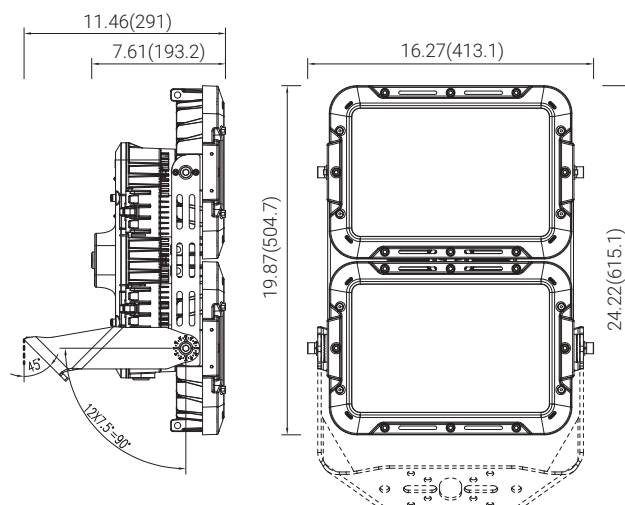

For 50L/60L/70L

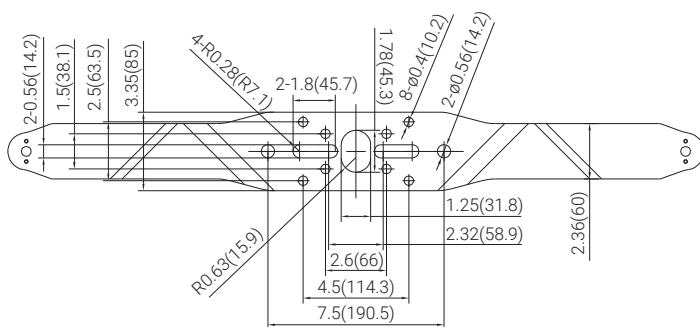



Angled Yoke

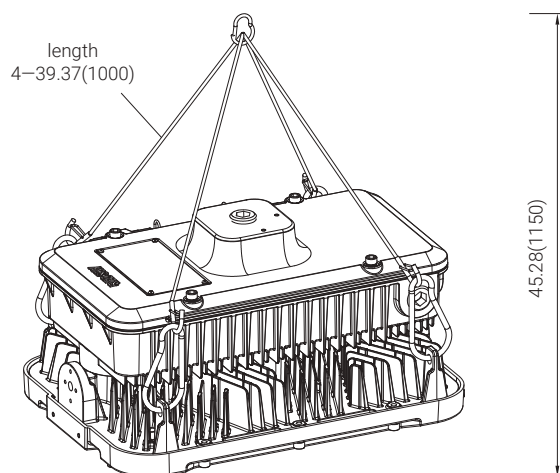




Chain

DIMENSIONS

unit: in(mm)

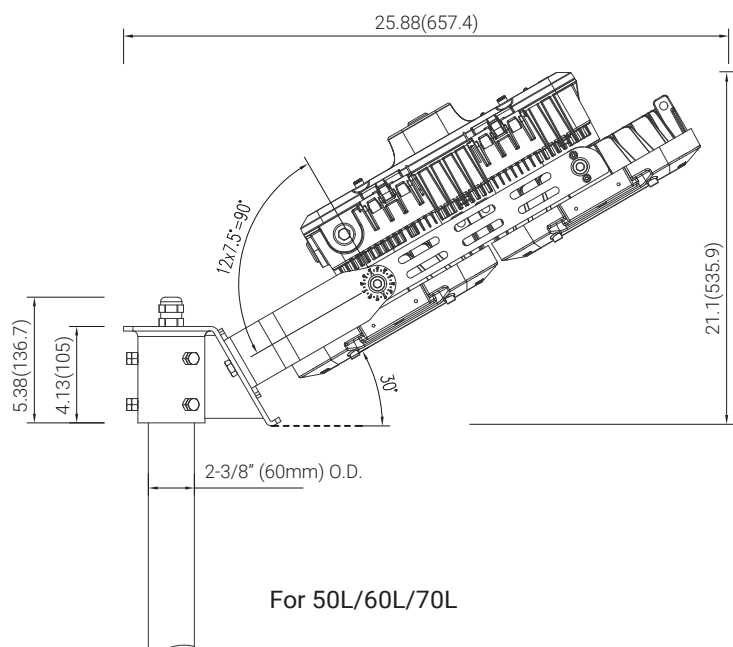
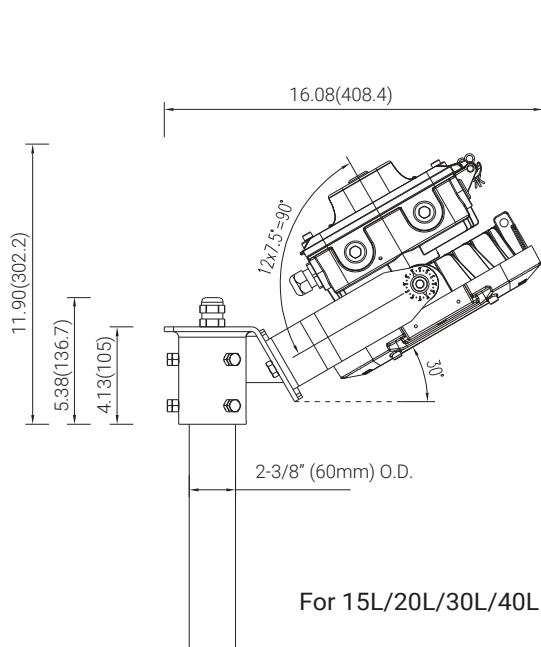


Stanchion

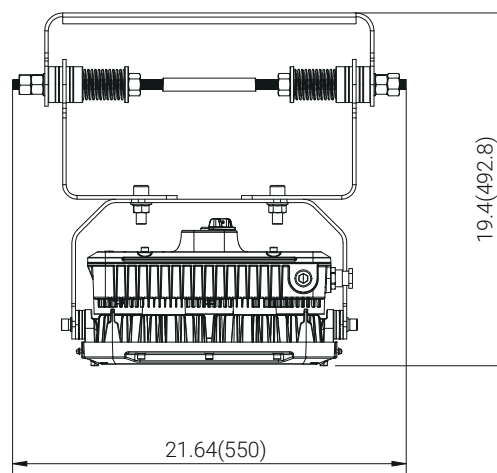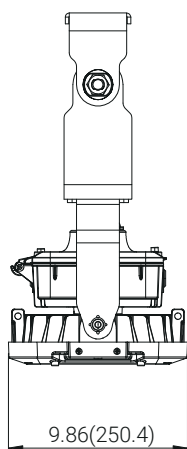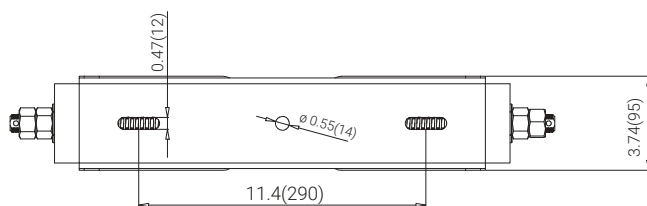

DPY02

unit: in(mm)

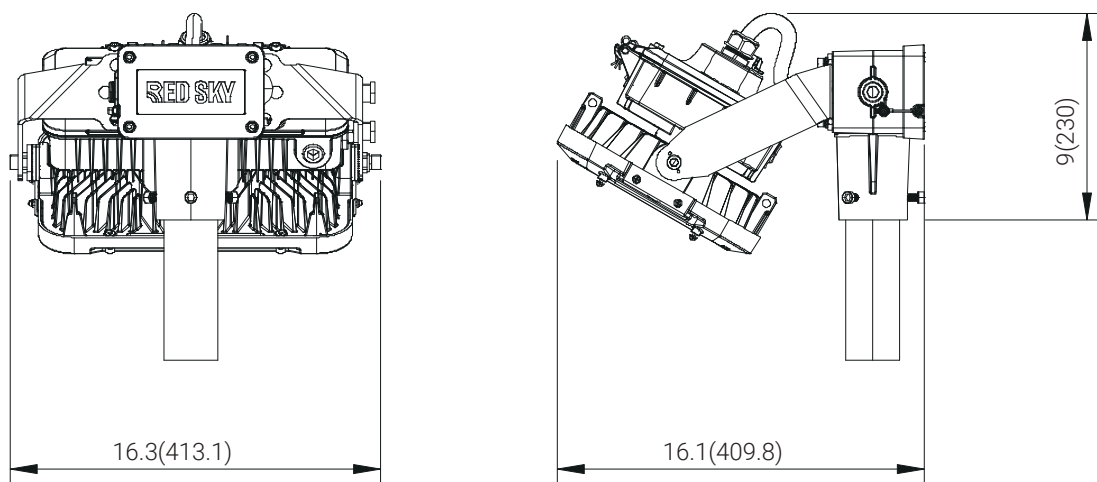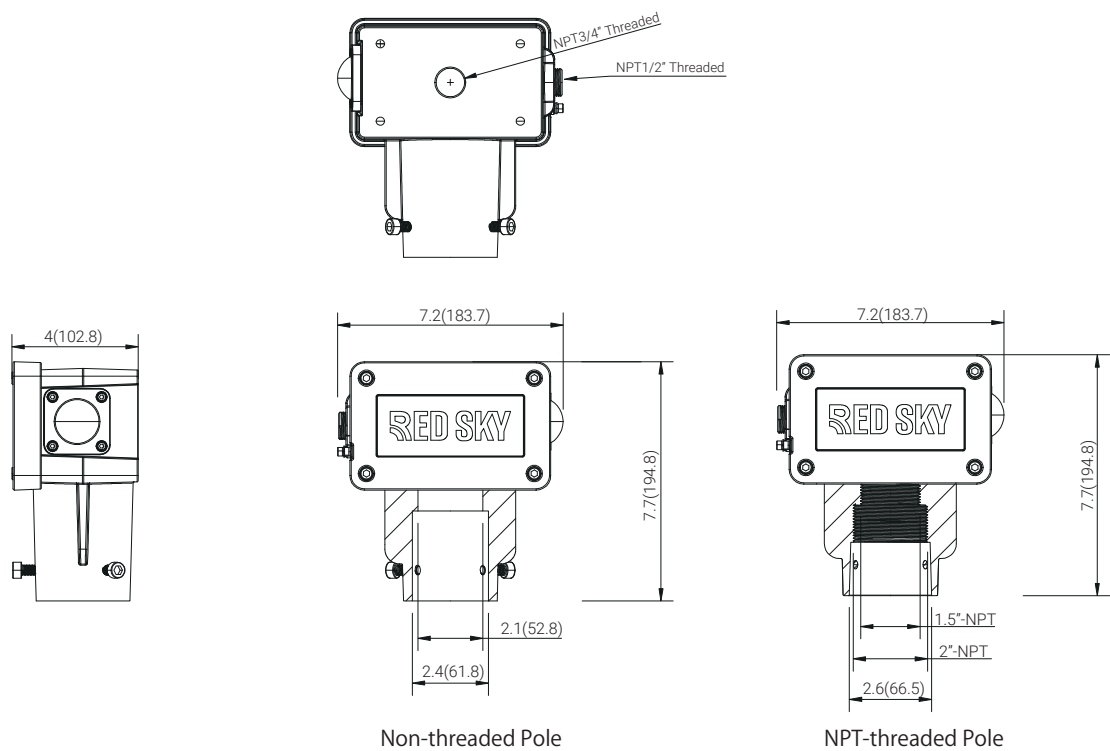

Slip-fit Junction Box

HAZARDOUS LOCATION LIGHTING BASICS

Atmosphere Groups

Temperature Classification

Substance	Hazard Class	Division Groups	Zone Groups	Max. Surface Temperatures	NEC® 500 CEC®	NEC® 500/IEC-Group II
Acetylene	Class I Flammable Gases	Group A	IIC	450°C(842°F)	T1	T1
Hydrogen		Group B	IIC	300°C(572°F)	T2	
Ethylene		Group C	IIB	280°C(536°F)	T2A	T2
Propane		Group D	IIA	260°C(500°F)	T2B	
Methane		Group D	IIA ²	230°C(446°F)	T2C	
Combustible Metal Dusts	Class II Combustible Dusts	Group E ¹	IIIC ³	215°C(419°F)	T2D	
Combustible Carbonaceous Dust		Group F	IIIB ³	200°C(392°F)	T3	T3
Combustible Dusts not in Group E or F (Flour, Grain, Wood, Plastics, Chemicals)		Group G	IIIB ³	180°C(256°F)	T3A	
				165°C(329°F)	T3B	
				160°C(320°F)	T3C	
Combustible Fibers and Flyings	Class III Fibers and Flyings	Not Applicable	IIIA ³	135°C(275°F)	T4	T4
Note 1: Group E is applicable to Class II, Division 1 only.				120°C(248°F)	T4A	
Note 2: Methane is a Group IIA Gas for non-mining applications.				100°C(212°F)	T5	T5
Note 3: Group IIIA, IIIB and IIIC have not been adopted by the Canadian Electrical Code.				85°C(185°F)	T6	T6

Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone 1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone 2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

IP Codes

1st No.	Solid Objects
0	No protection
1	Objects greater than 50mm
2	Objects greater than 12.5mm
3	Objects greater than 2.5mm
4	Objects greater than 1mm
5	Dust protected
6	Dust proof
2nd No.	Liquids
0	No protection
1	Vertically dripping
2	Dripping up to 15°
3	Limited spraying
4	Splashing from all directions
5	Hosing jets from all directions
6	Strong hosing jets from all directions
7	Temporary immersion
8	Continuous immersion
9	Steam-jet cleaning

IK Ratings

IK Code	Level of Protection Achieved
IK00	Not protected
IK01	Protected against 0.14 joules impact
IK02	Protected against 0.2 joules impact
IK03	Protected against 0.35 joules impact
IK04	Protected against 0.5 joules impact
IK05	Protected against 0.7 joules impact
IK06	Protected against 1 joules impact
IK07	Protected against 2 joules impact
IK08	Protected against 5 joules impact
IK09	Protected against 10 joules impact
IK10	Protected against 20 joules impact



+1 (262)456-5002
contact@redskylighting.com
www.redskylighting.com

RED SKY LIGHTING LLC
9370 Pittsburgh Ave
Rancho Cucamonga, CA 91730,
USA

Disclaimer

The product information provided is, to the best of Red Sky Lighting's knowledge, accurate as of the date of publication. However, purchasers and end-users of Red Sky Lighting's products should refer to the documentation available on www.redskylighting.com for the most up-to-date and controlling product specifications, installation manuals, sales terms and conditions, and warranty terms. To the extent any contract is formed for the sale of Red Sky Lighting's products, whether directly with Red Sky Lighting or through any third party, the versions of such documentation posted on www.redskylighting.com as of the date of sale shall govern and prevail over any inconsistent information that may be provided elsewhere. In the event of a conflict between the information contained in this document and that available on www.redskylighting.com, the website documentation shall control.