


LINEAR TUFF SERIES

LED LIGHTING FOR HAZARDOUS AREAS
AREA & LOWBAY



Reliable. Durable. Efficient.
4,200 to 12,000 lumen models

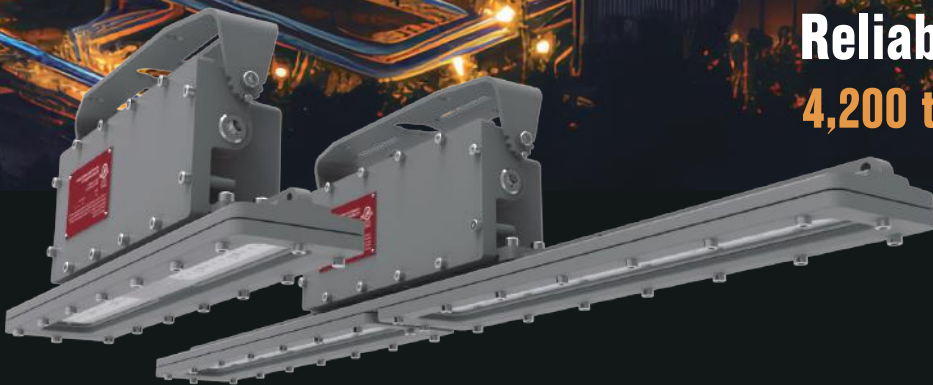


RED SKY
SERIOUSLY SAFE LIGHTS™

ABOUT RED SKY LIGHTING

PIONEERING INDUSTRIAL ILLUMINATION FOR HARSH & HAZARDOUS CONDITIONS

- A leading manufacturer of premium LED lights for demanding work conditions
- Headquartered in California, products assembled in the USA
- Servicing global clients across 4 continents in metal processing, oil & gas, marine, manufacturing
- Renowned for quality, dependability, client care and uncompromising safety standards

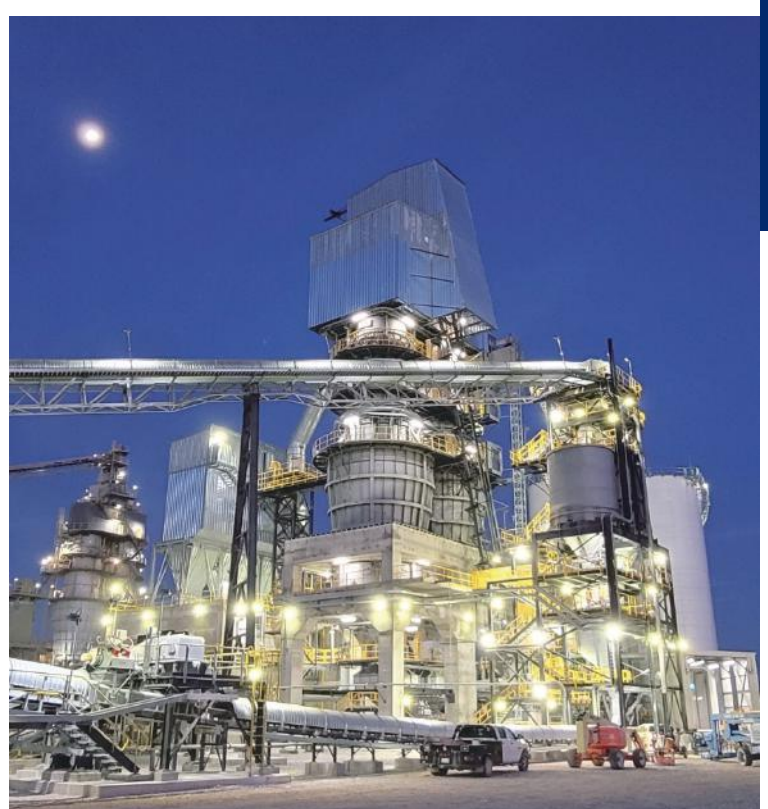

WHY CHOOSE RED SKY

SERIOUSLY SAFE LIGHTS

- Rigorously tested in our professional labs
- Surpassing industry certifications and safety protocols
- Crafted with highest grade components for maximum durability

TOP-NOTCH SERVICES

- Team of experts for seamless support
- Energy audit services, lighting simulation services
- Hassle-free return policy and management


FAST DELIVERY

- Majority of orders delivered within 14 days
- Same day shipping for products in stock
- Real-time order tracking for full transparency

SUSTAINABLE SOLUTIONS

- High luminous efficacy LEDs for energy savings
- Conscious product design
- Recyclable materials for products and packaging

LINEAR TUFF SERIES

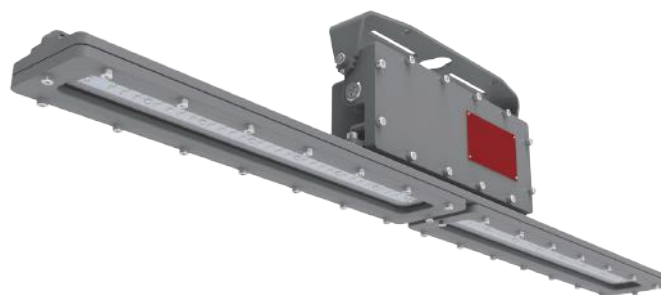

The Linear Tuff Series from Red Sky Lighting is a versatile linear LED fixture designed to withstand the most demanding industrial environments. Available in durable 2-foot and 4-foot lengths, it offers high luminous efficacy of up to 150 lumens per watt along with a new retrofit bracket for improved compatibility.


Built with a rugged copper-free aluminum body and frame, the Linear Tuff can handle extreme temperatures from -40°F (-40°C) to +140°F (60°C) along with vibration, water, and dust. Its optimized heat sink and thermal management system ensures safe and reliable heat dissipation for a long operational life, even in hazardous locations classified as Class 1 Division 1.

Requiring no maintenance, the Linear Tuff is ideal for low profile lighting applications in petrochemical facilities, oil rigs, mines, and other industrial sites. It offers an extended lifetime of over 147,000 hours at high ambient temperatures of 140°F (60°C). Energy efficient and durable, this LED fixture provides bright, economical illumination for use in the most unforgiving industrial environments. Backed by Red Sky Lighting's industry-leading 10-year warranty, the Linear Tuff Series provides exceptional performance, advanced safety, and unmatched durability for hazardous industrial environments.





FEATURES

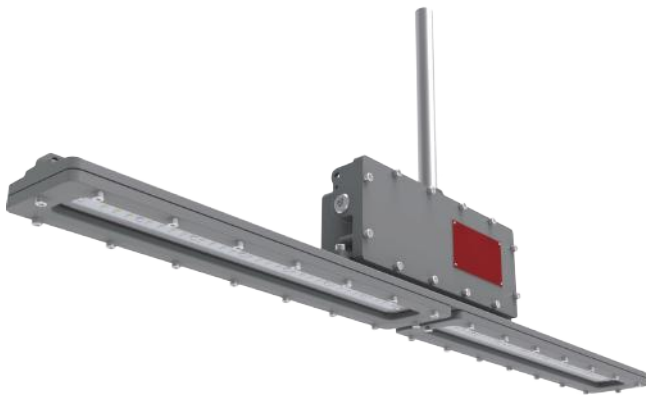

⚡ Rugged Construction

Heat sink designed to perform in high ambient temperatures up to +140°F and as low as -40°F.

Built to withstand extreme temperatures, vibration, water and dust.

Copper-free aluminum body and frame for corrosion resistant

⚡ Thermal Management

Safe and reliable heat transfer - Offering a T-rating of T6 (CID1)

⚡ Long Fixture Life

L70 >147,000 Hours@140°F

Maintenance-free and safe operation

RATINGS

Class I Division 1, Groups C, D	UL 1598A Marine Outside Type
Class I Division 2, Groups A, B, C, D	(Salt Water)
Class I, Zone 1, Group IIB	IP66
UL 1598 Wet Locations	IK08
	Salt Spray 720 hrs (ISO 9227)

CERTIFICATIONS

UL844
 UL1598
 UL1598A
 CSA C22.2 NO. 250.0
 CSA C22.2 No. 137
 DLC Standard*
 FCC Part 15, Subpart B

* Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification.


TECHNICAL PARAMETERS

Specification	LNT2-30	LNT2-40	LNT2-60	LNT2-80
Electrical Parameters				
Power	30W	40W	60W	80W
Rated Input Current(100V AC)	0.277A	0.370A	0.555A	0.740A
Rated Input Current(277V AC)	0.120A	0.160A	0.240A	0.320A
Rated Input Current(347V AC)	0.096A	0.128A	0.192A	0.256A
Rated Input Current(480V AC)	0.069A	0.092A	0.138A	0.185A
Voltage/Frequency	100-277V AC, 347-480V AC 50/60Hz			
Power Factor	≥0.90			
THD	<20%			
L70	147,000 hrs@140°F			
Dimming	0-10V, Range 10-100%			
Surge Protection	6KV			
Supply Wire	12-18AWG , Rated 90°C			
Warranty	LEDs: 10 years, Driver: 7 years			
Optical Parameters				
Lumen Output*	4,245Lm	5,592Lm	8,972Lm	11,875Lm
Lumen Efficacy*	150Lm/W			
Available Beam Angle	60° /110° /T2			
Correlated Color Temperature (CCT)	3000K/4000K/5000K			
Color Rendering Index (CRI)	80 CRI			
Mechanical Parameters				
Housing Material	Copper-free (< 0.4%) aluminum			
Hardware	Stainless steel 316			
Lens Material	Tempered Glass			
Mounting Options	Pendant, Yoke, Chain, Pole			
Product Weight	16.3lbs/7.4kg		23.8lbs/10.8kg	
Package Weight	18.4lbs/8.4kg		25.9lbs/11.8kg	
Cable Entry	(3) 3/4" NPT			
Product Dimensions(L×W×H)	21.4×4.3×7.3in (544×108×185mm)		43.3×4.3×7.3in (1100×108×185mm)	
Package Dimensions(L×W×H)	23.6×6.3×10.3in (600×160×260mm)		45.7×6.7×9.9in (1160×170×250mm)	
Environmental Parameters				
Ambient Operating Temperature	-40°F ~ 140°F (-40°C ~ 60°C)			
T-Code Rating	C1D1 - T6, C1D2 - T4A			
EPA wind rating (FT2)	1.62(Yoke)		2.388(Yoke)	

* Value calculated based on 5000K,80 CRI and Clear PC ,varies to different spec.
70 CRI & 90 CRI optional, DLC available with 70 CRI only.

ORDERING INFORMATION

EXAMPLE: LNT2-40-120-277-5K-110-H1-CG-GRY-PND BLANK

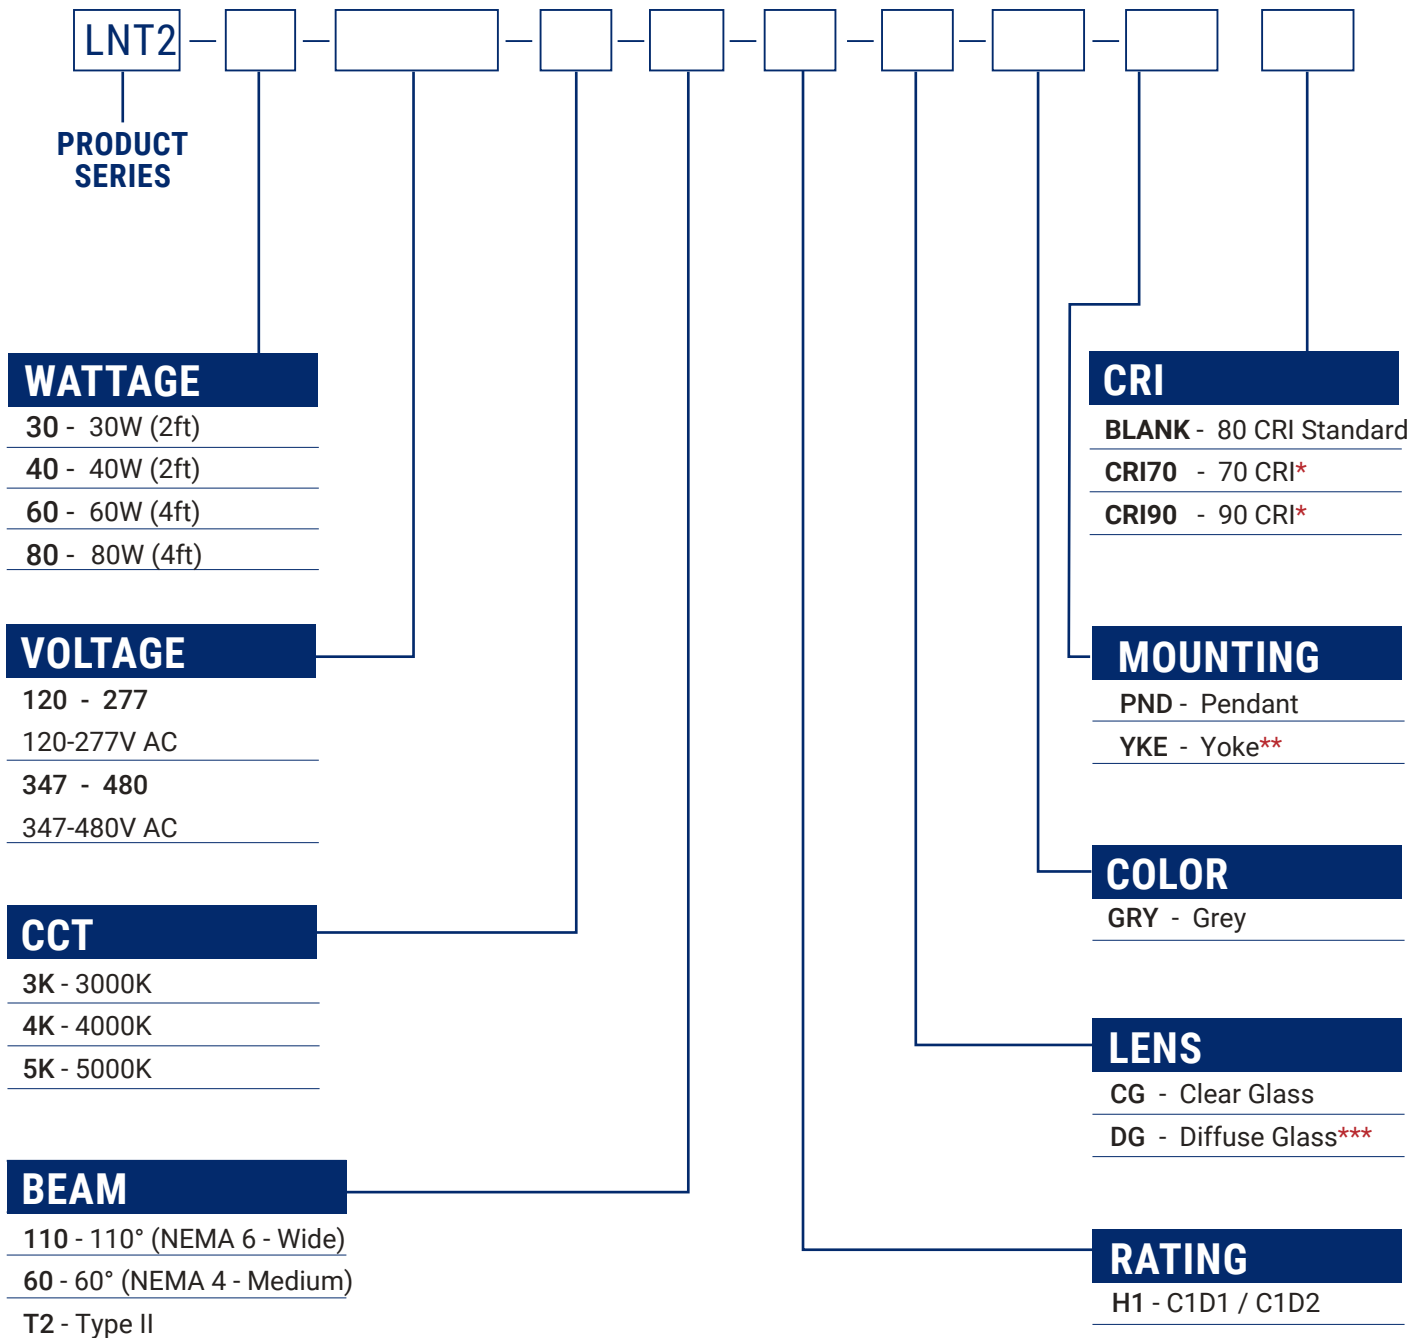


* CRI 90 option – expect longer lead time.

* DLC available with 80 CRI only. Not all product variations listed on this page are DLC qualified. Visit www.designlights.org/search to confirm qualification.

** LNT-YOKE Pre-installed as standard

*** Only available with 110°


MOUNTING ACCESSORIES




Pendant



Yoke



Chain




Pole



LNT-YOKE



LNT-YOKE P



CHAIN01



CLAMP01/02

Mounting Method	PN	Description	MPN Code
Yoke	LNT-YOKE	Yoke Mount, SUS304, Powder-Coated Grey RAL 7037	309050067
	LNT-YOKE P*	Yoke Plus Mount, SUS304, Powder-Coated Grey RAL 7037	309050333
Chain	CHAIN01	Chain Hang Kit, SS304	309050071
Pole	CLAMP01	Pipe Clamp Kit for Round Pole 1-7/8 inch OD (48 mm), SUS304	309050047
	CLAMP02	Pipe Clamp Kit for Round Pole 2-3/8 inch OD (60 mm), SUS304	309050046

* Retrofit Bracket Compatibility Chart

For customers trying to retrofit an existing fixture, use the table below as a guide to select the best bracket to suit your need

Manufacturer	Part Number	Retrofit Yoke
Crouse Hinds	DP057MTK	✓
Dialight	LTXW4	✓
	LTXW4LP	✓
AZZ™ Rig-A-Lite™	53050	✓
Appleton	RMLSB	✓

OTHER ACCESSORIES



SFCB02

PN	Description	MPN Code
SFCB02	Safety Cable Kit, SS304	309050058

REPLACEMENT PARTS (ORDERED SEPARATELY)

Part Number	Description	MPN Code
LNT2-30-120-277-Driver	Replacement Driver Kit for LNT2-30-120-277 Fixtures	303010049
LNT2-40-120-277-Driver	Replacement Driver Kit for LNT2-40-120-277 Fixtures	303010050
LNT2-60-120-277-Driver	Replacement Driver Kit for LNT2-60-120-277 Fixtures	303010051
LNT2-80-120-277-Driver	Replacement Driver Kit for LNT2-80-120-277 Fixtures	303010052
LNT2-30-347-480-Driver	Replacement Driver Kit for LNT2-30-347-480 Fixtures	303010053
LNT2-40-347-480-Driver	Replacement Driver Kit for LNT2-40-347-480 Fixtures	303010054
LNT2-60-347-480-Driver	Replacement Driver Kit for LNT2-60-347-480 Fixtures	303010055
LNT2-80-347-480-Driver	Replacement Driver Kit for LNT2-80-347-480 Fixtures	303010056
CG005-A-01	Replacement Clear Glass Lens for LNT2, LNT EM	303030014
DG005-A-01	Replacement Diffuse Glass Lens for LNT2, LNT EM	303030015

LUMEN TABLE

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
Voltage 100-277VAC 80 CRI • STANDARD							
LNT2-30-120-277-5K-110-H2-CG-GRY-YKE	30	5000K	80	110°	Clear Glass	4,245	139
LNT2-30-120-277-5K-110-H2-DG-GRY-YKE	30	5000K	80	110°	Diffuse Glass	4,051	109
LNT2-30-120-277-5K-60-H2-CG-GRY-YKE	30	5000K	80	60°	Clear Glass	4,380	124
LNT2-30-120-277-5K-T2-H2-CG-GRY-YKE	30	5000K	80	T2	Clear Glass	4,418	130
LNT2-40-120-277-5K-110-H2-CG-GRY-YKE	40	5000K	80	110°	Clear Glass	5,592	137
LNT2-40-120-277-5K-110-H2-DG-GRY-YKE	40	5000K	80	110°	Diffuse Glass	4,551	109
LNT2-40-120-277-5K-60-H2-CG-GRY-YKE	40	5000K	80	60°	Clear Glass	4,792	120
LNT2-40-120-277-5K-T2-H2-CG-GRY-YKE	40	5000K	80	T2	Clear Glass	4,902	126
LNT2-60-120-277-5K-110-H2-CG-GRY-YKE	60	5000K	80	110°	Clear Glass	8,972	151
LNT2-60-120-277-5K-110-H2-DG-GRY-YKE	60	5000K	80	110°	Diffuse Glass	6,439	109
LNT2-60-120-277-5K-60-H2-CG-GRY-YKE	60	5000K	80	60°	Clear Glass	7,716	128
LNT2-60-120-277-5K-T2-H2-CG-GRY-YKE	60	5000K	80	T2	Clear Glass	7,953	141
LNT2-80-120-277-5K-110-H2-CG-GRY-YKE	80	5000K	80	110°	Clear Glass	11,875	148
LNT2-80-120-277-5K-110-H2-DG-GRY-YKE	80	5000K	80	110°	Diffuse Glass	8,111	106
LNT2-80-120-277-5K-60-H2-CG-GRY-YKE	80	5000K	80	60°	Clear Glass	9,718	124
LNT2-80-120-277-5K-T2-H2-CG-GRY-YKE	80	5000K	80	T2	Clear Glass	10,127	137

347–480Vac models deliver the same lumen output as the 100–277Vac models.

LUMEN TABLE

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
Voltage 100-277VAC 70 CRI							
LNT2-30-120-277-5K-110-H2-CG-GRY-YKE CRI70	30	5000K	70	110°	Clear Glass	4,608	144
LNT2-30-120-277-5K-110-H2-DG-GRY-YKE CRI70	30	5000K	70	110°	Diffuse Glass	3,732	117
LNT2-30-120-277-5K-60-H2-CG-GRY-YKE CRI70	30	5000K	70	60°	Clear Glass	4,035	133
LNT2-30-120-277-5K-T2-H2-CG-GRY-YKE CRI70	30	5000K	70	T2	Clear Glass	4,070	139
LNT2-40-120-277-5K-110-H2-CG-GRY-YKE CRI70	40	5000K	70	110°	Clear Glass	6,192	149
LNT2-40-120-277-5K-110-H2-DG-GRY-YKE CRI70	40	5000K	70	110°	Diffuse Glass	4,873	117
LNT2-40-120-277-5K-60-H2-CG-GRY-YKE CRI70	40	5000K	70	60°	Clear Glass	5,131	129
LNT2-40-120-277-5K-T2-H2-CG-GRY-YKE CRI70	40	5000K	70	T2	Clear Glass	5,249	135
LNT2-60-120-277-5K-110-H2-CG-GRY-YKE CRI70	60	5000K	70	110°	Clear Glass	8,670	147
LNT2-60-120-277-5K-110-H2-DG-GRY-YKE CRI70	60	5000K	70	110°	Diffuse Glass	6,895	117
LNT2-60-120-277-5K-60-H2-CG-GRY-YKE CRI70	60	5000K	70	60°	Clear Glass	8,262	137
LNT2-60-120-277-5K-T2-H2-CG-GRY-YKE CRI70	60	5000K	70	T2	Clear Glass	8,516	151
LNT2-80-120-277-5K-110-H2-CG-GRY-YKE CRI70	80	5000K	70	110°	Clear Glass	10,810	142
LNT2-80-120-277-5K-110-H2-DG-GRY-YKE CRI70	80	5000K	70	110°	Diffuse Glass	8,685	114
LNT2-80-120-277-5K-60-H2-CG-GRY-YKE CRI70	80	5000K	70	60°	Clear Glass	10,406	133
LNT2-80-120-277-5K-T2-H2-CG-GRY-YKE CRI70	80	5000K	70	T2	Clear Glass	10,844	147
Voltage 100-277VAC 90 CRI							
LNT2-30-120-277-5K-110-H2-CG-GRY-YKE CRI90	30	5000K	90	110°	Clear Glass	4,147	130
LNT2-30-120-277-5K-110-H2-DG-GRY-YKE CRI90	30	5000K	90	110°	Diffuse Glass	3,359	105
LNT2-30-120-277-5K-60-H2-CG-GRY-YKE CRI90	30	5000K	90	60°	Clear Glass	3,632	120
LNT2-30-120-277-5K-T2-H2-CG-GRY-YKE CRI90	30	5000K	90	T2	Clear Glass	3,663	125
LNT2-40-120-277-5K-110-H2-CG-GRY-YKE CRI90	40	5000K	90	110°	Clear Glass	5,573	134
LNT2-40-120-277-5K-110-H2-DG-GRY-YKE CRI90	40	5000K	90	110°	Diffuse Glass	4,386	105
LNT2-40-120-277-5K-60-H2-CG-GRY-YKE CRI90	40	5000K	90	60°	Clear Glass	4,618	116
LNT2-40-120-277-5K-T2-H2-CG-GRY-YKE CRI90	40	5000K	90	T2	Clear Glass	4,724	122
LNT2-60-120-277-5K-110-H2-CG-GRY-YKE CRI90	60	5000K	90	110°	Clear Glass	7,803	132
LNT2-60-120-277-5K-110-H2-DG-GRY-YKE CRI90	60	5000K	90	110°	Diffuse Glass	6,206	105
LNT2-60-120-277-5K-60-H2-CG-GRY-YKE CRI90	60	5000K	90	60°	Clear Glass	7,436	123
LNT2-60-120-277-5K-T2-H2-CG-GRY-YKE CRI90	60	5000K	90	T2	Clear Glass	7,664	136
LNT2-80-120-277-5K-110-H2-CG-GRY-YKE CRI90	80	5000K	90	110°	Clear Glass	9,729	128
LNT2-80-120-277-5K-110-H2-DG-GRY-YKE CRI90	80	5000K	90	110°	Diffuse Glass	7,817	103
LNT2-80-120-277-5K-60-H2-CG-GRY-YKE CRI90	80	5000K	90	60°	Clear Glass	9,365	120
LNT2-80-120-277-5K-T2-H2-CG-GRY-YKE CRI90	80	5000K	90	T2	Clear Glass	9,760	132

347–480Vac models deliver the same lumen output as the 100–277Vac models.
For additional information, please contact your sales representative.

A DIRECT RETROFIT FROM HID TO LED

The LNT series LED is easy to retrofit in the same configuration as your existing HID luminaires. For example, a 80-watt Linear Tuff (LNT2-80) delivers virtually the same illumination as its equivalent 250 watt Metal Halide luminaire while providing 80% reduction in energy costs and up to 147,000 hours of continuous operation.


MODELS	Lumen Output (Lm)	MH Equivalent (W)	HPS Equivalent (W)
LNT2-30	4,245	100	100
LNT2-40	5,592	150	200
LNT2-60	8,972	200	250
LNT2-80	11,875	250	310


THE RIGHT BEAM PATTERN FOR YOUR APPLICATION

RSL optic package is engineered to deliver maximum footcandles efficiently where you need them, without wasted light or overspill.


RSL offers complimentary lighting design services for our products using industry-leading AGI32 software, tailored for projects of all sizes in harsh and hazardous locations. We assist you in determining the number of fixtures needed, the types of lights to use, their optimal placement, and how to maximize energy savings—all within budget.

Simply fill out the form (<https://dev.redskylighting.com/lighting-design>) with a few key details, request a layout, and we'll bring your ideas to life within 2-5 business days.


Beam	NEMA/IESNA Type	Beam Description	Beam Projection Distance
30°	NEMA 3	Medium Narrow	
60°	NEMA 4	Medium	
90°	NEMA 5	Medium Wide	
120°	NEMA 6	Wide	
T1	Type I	Asymmetric distributions, well suited for narrow areas, such as Conveyor belts, Aisleways, Catwalks, Loading docks and Tunnels.	
T2	Type II	Asymmetric distributions, well suited for narrow areas, such as roadways, paths and driveways.	
T3	Type III	Asymmetric distributions, well suited for site / area perimeters, wide roadways, and open areas.	
T5	NEMA 7 Type V (Square)	Very Wide: symmetrical pattern with excellent uniformity for large, open areas.	

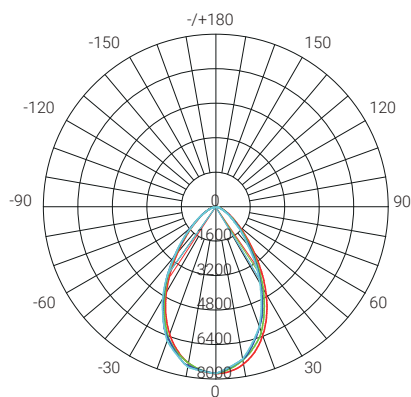

**60°
NEMA 4 - Medium**

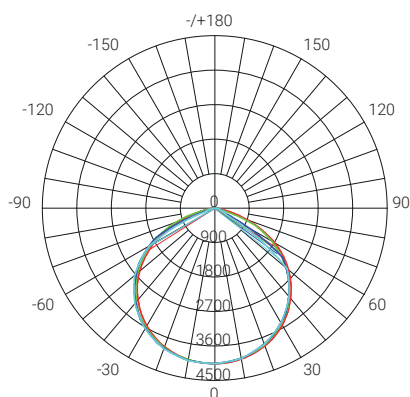



**110°
NEMA 6 - Wide**

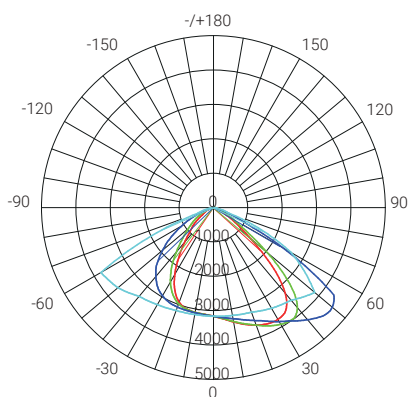

Type II

DIMENSIONS


unit: in(mm)

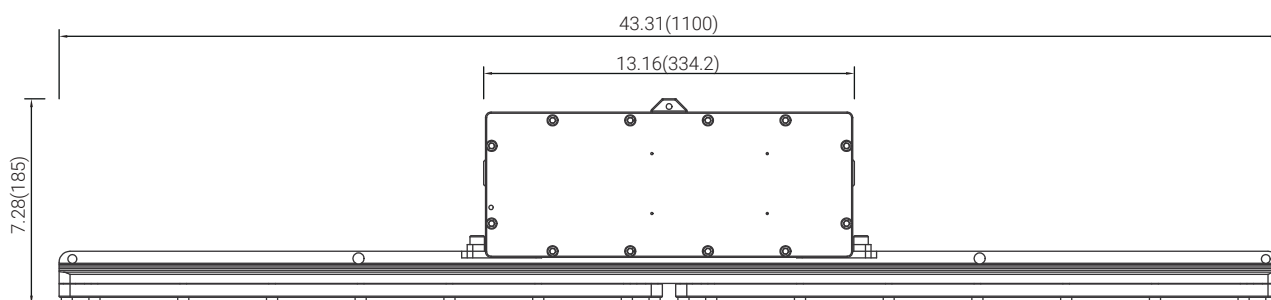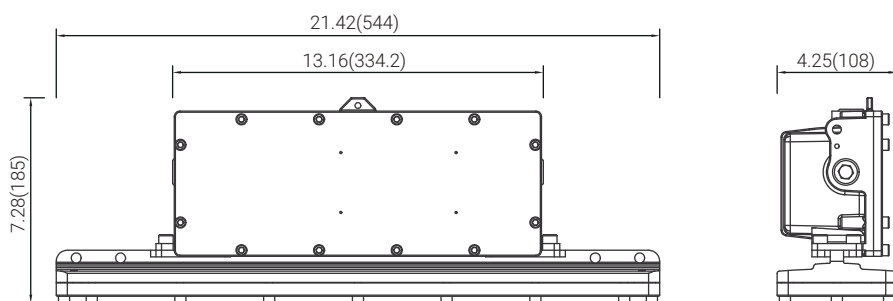


Pendant

DIMENSIONS


unit: in(mm)

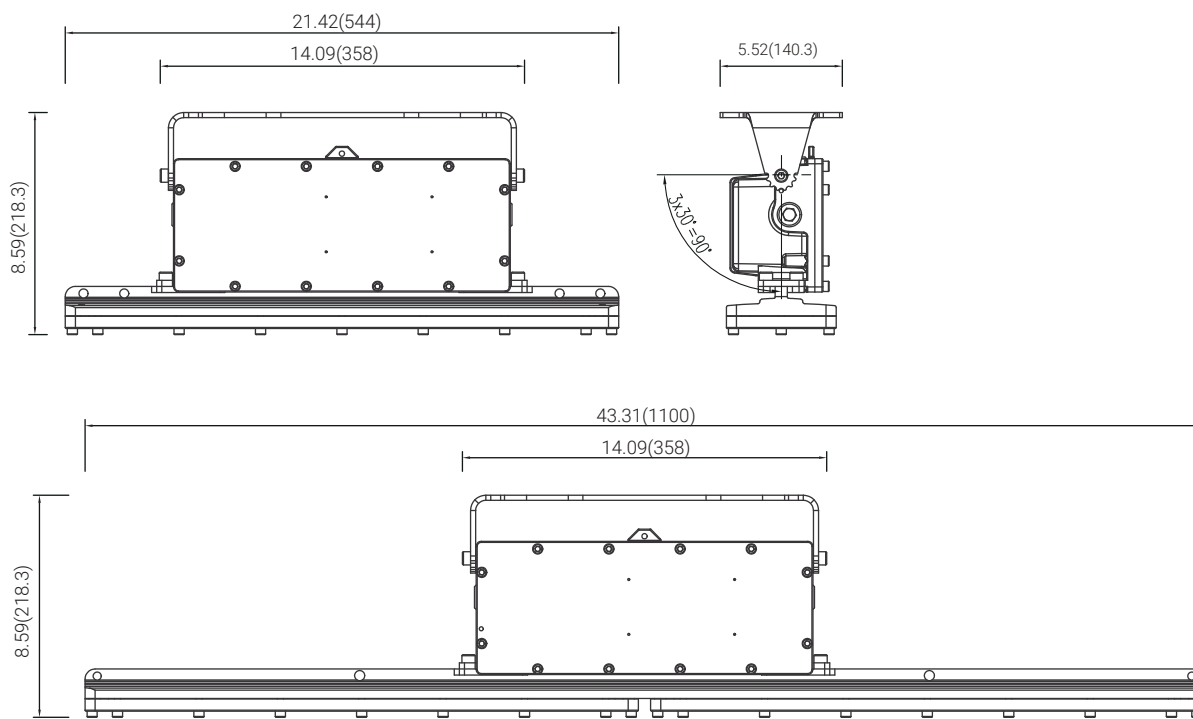

Yoke

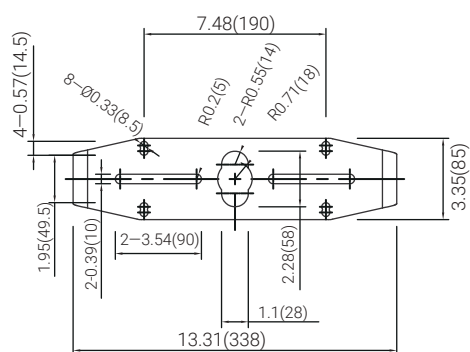


LNT-YOKE

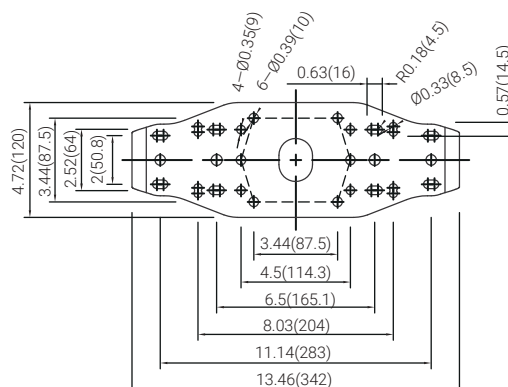


LNT-YOKE P

unit: in(mm)

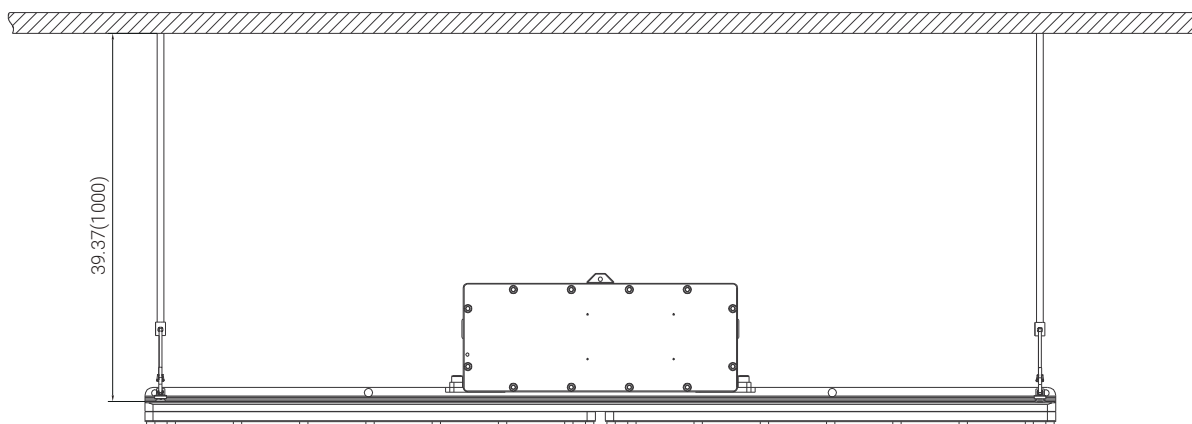

Chain

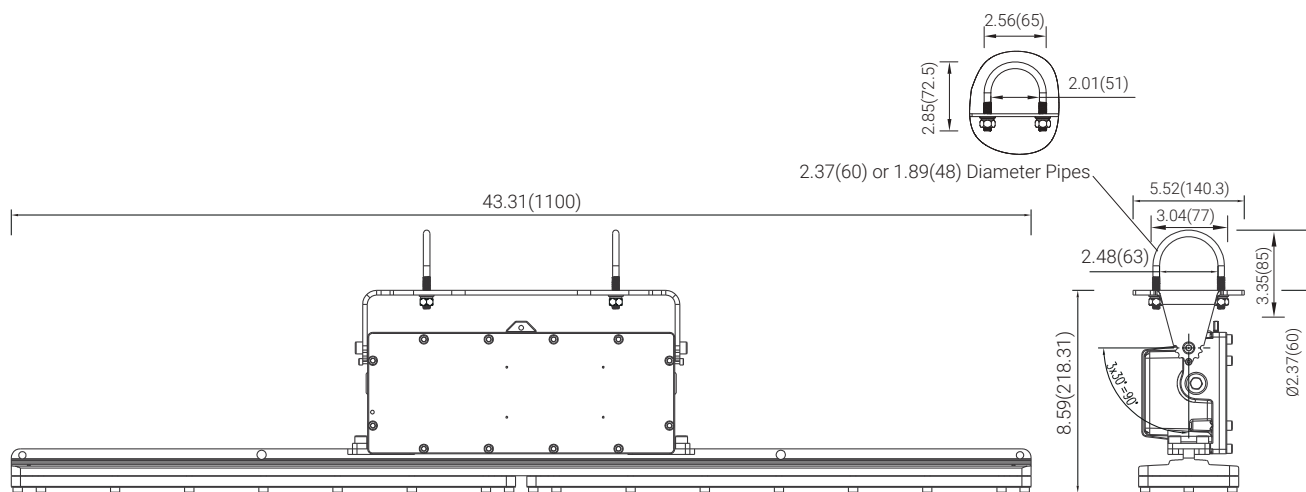

Pole

HAZARDOUS LOCATION LIGHTING BASICS

Atmosphere Groups

Substance	Hazard Class	Division Groups	Zone Groups
Acetylene	Class I Flammable Gases	Group A	IIC
Hydrogen		Group B	IIC
Ethylene		Group C	IIB
Propane		Group D	IIA
Methane		Group D	IIA ²
Combustible Metal Dusts	Class II Combustible Dusts	Group E ¹	IIIC ³
Combustible Carbonaceous Dust		Group F	IIIB ³
Combustible Dusts not in Group E or F (Flour, Grain, Wood, Plastics, Chemicals)		Group G	IIIB ³
Combustible Fibers and Flyings	Class III Fibers and Flyings	Not Applicable	IIIA ³

Note 1: Group E is applicable to Class II, Division 1 only.
 Note 2: Methane is a Group IIA Gas for non-mining applications.
 Note 3: Group IIIA, IIIB and IIIC have not been adopted by the Canadian Electrical Code.

Temperature Classification

Max. Surface Temperatures	NEC®500 CEC®	NEC®500/IEC- Group II
450°C(842°F)	T1	T1
300°C(572°F)	T2	
280°C(536°F)	T2A	T2
260°C(500°F)	T2B	
230°C(446°F)	T2C	
215°C(419°F)	T2D	
200°C(392°F)	T3	T3
180°C(256°F)	T3A	
165°C(329°F)	T3B	
160°C(320°F)	T3C	
135°C(275°F)	T4	T4
120°C(248°F)	T4A	
100°C(212°F)	T5	T5
85°C(185°F)	T6	T6

Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone 1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone 2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

IP Codes

1st No.	Solid Objects
0	No protection
1	Objects greater than 50mm
2	Objects greater than 12.5mm
3	Objects greater than 2.5mm
4	Objects greater than 1mm
5	Dust protected
6	Dust proof
2nd No.	Liquids
0	No protection
1	Vertically dripping
2	Dripping up to 15°
3	Limited spraying
4	Splashing from all directions
5	Hosing jets from all directions
6	Strong hosing jets from all directions
7	Temporary immersion
8	Continuous immersion
9	Steam-jet cleaning

IK Ratings

IK Code	Level of Protection Achieved
IK00	Not protected
IK01	Protected against 0.14 joules impact
IK02	Protected against 0.2 joules impact
IK03	Protected against 0.35 joules impact
IK04	Protected against 0.5 joules impact
IK05	Protected against 0.7 joules impact
IK06	Protected against 1 joules impact
IK07	Protected against 2 joules impact
IK08	Protected against 5 joules impact
IK09	Protected against 10 joules impact
IK10	Protected against 20 joules impact



1(262) 456-5002
contact@redskylighting.com
www.redskylighting.com

RED SKY LIGHTING LLC
9370 Pittsburgh Ave Rancho
Cucamonga, CA 91730, USA

Disclaimer

The product information provided is, to the best of Red Sky Lighting's knowledge, accurate as of the date of publication. However, purchasers and end-users of Red Sky Lighting's products should refer to the documentation available on www.redskylighting.com for the most up-to-date and controlling product specifications, installation manuals, sales terms and conditions, and warranty terms. To the extent any contract is formed for the sale of Red Sky Lighting's products, whether directly with Red Sky Lighting or through any third party, the versions of such documentation posted on www.redskylighting.com as of the date of sale shall govern and prevail over any inconsistent information that may be provided elsewhere. In the event of a conflict between the information contained in this document and that available on www.redskylighting.com, the website documentation shall control.