

LINEAR EMERGENCY SERIES

LED LIGHTING FOR HAZARDOUS AREAS




Reliable. Durable. Efficient.
5,800 to 12,500 (EM:2,800)
lumen models

RED SKY
SERIOUSLY SAFE LIGHTS™

ABOUT RED SKY LIGHTING

PIONEERING INDUSTRIAL ILLUMINATION FOR HARSH & HAZARDOUS CONDITIONS

- A leading manufacturer of premium LED lights for demanding work conditions
- Headquartered in California, products assembled in the USA
- Servicing global clients across 4 continents in metal processing, oil & gas, marine, manufacturing
- Renowned for quality, dependability, client care and uncompromising safety standards

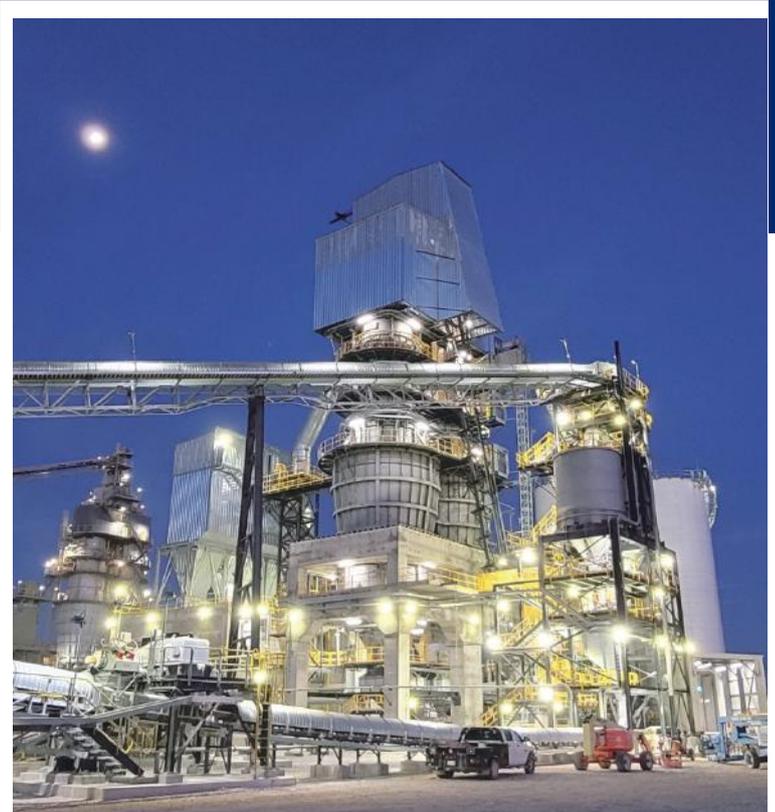

WHY CHOOSE RED SKY

❧ SERIOUSLY SAFE LIGHTS

- Rigorously tested in our professional labs
- Surpassing industry certifications and safety protocols
- Crafted with highest grade components for maximum durability

❧ TOP-NOTCH SERVICES

- Team of experts for seamless support
- Energy audit services, lighting simulation services
- Hassle-free return policy and management

❧ FAST DELIVERY

- Majority of orders delivered within 14 days
- Same day shipping for products in stock
- Real-time order tracking for full transparency

❧ SUSTAINABLE SOLUTIONS

- High luminous efficacy LEDs for energy savings
- Conscious product design
- Recyclable materials for products and packaging



LINEAR EMERGENCY SERIES

ILLINOIS, USA

FEATURES



- ❧ Best-in-class system efficacy -Up to 150 Lm/W
- ❧ Charge time 24h, Emergency run time 90 mins, Rated load 12W in emergency mode
- ❧ Wide ambient temp.range from 0°C to +50°C (32°F ~ +122°F)
- ❧ Safe and reliable heat transfer - Offering a T-rating of T4(CID2)/T6(CIID1)
- ❧ Instant on/off operation
- ❧ Shock-and vibration-resistant - Durable LEDs with solder-less board connection
- ❧ All exposed fasteners with quality stainless steel 316
- ❧ UV stable and impact resistant clear or diffused PC lens
- ❧ Slim and compact design

RATINGS

Class I, Division 2, Groups A, B, C and D;
Class II, Division 1, Groups E, F and G
Class II Division 2, Groups F, G
Class III
Class I, Zone 2, Group IIC
Zone 21, Group IIIC
IP66
IK08 (PC)
Salt Spray 720 hrs (ASTM B117)

CERTIFICATIONS

UL 844
CSA C22.2 No. 137-18
CSA C22.2 No. 25-17
UL 924
CSA C22.2 No. 141-15
FCC Part 15, Subpart B


TECHNICAL PARAMETERS

Specification	LNR-EM-40	LNR-EM-80
Electrical Parameters		
Power	40W	80W
Rated Input Current	0.371A@120V AC, 0.161A@277V AC	0.741A@120V AC, 0.321A@277V AC
Voltage/Frequency	120-277V AC 50/60Hz	
Power Factor	≥0.90	
THD	<20%	
L70	120,000 hrs@122°F	
Surge Protection	10KV	
Supply Wire	12-18AWG, Rated 90°C	
Charge Time	24 hours	
Emergency Run Time	90mins	
Battery	LiFePO ₄	
Warranty	LEDs:10 Years, Driver:7 Years, Battery:3 Years	
Optical Parameters		
Lumen Output*	5,857Lm	12,291Lm
Lumen Output (EM)*	2,778Lm	2,822Lm
Lumen Efficacy*	150Lm/w	
Available Beam Angle	110°	
Correlated Color Temperature (CCT)	4000K/5000K	
Color Rendering In	80 CRI	
Mechanical Parameters		
Housing Material	Marine Grade Aluminium	
Hardware	Stainless steel 316	
Lens Material	Polycarbonate	
Mounting Options	Pendant, Yoke, Chain, Pole	
Product Weight	16.5lbs/7.5kg	18.3lbs/8.3kg
Package Weight	18.6lbs/8.6kg	20.4lbs/9.4kg
Cable Entry	(3) 3/4" NPT	
Product Dimensions(L×W×H)	23.6×5.0×6.8in(600×127×173 mm)	47.2×5.0×6.8in(1200×127×173 mm)
Package Dimensions(L×W×H)	26.6×7.1×9.1in(675×180×230 mm)	50.2×7.1×9.1in(1275×180×230 mm)
Environmental Parameters		
Ambient Operating Temperature	32°F~+122°F(0°C~+50°C)	
T-Code Rating	CID2-T4 / CIID1-T6	
Ambient Operating Humidity	10%~90% RH	
EPA wind rating (FT ² /m ²)	1.463/0.140	1.972/0.180

* Value calculated based on 5000K, 80 CRI and Clear PC, varies to different spec.
70 CRI & 90 CRI optional, DLC available with 70 CRI only.

ORDERING INFORMATION


EXAMPLE: LNR -40-120-277-5K-H2-CP-GRY-PND-EM

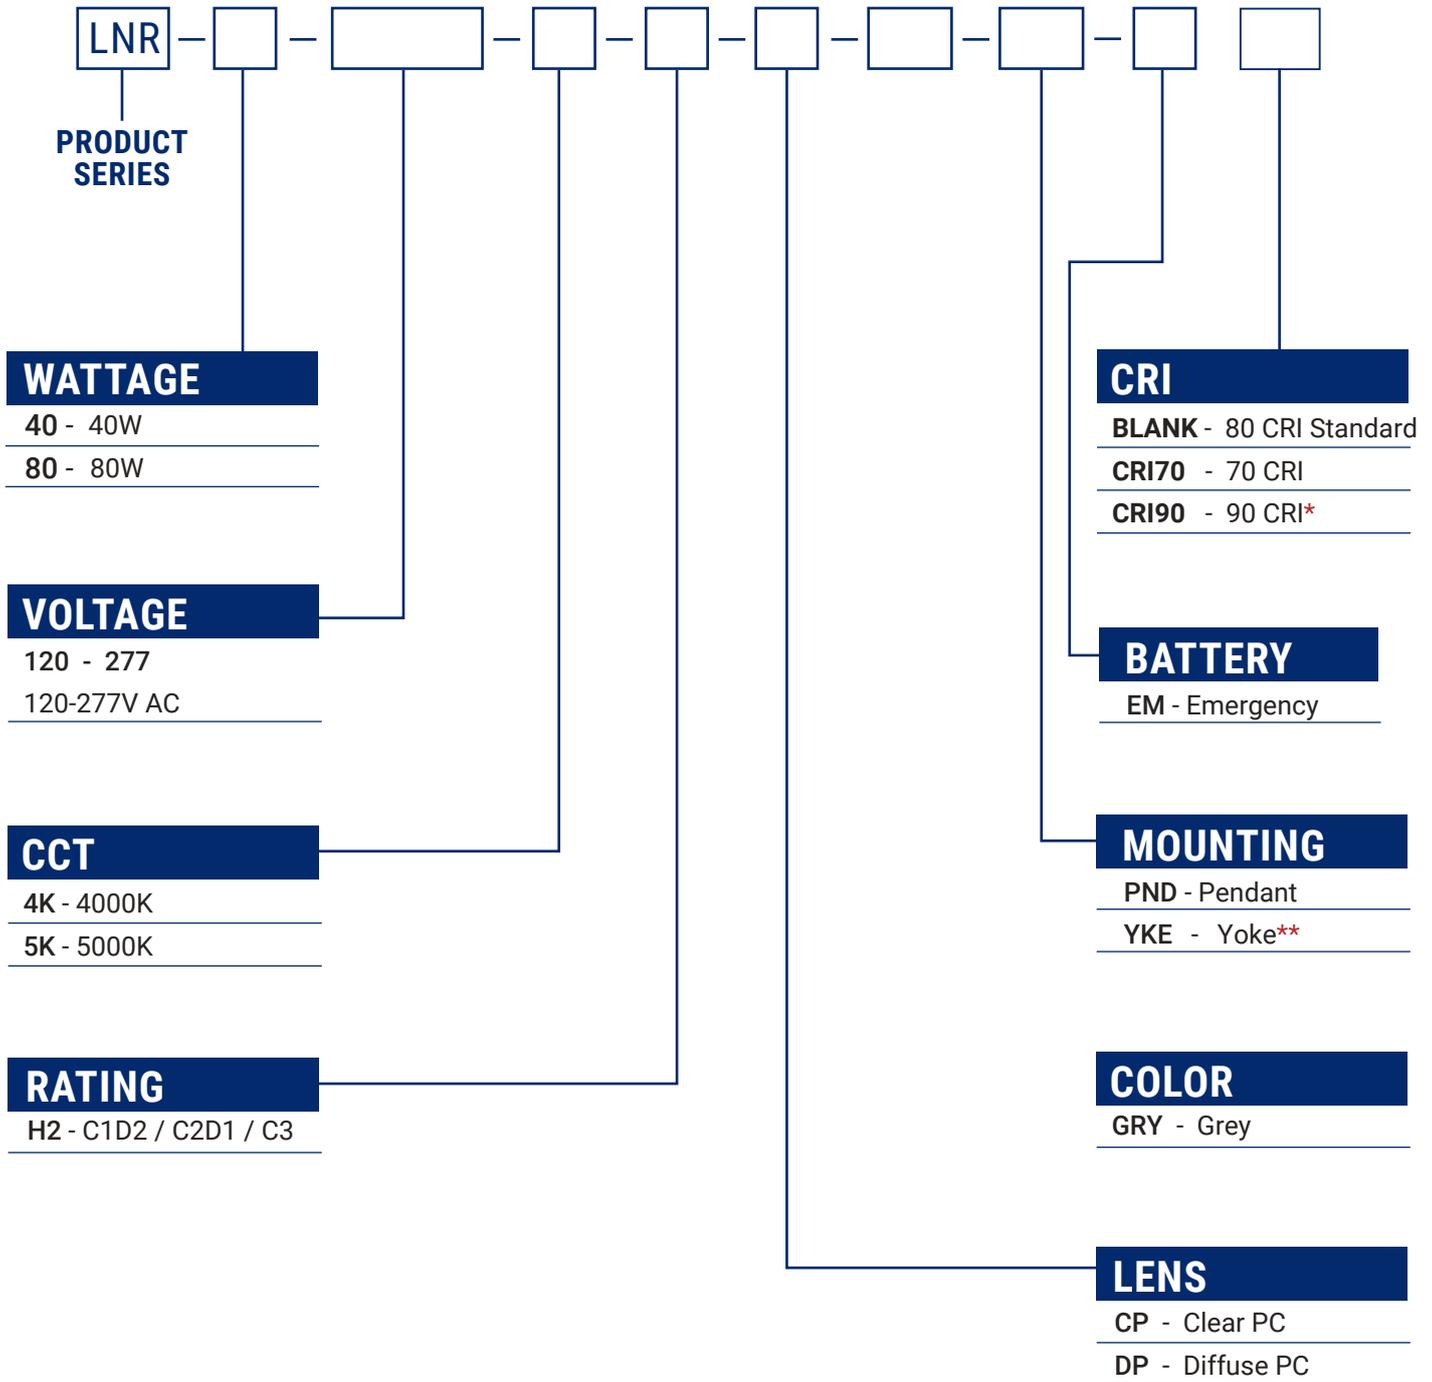

* CRI 90 option – expect longer lead time.

** LNR-YOKE Pre-installed as standard.


MOUNTING ACCESSORIES




Pendant



Yoke




Chain



Pole



LNR-YOKE



CHAIN01



CLAMP01/02



SFCB03

Mounting Method	PN	Description	MPN Code
Yoke	LNR-YOKE	Yoke Mount, SUS304, Powder-Coated Grey RAL 7037	309050042
Chain	CHAIN01	Chain Hang Kit, SUS304	309050071
Pole	CLAMP01	Pipe Clamp Kit for Round Pole 1-7/8 inch OD (48 mm), SUS304	309050047
	CLAMP02	Pipe Clamp Kit for Round Pole 2-3/8 inch OD (60 mm), SUS304	309050046
	SFCB03	Safety Cable Kit, SS304	309050049

REPLACEMENT PARTS (ORDERED SEPARATELY)

Part Number	Description	MPN Code
LNR-40-100-277-Driver	Replacement Driver Kit for LNR-40-120-277-EM Fixtures	303010057
LNR-80-100-277-Driver	Replacement Driver Kit for LNR-80-120-277-EM Fixtures	303010058
LNR-EM Driver	Replacement Emergency Backup Driver Kit (Battery included) for LNR-EM Fixtures	303010107
LNR-*-EM Battery	Replacement Battery for LNR-*-EM	303040004
CP004-A-01	Replacement Clear PC Lens for LNR2, LNR EM, LLP, LNH	303030012
DP004-A-01	Replacement Diffuse PC Lens for LNR2, LNR EM, LLP, LNH	303030013

LUMEN TABLE

PN	Wattage (W)	CCT	CRI	Beam	Lens	Lumen Output (Lm)	Efficiency (Lm/W)
----	-------------	-----	-----	------	------	-------------------	-------------------

Voltage 100-277VAC 80 CRI • STANDARD

LNR-40-120-277-5K-H2-CP-GRY-PND-EM	40	5000K	80	110°	Clear PC	5,857	148
LNR-40-120-277-5K-H2-DP-GRY-PND-EM	40	5000K	80	110°	Diffuse PC	5,060	127
LNR-80-120-277-5K-H2-CP-GRY-PND-EM	80	5000K	80	110°	Clear PC	12,291	150
LNR-80-120-277-5K-H2-DP-GRY-PND-EM	80	5000K	80	110°	Diffuse PC	9,988	126

Emergency Mode: Voltage 100-277VAC 80 CRI • STANDARD

LNR-40-120-277-5K-H2-CP-GRY-PND-EM	15	5000K	80	110°	Clear PC	2,778	189
LNR-40-120-277-5K-H2-DP-GRY-PND-EM	15	5000K	80	110°	Diffuse PC	2,124	141
LNR-80-120-277-5K-H2-CP-GRY-PND-EM	15	5000K	80	110°	Clear PC	2,822	191
LNR-80-120-277-5K-H2-DP-GRY-PND-EM	15	5000K	80	110°	Diffuse PC	2,281	153

Voltage 100-277VAC 70 CRI

LNR-40-120-277-5K-H2-CP-GRY-PND-EM CRI70	40	5000K	70	110°	Clear Glass	5,517	140
LNR-40-120-277-5K-H2-DP-GRY-PND-EM CRI70	40	5000K	70	110°	Clear Glass	5,441	137
LNR-80-120-277-5K-H2-CP-GRY-PND-EM CRI70	80	5000K	70	110°	Clear Glass	11,834	149
LNR-80-120-277-5K-H2-DP-GRY-PND-EM CRI70	80	5000K	70	110°	Diffuse Glass	10,740	136

Emergency Mode: Voltage 100-277VAC 70 CRI

LNR-40-120-277-5K-H2-CP-GRY-PND-EM CRI70	15	5000K	70	110°	Clear PC	2,625	175
LNR-40-120-277-5K-H2-DP-GRY-PND-EM CRI70	15	5000K	70	110°	Diffuse PC	2,284	152
LNR-80-120-277-5K-H2-CP-GRY-PND-EM CRI70	15	5000K	70	110°	Clear PC	2,736	182
LNR-80-120-277-5K-H2-DP-GRY-PND-EM CRI70	15	5000K	70	110°	Diffuse PC	2,453	164

Voltage 100-277VAC 90 CRI

LNR-40-120-277-5K-H2-CP-GRY-PND-EM CRI90	40	5000K	90	110°	Clear Glass	4,894	124
LNR-40-120-277-5K-H2-DP-GRY-PND-EM CRI90	40	5000K	90	110°	Clear Glass	4,826	122
LNR-80-120-277-5K-H2-CP-GRY-PND-EM CRI90	80	5000K	90	110°	Clear Glass	10,497	132
LNR-80-120-277-5K-H2-DP-GRY-PND-EM CRI90	80	5000K	90	110°	Diffuse Glass	9,526	121

Emergency Mode: Voltage 100-277VAC 90 CRI

LNR-40-120-277-5K-H2-CP-GRY-PND-EM CRI90	15	5000K	90	110°	Clear PC	2,328	155
LNR-40-120-277-5K-H2-DP-GRY-PND-EM CRI90	15	5000K	90	110°	Diffuse PC	2,026	135
LNR-80-120-277-5K-H2-CP-GRY-PND-EM CRI90	15	5000K	90	110°	Clear PC	2,427	161
LNR-80-120-277-5K-H2-DP-GRY-PND-EM CRI90	15	5000K	90	110°	Diffuse PC	2,176	145

347-480Vac models deliver the same lumen output as the 100-277Vac models.

This table lists only selected lumen packages. For additional model parameters, please contact our sales team.


Note: LXX# = nominal lumens. Verify lumen package before ordering.

LUMEN MAINTENANCE

Hours Ambient	0	15,000	30,000	45,000	60,000	75,000	90,000	100,000	150,000
25°C	100%	96%	92%	88%	84%	80%	76%	74%	63%
35°C	100%	96%	92%	88%	84%	80%	76%	74%	63%
45°C	100%	96%	92%	88%	84%	80%	76%	74%	63%
50°C	100%	96%	92%	88%	84%	80%	76%	74%	63%

LUMINAIRE LIFESPAN

Ambient Temperature	Luminaire Lifespan (Hours)	Rated Service Life - Years (24/7 Operation)	Rated Service Life - Years (12/7 Operation)
25°C (+77°F)	100,000	11	23
35°C (+95°F)	100,000	11	23
45°C (+113°F)	100,000	11	23
50°C (+122°F)	100,000	11	23

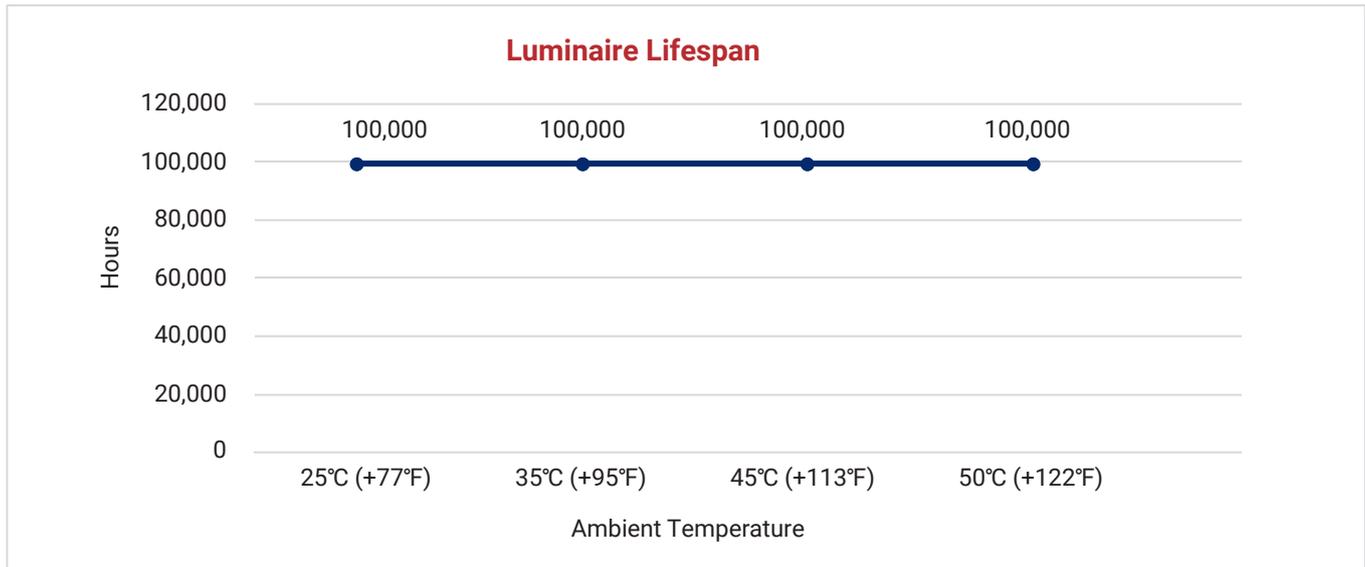

Information shown for reference only and may vary by configuration.

A DIRECT RETROFIT FROM HID TO LED

The LNR EM series LED is easy to retrofit in the same configuration as your existing HID luminaires. For example, a 80-watt Linear Emergency (LNR-80-EM) delivers virtually the same illumination as its equivalent 250 watt Metal Halide luminaire while providing 80% reduction in energy costs and up to 120,000 hours of continuous operation.



MODELS	Lumen Output (Lm)	MH Equivalent (W)	HPS Equivalent (W)
LNR-40-EM	5,857	150	150
LNR-80-EM	12,291	250	310

THE RIGHT BEAM PATTERN FOR YOUR APPLICATION


RSL optic package is engineered to deliver maximum footcandles efficiently where you need them, without wasted light or overspill.

RSL offers complimentary lighting design services for our products using industry-leading AGI32 software, tailored for projects of all sizes in harsh and hazardous locations. We assist you in determining the number of fixtures needed, the types of lights to use, their optimal placement, and how to maximize energy savings—all within budget.

Simply fill out the form (<https://dev.redskylighting.com/lighting-design>) with a few key details, request a layout, and we'll bring your ideas to life within 2-5 business days.



Beam	NEMA/IESNA Type	Beam Description	Beam Projection Distance
30°	NEMA 3	Medium Narrow	
60°	NEMA 4	Medium	
90°	NEMA 5	Medium Wide	
120°	NEMA 6	Wide	
T1	Type I	Asymmetric distributions, well suited for narrow areas, such as Conveyor belts, Aisleways, Catwalks, Loading docks and Tunnels.	
T2	Type II	Asymmetric distributions, well suited for narrow areas, such as roadways, paths and driveways.	
T3	Type III	Asymmetric distributions, well suited for site / area perimeters, wide roadways, and open areas.	
T5	NEMA 7 Type V (Square)	Very Wide: symmetrical pattern with excellent uniformity for large, open areas.	

PHOTOMETRIC

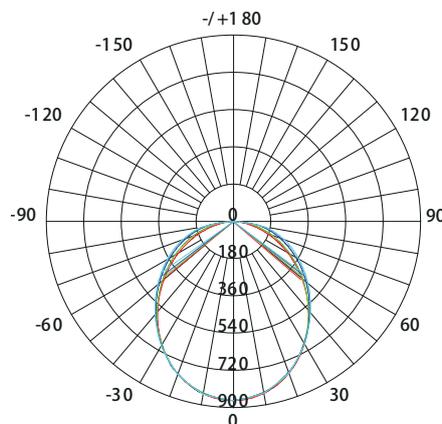


110°
NEMA 6 - Wide

unit: in(mm)

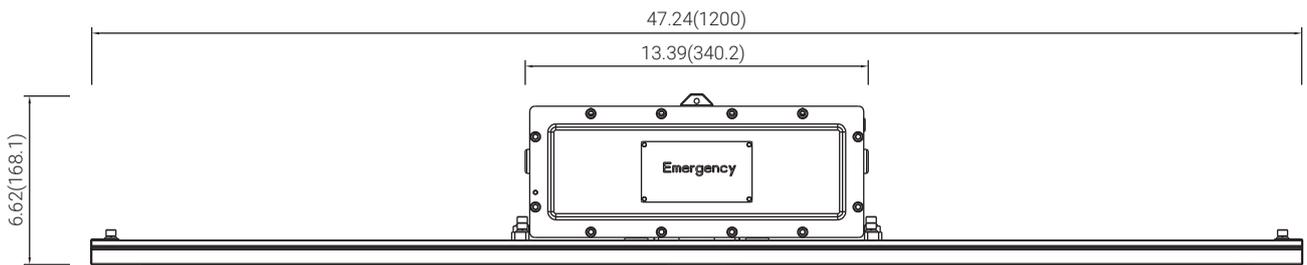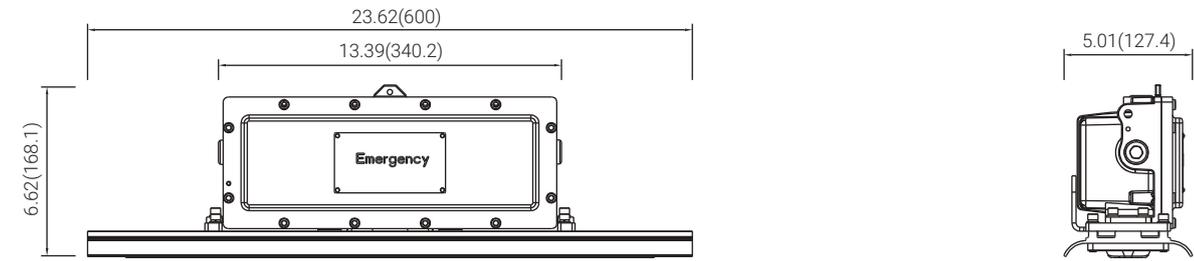



Pendant

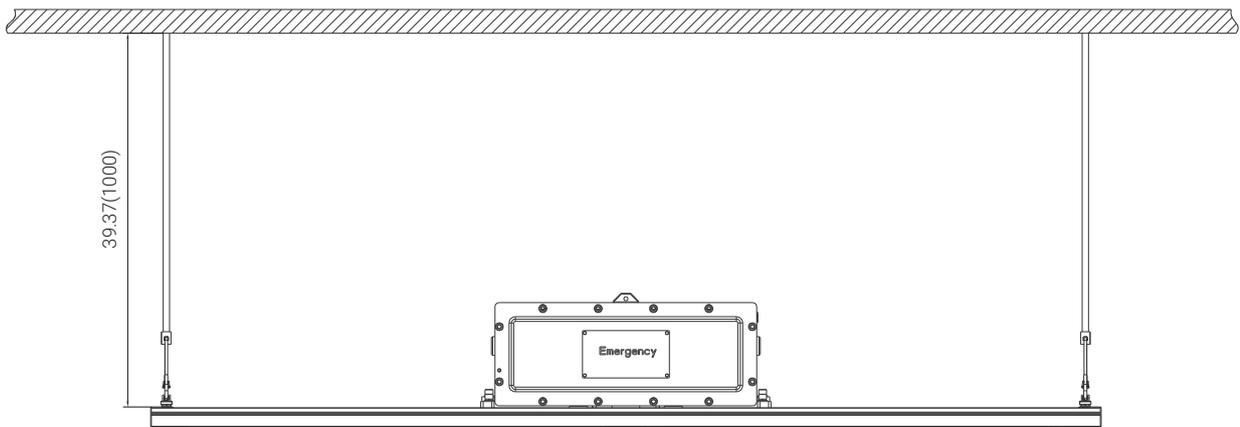


Chain

DIMENSIONS

unit: in(mm)

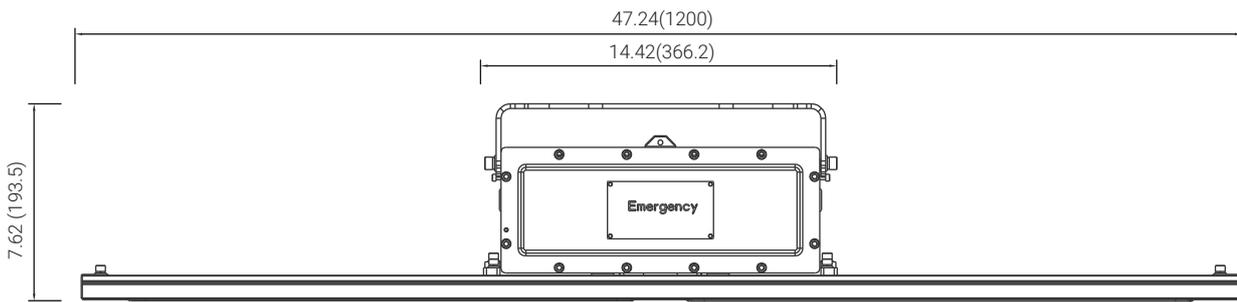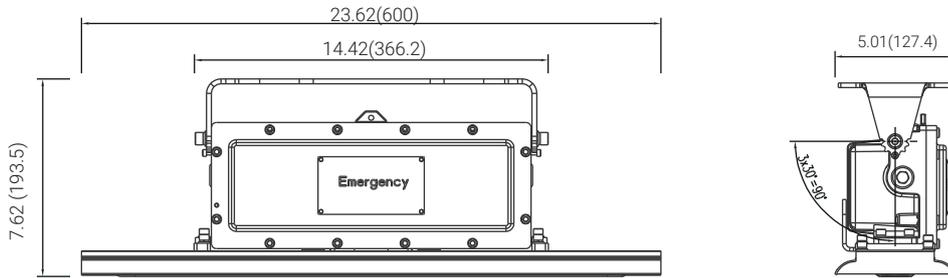

Yoke

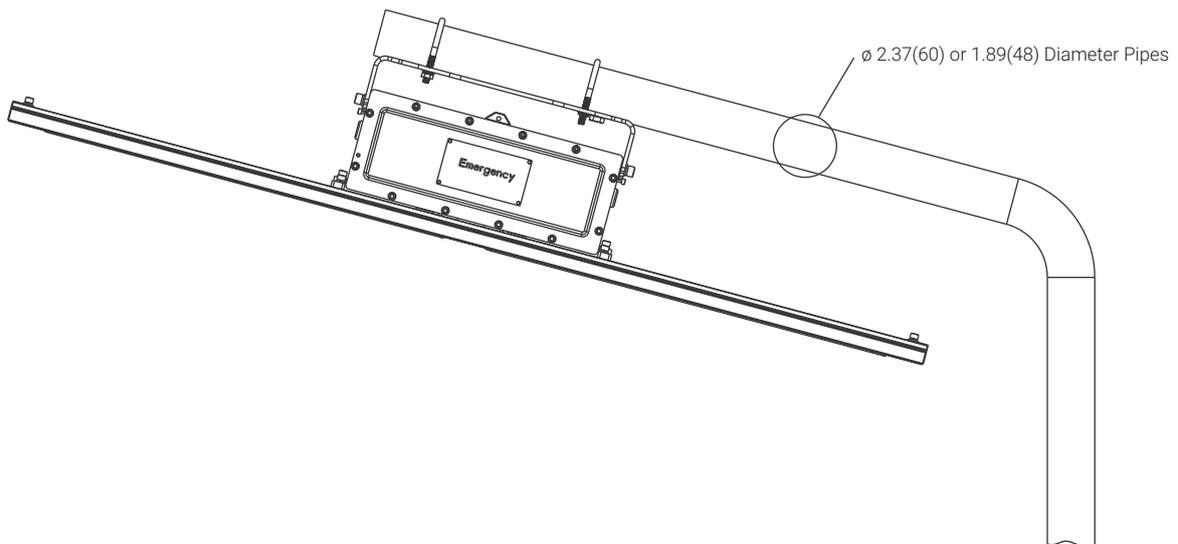

Pole

HAZARDOUS LOCATION LIGHTING BASICS

Atmosphere Groups

Temperature Classification

Substance	Hazard Class	Division Groups	Zone Groups	Max. Surface Temperatures	NEC®500 CEC®	NEC®500/IEC-Group II
Acetylene	Class I Flammable Gases	Group A	IIC	450°C(842°F)	T1	T1
Hydrogen		Group B	IIC	300°C(572°F)	T2	
Ethylene		Group C	IIB	280°C(536°F)	T2A	T2
Propane		Group D	IIA	260°C(500°F)	T2B	
Methane		Group D	IIA ²	230°C(446°F)	T2C	
Combustible Metal Dusts	Group E ¹	IIIC ³	215°C(419°F)	T2D		
Combustible Carbonaceous Dust	Class II Combustible Dusts	Group F	IIIB ³	200°C(392°F)	T3	T3
Combustible Dusts not in Group E or F (Flour, Grain, Wood, Plastics, Chemicals)		Group G	IIIB ³	180°C(256°F)	T3A	
Combustible Fibers and Flyings		Not Applicable	IIIA ³	165°C(329°F)	T3B	
				160°C(320°F)	T3C	
				135°C(275°F)	T4	T4
				120°C(248°F)	T4A	
				100°C(212°F)	T5	T5
				85°C(185°F)	T6	T6

Note 1: Group E is applicable to Class II, Division 1 only.
 Note 2: Methane is a Group IIA Gas for non-mining applications.
 Note 3: Group IIIA, IIIB and IIIC have not been adopted by the Canadian Electrical Code.

Classification of Divisions and Zones

Hazard Level	Division Scheme	Zone Scheme	Definitions
Continuous Hazard	Division 1	Zone 0 / Zone 20	A place in which an explosive atmosphere is continually present
Intermittent Hazard		Zone 1 / Zone 21	A place in which an explosive atmosphere is likely to occur in normal operation
Hazard Under Abnormal Conditions	Division 2	Zone 2 / Zone 22	A place in which an explosive atmosphere is not likely to occur in normal operation, but may occur for short periods

IP Codes

1st No.	Solid Objects
0	No protection
1	Objects greater than 50mm
2	Objects greater than 12.5mm
3	Objects greater than 2.5mm
4	Objects greater than 1mm
5	Dust protected
6	Dust proof
2nd No.	Liquids
0	No protection
1	Vertically dripping
2	Dripping up to 15°
3	Limited spraying
4	Splashing from all directions
5	Hosing jets from all directions
6	Strong hosing jets from all directions
7	Temporary immersion
8	Continuous immersion
9	Steam-jet cleaning

IK Ratings

IK Code	Level of Protection Achieved
IK00	Not protected
IK01	Protected against 0.14 joules impact
IK02	Protected against 0.2 joules impact
IK03	Protected against 0.35 joules impact
IK04	Protected against 0.5 joules impact
IK05	Protected against 0.7 joules impact
IK06	Protected against 1 joules impact
IK07	Protected against 2 joules impact
IK08	Protected against 5 joules impact
IK09	Protected against 10 joules impact
IK10	Protected against 20 joules impact



+1 (262) 456-5002
contact@redskylighting.com
www.redskylighting.com

RED SKY LIGHTING LLC
9370 Pittsburgh Ave.
Rancho Cucamonga, CA 91730, USA

Disclaimer

All product information is subject to change without notice.
Please contact Red Sky Lighting or your sales representative for the most up-to-date specifications.