

**FCC Part15, Subpart B**

**TEST REPORT**

*For*

**Hazloc LED Luminaire**

**MODEL NUMBER: FEL-C-120-V01, FEL-C-150-V01**

**REPORT NUMBER: 4791192212-10**

**ISSUE DATE: February 07, 2024**

*Prepared for*

**RED SKY LIGHTING (HONG KONG) LIMITED**  
**Unit 205, Building 2E, Hong Kong Science Park Pak Shek Kok, New Territories,**  
**Hong Kong**

*Prepared by*

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch**

**Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China**

**Tel: +86 769 22038881**

**Fax: +86 769 33244054**

**Website: [www.ul.com](http://www.ul.com)**

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	10/11/2023	Initial Issue	Andy Xiong
V1	02/07/2024	Changed the information of applicant and manufacturer	Andy Xiong

Note: This is a copy report base on 4790956930-10 which was issued by UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch on October 11, 2023. The customer need to add a new applicant and manufacturer, we only updated the information base on the original test report without any test. For more information, please refer to the original report.

Summary of Test Results				
Standard	Test Item	Limit	Result	Remark
FCC Part15, Subpart B ANSI C63.4-2014	Conducted Disturbance	Class B	PASS	NOTE (2)
	Radiated Disturbance below 1 GHz	Class B	PASS	
	Radiated Disturbance above 1 GHz	Class B	N/A	NOTE (1) NOTE (3)

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) This test is only applicable for devices which can be charged or powered by AC power cable.

(3) If the highest frequency of the internal sources of the EUT is less than 108 MHz, the measurement shall only be made up to 1 GHz. If the highest frequency of the internal sources of the EUT is between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. If the highest frequency of the internal sources of the EUT is between 500 MHz and 1 GHz, measurement shall only be made up to 5 GHz. If the highest frequency of the internal sources of the EUT is above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40 GHz, whichever is less.

(4) This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

(5) The measurement result for the sample received is <Pass> according to < FCC Part15, Subpart B > when <Simple Acceptance> decision rule is applied.

## CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>TEST MODE .....</i>	<i>8</i>
5.3. <i>EUT ACCESSORY .....</i>	<i>8</i>
5.4. <i>SUPPORT UNITS FOR SYSTEM TEST .....</i>	<i>8</i>
<b>6. MEASURING EQUIPMENT AND SOFTWARE USED .....</b>	<b>9</b>
<b>7. EMISSION TEST .....</b>	<b>10</b>
7.1. <i>CONDUCTED EMISSIONS MEASUREMENT .....</i>	<i>10</i>
7.2. <i>RADIATED EMISSIONS MEASUREMENT .....</i>	<i>16</i>
<b>APPENDIX I: PHOTOGRAPHS OF TEST CONFIGURATION .....</b>	<b>24</b>
<b>APPENDIX II: PHOTOGRAPHS OF THE EUT .....</b>	<b>26</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: RED SKY LIGHTING (HONG KONG) LIMITED  
Address: Unit 205, Building 2E, Hong Kong Science Park Pak Shek Kok,  
New Territories, Hong Kong

### Manufacturer Information

Company Name: NJZ Lighting Technology Co., Ltd  
Address: Room 516, No.8 Hengfei Road, Nanjing Economic and  
Technological Development Zone, Nanjing, Jiangsu, China

### EUT Information

EUT Name: Hazloc LED Luminaire  
Model: FEL-C-150-V01  
Serial Model: FEL-C-120-V01  
Brand: /  
Sample Received Date: August 28, 2023  
Sample Status: Normal  
Sample ID: 6396327  
Date of Tested: September 5, 2023 ~ September 27, 2023

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part15, Subpart B	PASS


Prepared By:



---

Andy Xiong  
Engineer Project Associate

Checked By:

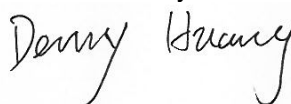

---

Denny Huang  
Senior Project Engineer

Approved By:



---

Stephen Guo  
Laboratory Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC Part15 Subpart B & ANSI C63.4-2014.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Measurement Frequency Range	K	U(dB)
Conducted emissions from the AC mains power ports	0.009 MHz ~ 0.15 MHz	2	4.00
Conducted emissions from the AC mains power ports	0.15 MHz ~ 30 MHz	2	3.62
Radiated emissions	30 MHz ~ 1 GHz	2	4.00
Radiated emissions	1 GHz ~ 18 GHz	2	5.78

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name:	Hazloc LED Luminaire	
Model:	FEL-C-150-V01	
Serial Model:	FEL-C-120-V01	
Model Difference:	Their electrical circuit design, layout, components used and internal wiring are identical, only input current, power and model name is different. We select "FEL-C-150-V01" which with max power as the representative model for compliance test.	
Ratings:	FEL-C-120-V01	Input: AC120-277V, 1.36/0.43A
	FEL-C-150-V01	Input: AC120-277V, 1.7/0.54A

### 5.2. TEST MODE

Test Mode	Description
Mode 1	Normal Working

### 5.3. EUT ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

### 5.4. SUPPORT UNITS FOR SYSTEM TEST

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Specification	Series No.
/	/	/	/	/	/

The following cables were used to form a representative test configuration during the tests.

Item	Type of cable	Shielded Type	Ferrite Core	Length
C-1	AC cable	Unshielded	NO	1.0 m



## 6. MEASURING EQUIPMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	101961	Oct. 17, 2022	Oct. 16, 2023
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101983	Oct. 17, 2022	Oct. 16, 2023
Software					
Description		Manufacturer		Name	Version
Test Software for Conducted Emissions		Farad		EZ-EMC	Ver. UL-3A1
Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KEYSIGHT	N9038A	MY56400036	Oct. 17, 2022	Oct. 16, 2023
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 2, 2021	Aug. 1, 2024
Preamplifier	HP	8447D	2944A09099	Oct. 17, 2022	Oct. 16, 2023
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1

## 7. EMISSION TEST

### 7.1. CONDUCTED EMISSIONS MEASUREMENT

#### LIMITS

CFR 47 FCC Part15 Subpart B				
FREQUENCY (MHz)	Class A (dBμV)		Class B (dBμV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46*
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### TEST PROCEDURE

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

## TEST SETUP

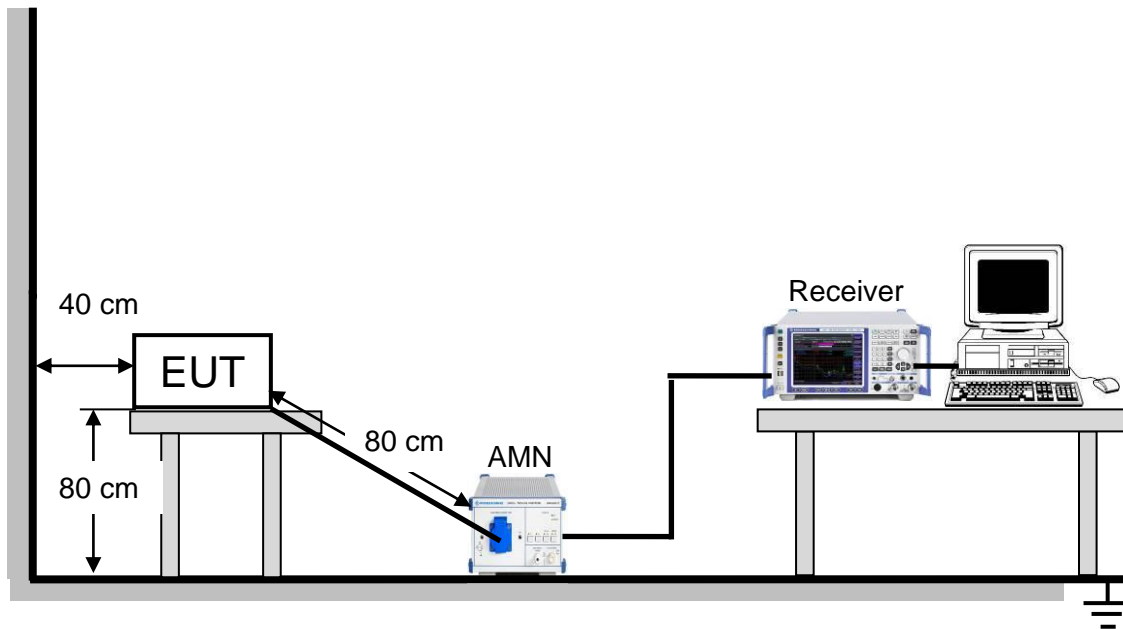

For the actual test configuration, please refer to Appendix I: Photographs of Test Configuration.

## TEST ENVIRONMENT


Temperature	23.2 °C	Relative Humidity	56.3 %
Atmosphere Pressure	101 kPa		

## TEST MODE

Pre-test Mode:	Mode 1
Final Test Mode:	Mode 1

## TEST RESULTS


Conducted Emissions			
Test Mode:	Mode 1	Phase:	Line
Test Voltage	AC 120 V/60 Hz		

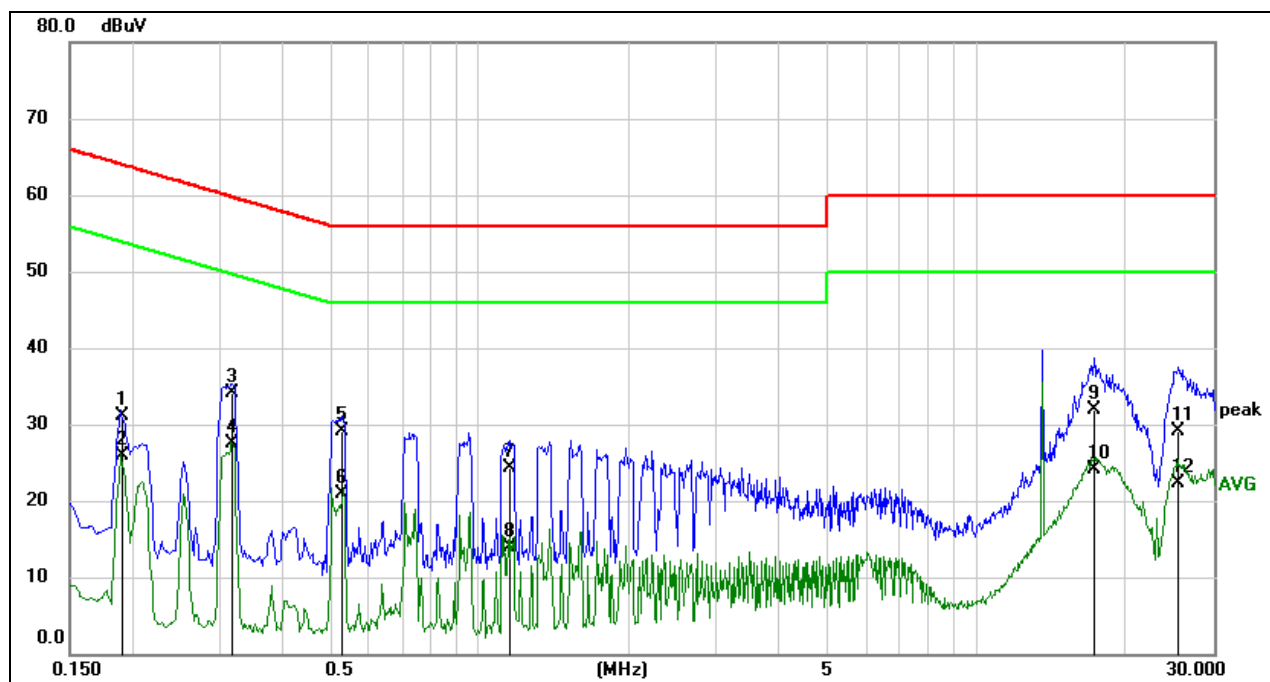

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1913	21.52	9.59	31.11	63.98	-32.87	QP
2	0.1913	16.36	9.59	25.95	53.98	-28.03	AVG
3	0.3195	24.50	9.59	34.09	59.72	-25.63	QP
4	0.3195	17.85	9.59	27.44	49.72	-22.28	AVG
5	0.5313	19.57	9.60	29.17	56.00	-26.83	QP
6	0.5313	11.26	9.60	20.86	46.00	-25.14	AVG
7	1.1469	14.71	9.61	24.32	56.00	-31.68	QP
8	1.1469	4.37	9.61	13.98	46.00	-32.02	AVG
9	17.2769	22.06	9.78	31.84	60.00	-28.16	QP
10	17.2769	14.39	9.78	24.17	50.00	-25.83	AVG
11	25.5548	19.36	9.74	29.10	60.00	-30.90	QP
12	25.5548	12.59	9.74	22.33	50.00	-27.67	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)  
2. Margin = Result - Limit


Conducted Emissions			
Test Mode:	Mode 1	Phase:	Neutral
Test Voltage	AC 120 V/60 Hz		

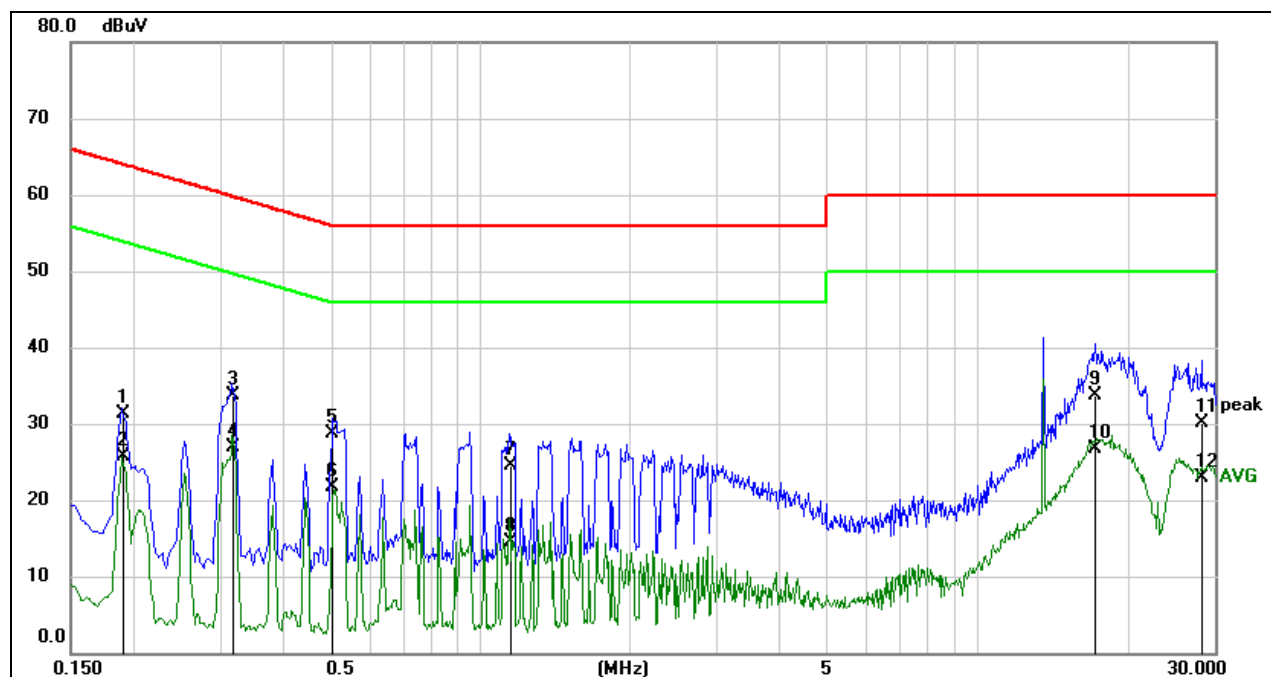

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1913	21.73	9.57	31.30	63.98	-32.68	QP
2	0.1913	16.14	9.57	25.71	53.98	-28.27	AVG
3	0.3191	24.07	9.55	33.62	59.73	-26.11	QP
4	0.3191	17.29	9.55	26.84	49.73	-22.89	AVG
5	0.5086	19.27	9.50	28.77	56.00	-27.23	QP
6	0.5086	12.22	9.50	21.72	46.00	-24.28	AVG
7	1.1505	15.00	9.53	24.53	56.00	-31.47	QP
8	1.1505	5.04	9.53	14.57	46.00	-31.43	AVG
9	17.2695	23.94	9.68	33.62	60.00	-26.38	QP
10	17.2695	17.00	9.68	26.68	50.00	-23.32	AVG
11	28.3030	20.44	9.74	30.18	60.00	-29.82	QP
12	28.3030	13.16	9.74	22.90	50.00	-27.10	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)  
2. Margin = Result – Limit


Conducted Emissions			
Test Mode:	Mode 1	Phase:	Line
Test Voltage	AC 277 V/60 Hz		

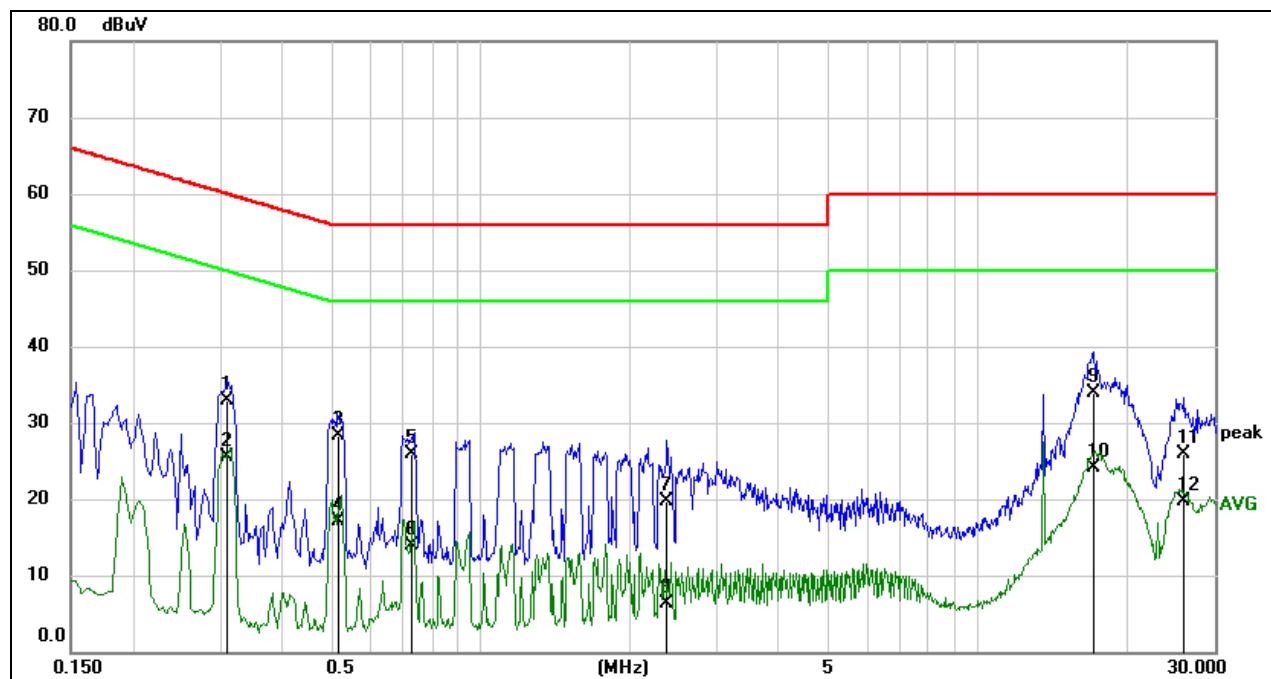

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.3112	23.33	9.59	32.92	59.94	-27.02	QP
2	0.3112	15.82	9.59	25.41	49.94	-24.53	AVG
3	0.5192	18.67	9.60	28.27	56.00	-27.73	QP
4	0.5192	7.50	9.60	17.10	46.00	-28.90	AVG
5	0.7302	16.29	9.60	25.89	56.00	-30.11	QP
6	0.7302	4.31	9.60	13.91	46.00	-32.09	AVG
7	2.3828	10.09	9.65	19.74	56.00	-36.26	QP
8	2.3828	-3.42	9.65	6.23	46.00	-39.77	AVG
9	17.1846	24.05	9.78	33.83	60.00	-26.17	QP
10	17.1846	14.30	9.78	24.08	50.00	-25.92	AVG
11	26.0395	16.17	9.73	25.90	60.00	-34.10	QP
12	26.0395	10.02	9.73	19.75	50.00	-30.25	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)  
2. Margin = Result - Limit

Conducted Emissions			
Test Mode:	Mode 1	Phase:	Neutral
Test Voltage	AC 277 V/60 Hz		

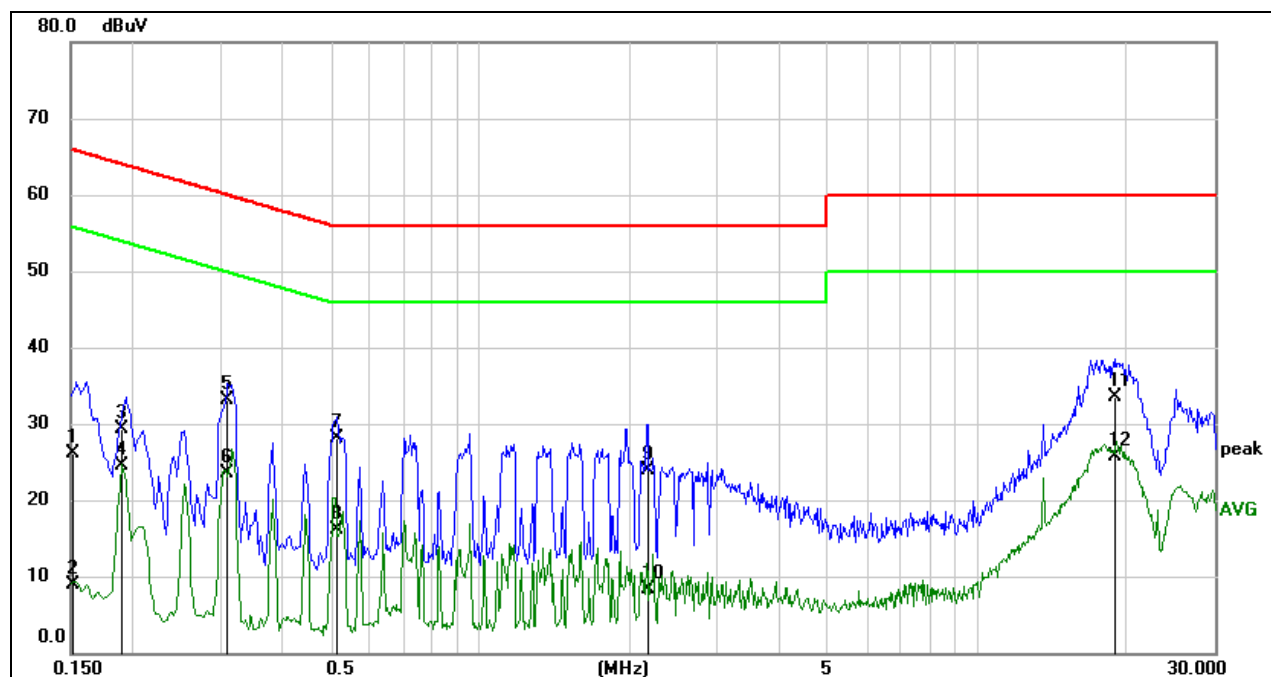

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1512	16.56	9.49	26.05	65.93	-39.88	QP
2	0.1512	-0.50	9.49	8.99	55.93	-46.94	AVG
3	0.1895	19.80	9.57	29.37	64.06	-34.69	QP
4	0.1895	15.02	9.57	24.59	54.06	-29.47	AVG
5	0.3112	23.46	9.55	33.01	59.94	-26.93	QP
6	0.3112	14.02	9.55	23.57	49.94	-26.37	AVG
7	0.5171	18.70	9.50	28.20	56.00	-27.80	QP
8	0.5171	6.54	9.50	16.04	46.00	-29.96	AVG
9	2.1751	14.32	9.63	23.95	56.00	-32.05	QP
10	2.1751	-1.30	9.63	8.33	46.00	-37.67	AVG
11	18.9859	23.78	9.72	33.50	60.00	-26.50	QP
12	18.9859	15.91	9.72	25.63	50.00	-24.37	AVG

Note: 1. Result = Reading +Correct (Insertion Loss + Cable Loss + Attenuator Factor)

2. Margin = Result - Limit

## 7.2. RADIATED EMISSIONS MEASUREMENT

### LIMITS

Below 1 GHz

CFR 47 FCC Part 15 Subpart B		
Frequency (MHz)	Class A	Class B
	Field strength (dBuV/m) (at 3 m)	Field strength (dBuV/m) (at 3 m)
30 - 88	49.5	40
88 - 216	53.9	43.5
216 - 960	56.9	46
Above 960	60	54

Above 1 GHz

CFR 47 FCC Part 15 Subpart B				
Frequency (MHz)	Class A		Class B	
	(dBuV/m) (at 3 m)		(dBuV/m) (at 3 m)	
	Peak	Average	Peak	Average
Above 1000	80	60	74	54

Test Frequency Range of Radiated Disturbance Measurement

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 - 108	1000
108 - 500	2000
500 - 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower


NOTE:

- (1) The limit for radiated test was performed according to FCC Part 15, Subpart B;
- (2) The tighter limit applies at the band edges;
- (3) Emission level (dBuV/m) = 20log Emission level (uV/m),  
3m Emission level = 10 m Emission level + 20log(10 m/3 m);



## TEST SETUP AND PROCEDURE

Below 1 GHz and above 30 MHz

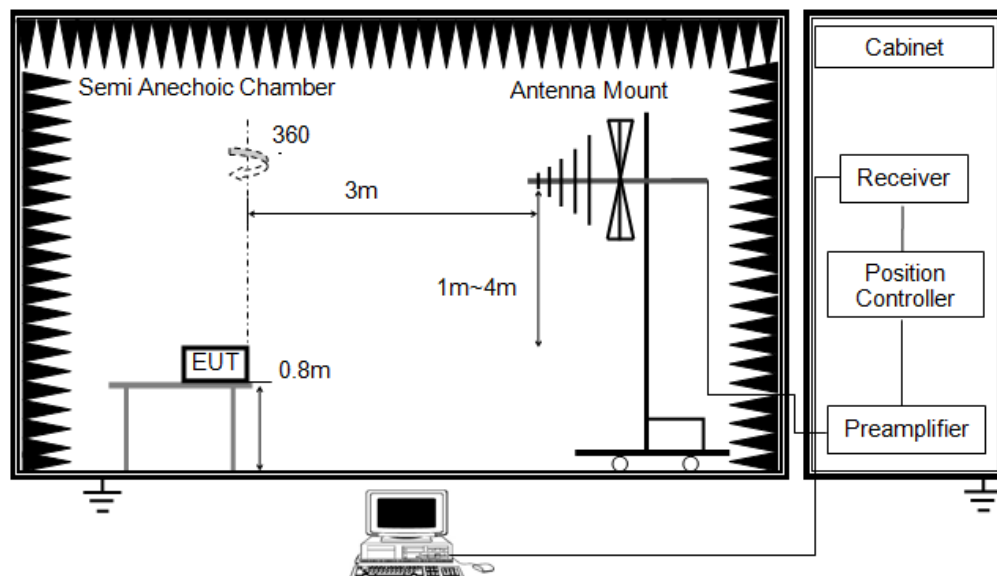


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak and QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp was used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
8. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

Above 1 GHz

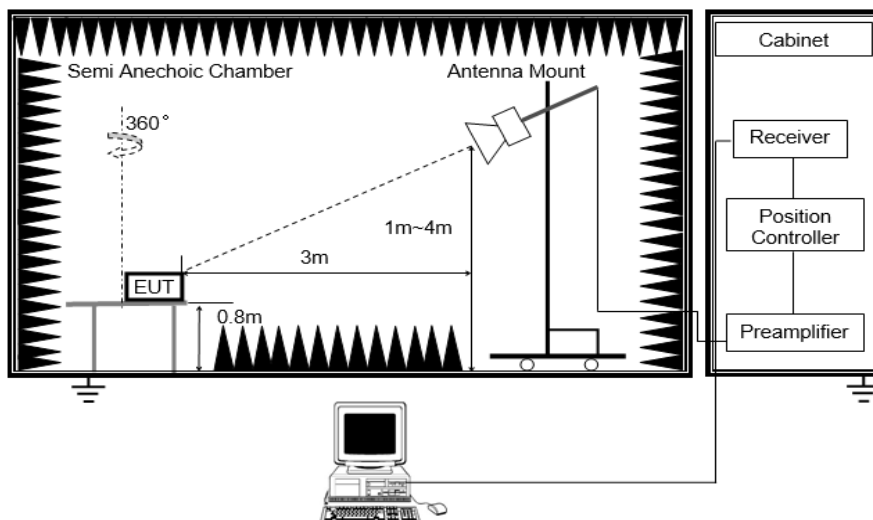

The setting of the spectrum analyser

RBW	1 MHz
VBW	3 MHz
Sweep	Auto
Detector	Peak: Peak AVG: RMS
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.4-2014.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. Cables of hand-operated devices, such as keyboards and mice, shall be placed as for normal used.
7. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
8. For measurement above 1 GHz, the peak emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the peak limit specified in Section 15.109. If peak result complies with average limit, average result is deemed to comply with average limit.
9. The average emission measurement will be measured by the RMS detector and must comply with the average limit specified in Section 15.109.

**TEST ENVIRONMENT**


Radiated Emissions - Below 1 GHz		Radiated Emissions - Above 1 GHz	
Temperature:	22.5 °C	Temperature:	/
Humidity:	57.0 %	Humidity:	/
Atmosphere Pressure	101 kPa	Atmosphere Pressure	/

**TEST MODE**

Radiated Emissions - Below 1 GHz		Radiated Emissions - Above 1 GHz	
Pre-test Mode:	Mode 1	Pre-test Mode:	/
Final Test Mode:	Mode 1	Final Test Mode:	/

## TEST RESULTS


Radiated Emissions – Below 1 GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 1	Test Voltage:	AC 120 V/60 Hz

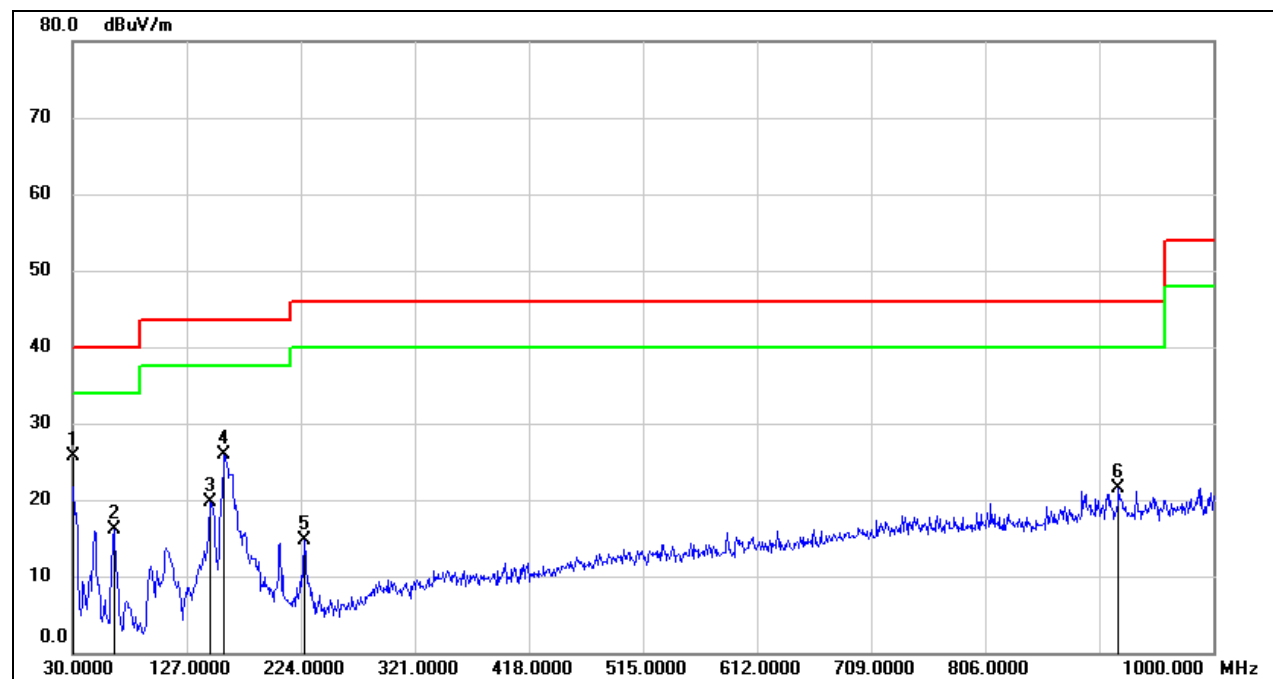

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	43.90	-18.24	25.66	40.00	-14.34	QP
2	64.9200	36.56	-20.54	16.02	40.00	-23.98	QP
3	146.4000	38.28	-18.55	19.73	43.50	-23.77	QP
4	159.0100	43.49	-17.63	25.86	43.50	-17.64	QP
5	226.9100	32.45	-17.81	14.64	46.00	-31.36	QP
6	919.4900	26.10	-4.62	21.48	46.00	-24.52	QP

Note: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)  
2. Margin = Result - Limit

Radiated Emissions – Below 1 GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 1	Test Voltage:	AC 120 V/60 Hz

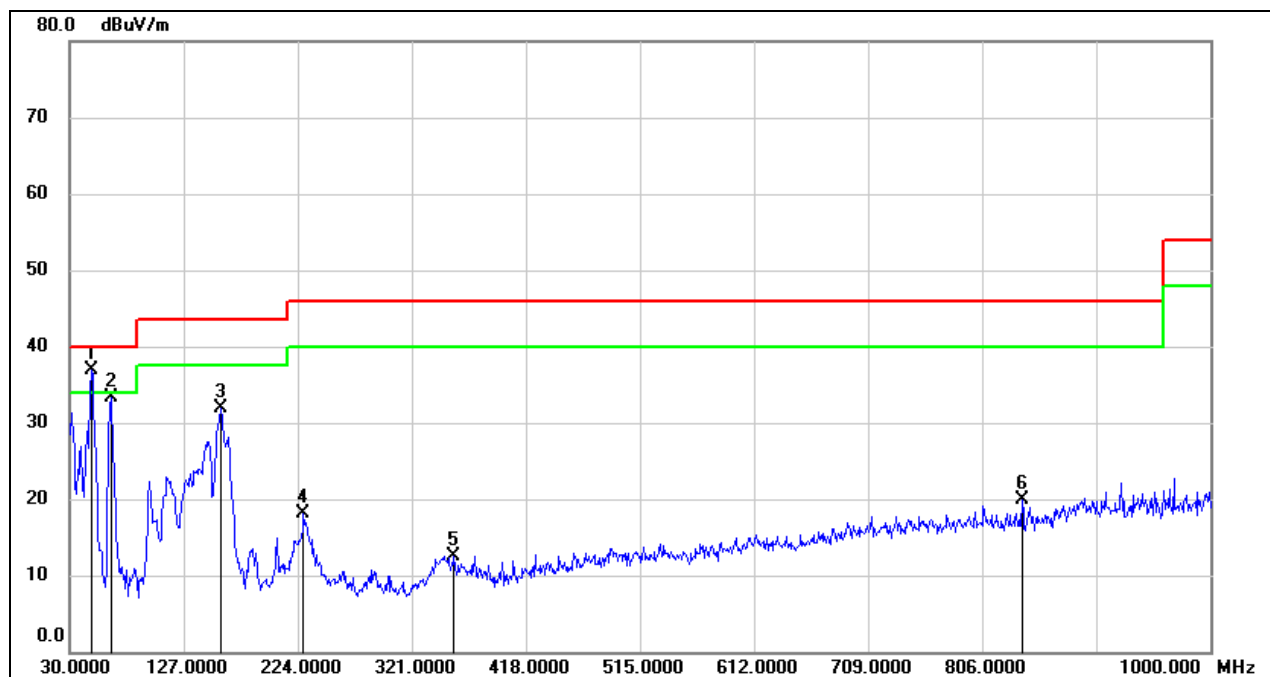


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	48.4300	57.31	-20.44	36.87	40.00	-3.13	QP
2	64.9200	53.91	-20.54	33.37	40.00	-6.63	QP
3	159.0100	49.47	-17.63	31.84	43.50	-11.66	QP
4	228.8500	36.04	-17.90	18.14	46.00	-27.86	QP
5	356.8900	25.46	-12.95	12.51	46.00	-33.49	QP
6	839.9500	26.24	-6.33	19.91	46.00	-26.09	QP

Note: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

Radiated Emissions – Below 1 GHz			
Measurement Method	Radiated	Polar:	Horizontal
Test Mode:	Mode 1	Test Voltage:	AC 277 V/60 Hz

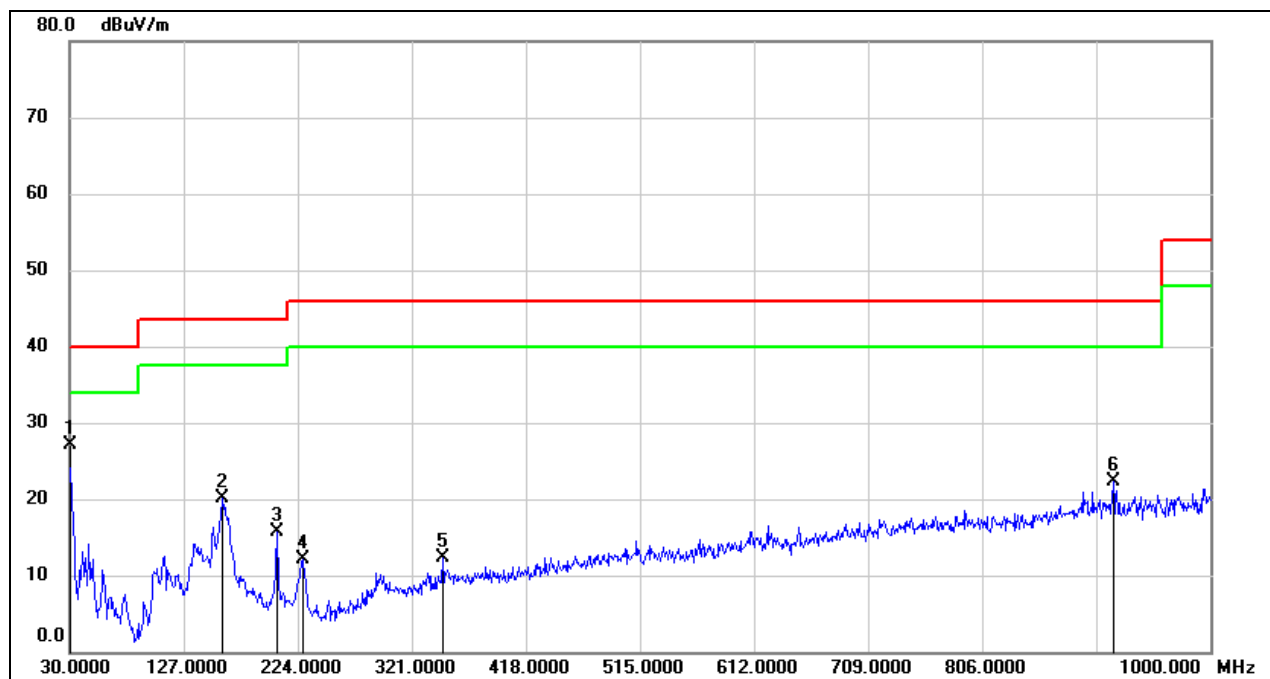


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	45.30	-18.24	27.06	40.00	-12.94	QP
2	159.9800	37.61	-17.55	20.06	43.50	-23.44	QP
3	206.5399	32.63	-16.89	15.74	43.50	-27.76	QP
4	228.8500	29.93	-17.90	12.03	46.00	-33.97	QP
5	347.1900	25.32	-13.08	12.24	46.00	-33.76	QP
6	917.5500	27.01	-4.64	22.37	46.00	-23.63	QP

Note: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit

Radiated Emissions – Below 1 GHz			
Measurement Method	Radiated	Polar:	Vertical
Test Mode:	Mode 1	Test Voltage:	AC 277 V/60 Hz

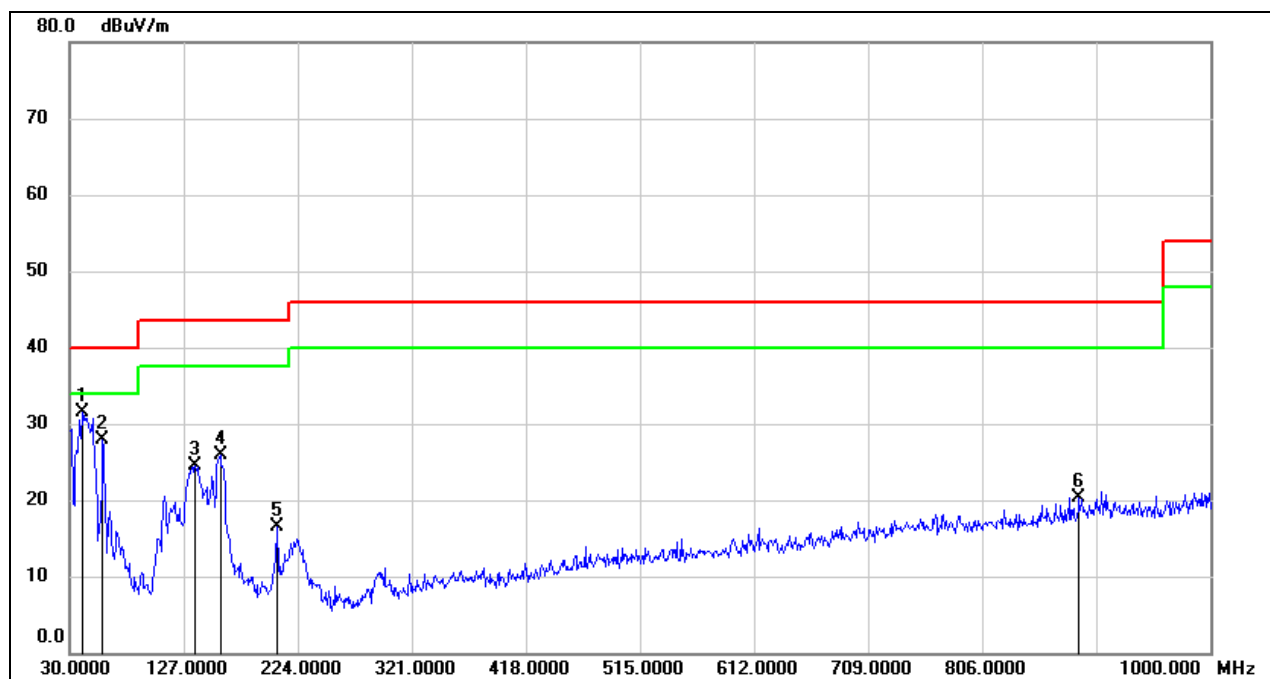

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	40.6699	51.43	-19.94	31.49	40.00	-8.51	QP
2	58.1300	48.32	-20.35	27.97	40.00	-12.03	QP
3	136.7000	43.43	-19.00	24.43	43.50	-19.07	QP
4	158.0399	43.54	-17.71	25.83	43.50	-17.67	QP
5	206.5399	33.30	-16.89	16.41	43.50	-27.09	QP
6	888.4500	25.35	-4.98	20.37	46.00	-25.63	QP

Note: 1. Result = Reading +Correct (Amplifier Factor + Cable Loss + Antenna Factor)

2. Margin = Result - Limit



## APPENDIX I: PHOTOGRAPHS OF TEST CONFIGURATION

Conducted Emissions test setup photo






Radiated Emissions below 1 GHz test setup photo

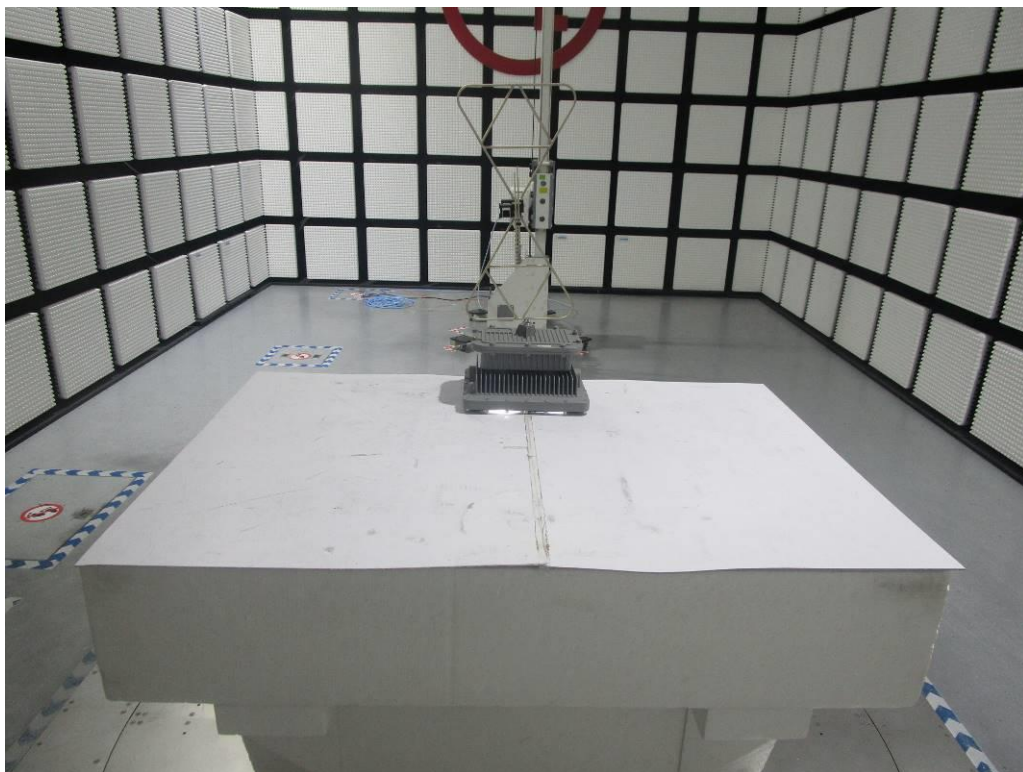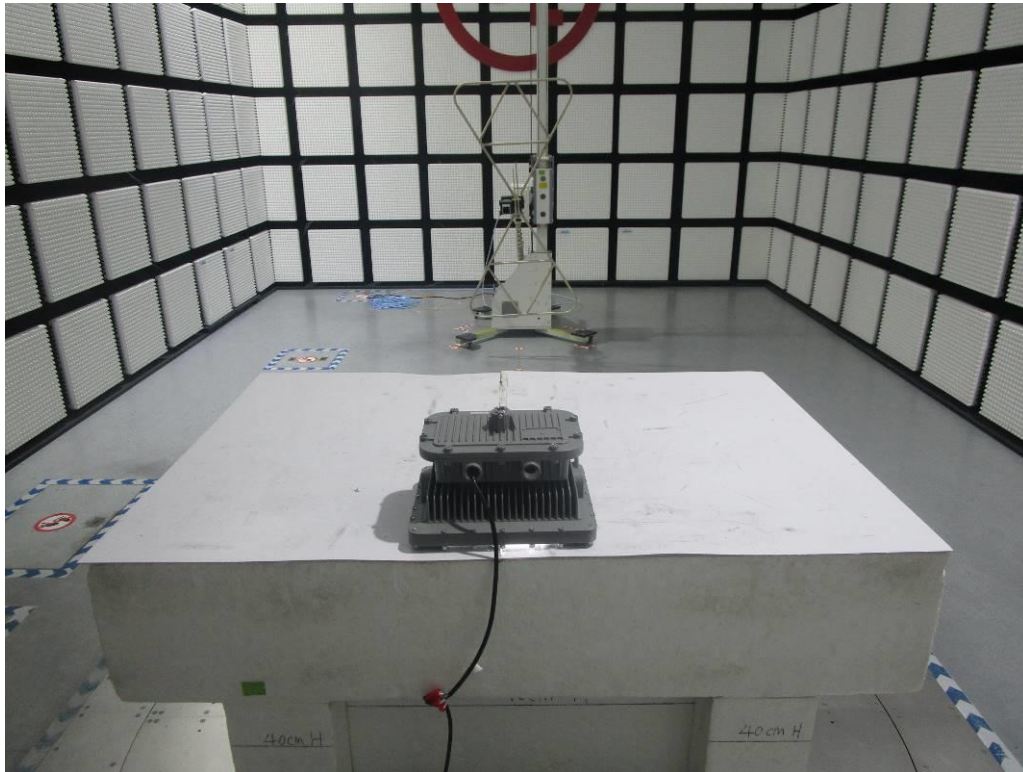

## APPENDIX II: PHOTOGRAPHS OF THE EUT

External Photos

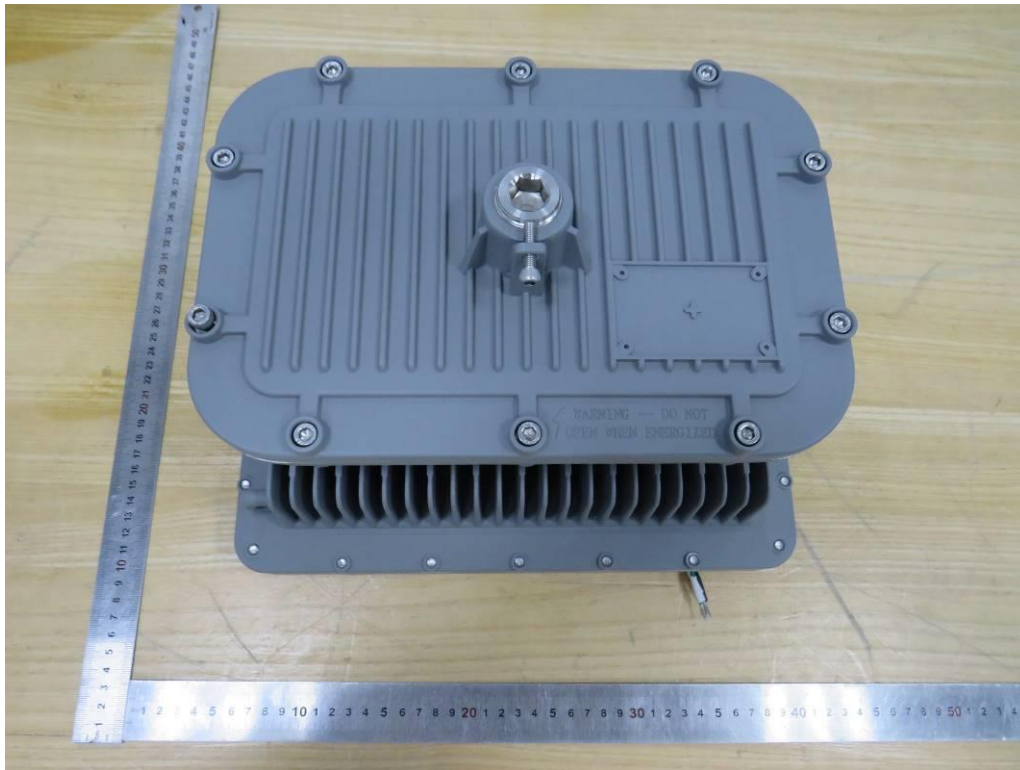







Internal Photos



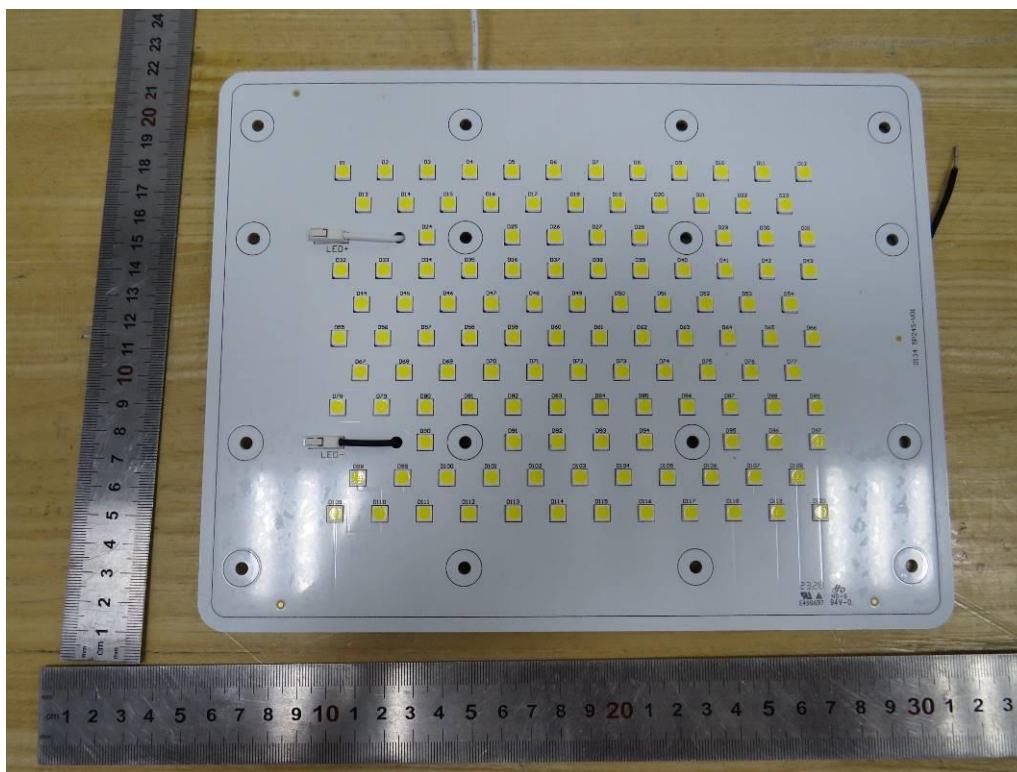

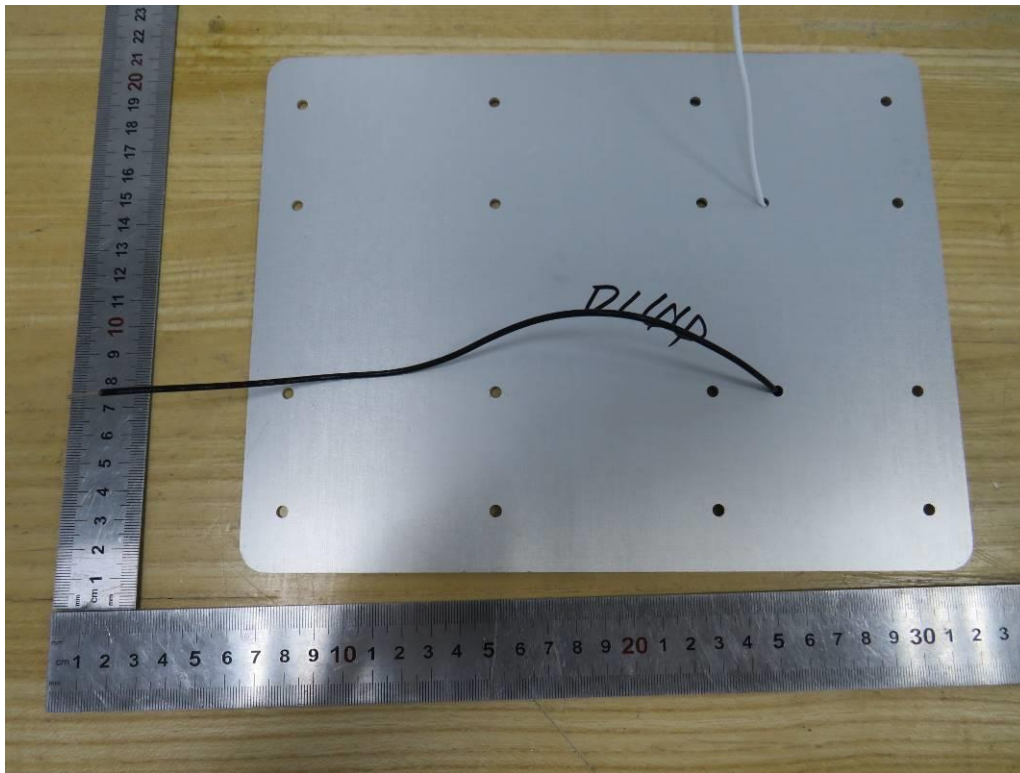

---

**END OF REPORT**